

XML API for Mitel SIP Phones

Firmware 4.1.0

JULY 2015

PA-001011-05-00

DEVELOPMENT GUIDE



The information conveyed in this document is confidential and proprietary to Mitel® and is intended solely for Mitel employees and members of Mitel's reseller channel who specifically have a need to know this information. If you are not a Mitel employee or a Mitel authorizedPARTNER, you are not the intended recipient of this information. Please delete or return any related material. Mitel will enforce its right to protect its confidential and proprietary informationand failure to comply with the foregoing may result in legal action against you or your company.

TABLE OF CONTENTS

1	Introduction	15
1.1	MITEL XML API.....	15
1.2	<i>Revision History</i>	15
1.2.1	Version 4.1.0 (6863i / 6865i / 6867i / 6869i)	15
1.2.2	Version 4.0.0 SP2 (6863i / 6865i / 6867i / 6869i).....	15
1.2.3	Version 4.0.0 SP1 (6863i / 6865i / 6867i / 6869i).....	15
1.2.4	Version 4.0.0 (6863i / 6865i / 6867i / 6869i)	15
1.2.5	Version 3.3.1 SP4 (9143i / 9480i / 9480iCT / 6730i / 6731i / 6739i / 53i / 55i / 57i / 57iCT / 6863i / 6865i / 6867i)	15
1.2.6	Version 3.3.1 SP3 (9143i / 9480i / 9480iCT / 6730i / 6731i / 6739i / 53i / 55i / 57i / 57iCT / 6863i / 6865i / 6867i)	15
1.2.7	Version 3.3.1 (9143i/9480i/9480iCT/6730i/6731i/6739i/53i/55i/57i/57iCT)	16
1.2.8	Version 3.3.1 (9143i/9480i/9480iCT/6730i/6731i/6739i/53i/55i/57i/57iCT)	16
1.2.9	Version 3.3.0 (9143i/9480i/9480iCT/6730i/6731i/6739i/53i/55i/57i/57iCT)	16
1.2.10	Version 3.2.2 (9143i/9480i/9480iCT/6730i/6731i/6735i/6737i/6739i/53i/55i/57i/57iCT)	16
1.2.11	Version 3.2.2 (9143i/9480i/9480iCT/6730i/6731i/6739i/53i/55i/57i/57iCT)	16
1.2.12	Version 3.2.1 (9143i/9480i/9480iCT/6730i/6731i/6739i/53i/55i/57i/57iCT)	16
1.2.13	Version 3.2.0 (9143i/9480i/9480iCT/6730i/6731i/6739i/53i/55i/57i/57iCT)	17
1.2.14	Version 3.0.1 (6739i).....	17
1.2.15	Version 3.0.0 (6739i).....	18
1.2.16	Version 2.6.0 (9143i/9480i/9480iCT/6730i/6731i/51i/53i/55i/57i/57i CT)	18
1.2.17	Version 2.5.3 (9143i/9480i/9480iCT/6730i/6731i/51i/53i/55i/57i/57iCT)	18
1.2.18	Version 2.5.2 (9143i/9480i/9480iCT/6730i/6731i/51i/53i/55i/57i/57i CT)	18
1.2.19	Version 2.4.1 (9143i/9480i/9480iCT/6730i/6731i/51i/53i/55i/57i/57i CT)	18
1.2.20	Version 2.4.0 (9143i/9480i/9480iCT/51i/53i/55i/57i/57i CT)	19
1.2.21	Version 2.3.1 (9143i/9480i/9480iCT/51i/53i/55i/57i/57i CT).....	19
1.2.22	Version 2.3.0 (9143i/9480i/9480iCT/51i/53i/55i/57i/57i CT).....	19
1.2.23	Version 2.2.1 (9143i/9480i/9480iCT/51i/53i/55i/57i/57i CT).....	20
1.2.24	Version 2.2.0 (51i/53i/55i/57i/57i CT).....	20
1.2.25	Version 2.1.1 (51i/53i/55i/57i/57i CT).....	20
1.2.26	Version 2.1.0 (53i/55i/57i/57i CT)	21
1.2.27	Version 2.0.2 (53i/55i/57i/57i CT)	21
1.2.28	Version 2.0.1 (53i/55i/57i/57i CT)	21
1.2.29	Version 1.4.2 (9112i/9133i/480i/480i CT).....	22
1.2.30	Version 1.4.1 (9112i/9133i/480i/480i CT).....	22
1.2.31	Version 1.3.1 (9112i/9133i/480i/480i CT).....	22
1.2.32	Version 1.3.0 (9112i/9133i/480i/480i CT).....	23

2	XML and the MITEL IP Phones	24
2.1	<i>What is XML?</i>	24
2.2	<i>Functionality.....</i>	24
2.3	<i>How does it work?</i>	25
2.3.1	Phone initiated application	25
2.3.2	Server initiated application	25
2.4	<i>System Architecture.....</i>	26
2.4.1	Corporate applications	26
2.4.2	Telephony applications.....	26
2.5	<i>Development environment.....</i>	27
2.5.1	Typical software architecture.....	27
2.5.2	Web server.....	28
2.5.3	Scripts/Languages.....	28
2.5.4	XML Validation tools.....	28
2.6	<i>XML format</i>	28
2.7	<i>HTTP format</i>	28
2.8	<i>XML display control and keys</i>	29
2.8.1	Mitel 6730i/6731i	30
2.8.2	Mitel 6753i.....	31
2.8.3	Mitel 6755i/6735i	32
2.8.4	Mitel 6757i/6757iCT/6737i.....	33
2.8.5	Mitel 9143i.....	34
2.8.6	Mitel 9480i/9480iCT	35
2.8.7	Mitel 6739i.....	36
2.8.8	Mitel 6863i.....	37
2.8.9	Mitel 6865i.....	38
2.8.10	Mitel 6867i.....	39
2.8.11	Mitel 6869i.....	40
3	Mitel IP Phone XML Objects.....	41
3.1	<i>TextMenu Object (All models).....</i>	41
3.1.1	Implementation (softkey and non softkey phones)	41
3.1.2	Implementation (6739i).....	42
3.1.3	XML Description	43
3.1.4	Dialing from a TextMenu	49
3.1.5	TextMenu styles (when supported)	50
3.1.6	Examples	51
3.2	<i>ImageMenu Object (55i/57i/57iCT/6735i/6737i/6739i/6867i/6869i)</i>	56
3.2.1	Implementation (55i/57i/57iCT/6535i/6737i)	56
3.2.2	Implementation (6867i).....	56

3.2.3	Implementation (6869i)	58
3.2.4	Implementation (6739i)	60
3.2.5	XML Description.....	63
3.2.6	Examples	66
3.3	<i>TextScreen Object (all models)</i>	67
3.3.1	Implementation (softkey and non softkey phones).....	67
3.3.2	Implementation (6867i/6869i)	68
3.3.3	Implementation (6739i)	70
3.3.4	XML Description.....	71
3.3.5	Examples	75
3.4	<i>FormattedTextScreen Object (all models)</i>	78
3.4.1	Implementation (softkey and non softkey phones).....	78
3.4.2	Implementation (6867i/6869i)	79
3.4.3	Implementation (6739i)	81
3.4.4	XML Description.....	83
3.4.5	Examples	89
3.5	<i>ImageScreen Object (55i/57i/57iCT/6735i/6737i/6867i/6869i/6739i)</i>	93
3.5.1	Implementation (55i/57i/57iCT/6735i/6737i)	93
3.5.2	Implementation (6867i/6869i)	93
3.5.3	Implementation (6739i)	96
3.5.4	XML Description.....	98
3.5.5	Examples	102
3.6	<i>InputScreen Object – Single Input field (all models)</i>	103
3.6.1	Implementation (non softkey and softkey phones).....	104
3.6.2	Implementation on the 6867i/6869i	104
3.6.3	Implementation (6739i)	106
3.6.4	XML Description.....	106
3.6.5	Input Type: IP	111
3.6.6	Input Type: Number	113
3.6.7	Input Type: String or StringN	115
3.6.8	Input Type: timeUS	117
3.6.9	Input Type: timeInt	119
3.6.10	Input Type: dateUS.....	121
3.6.11	Input Type: dateInt	123
3.7	<i>InputScreen Object – Multiple Input fields (55i / 57i / 57iCT / 9480i / 9480iCT / 6735i / 6737i / 6739 / 6867i / 6869i)</i>	126
3.7.1	Implementation (softkey phones).....	126
3.7.2	Implementation on the 6867i/6869i	126
3.7.3	Implementation on the 6739i.....	128
3.7.4	XML Description.....	129

3.7.5	Examples	137
3.8	<i>PhoneCallLog Object (6739i only)</i>	141
3.8.1	Implementation.....	141
3.8.2	XML Description.....	143
3.8.3	Examples	146
3.9	<i>PhoneStatus Object</i>	147
3.9.1	Implementation (non softkey and softkey phones)	147
3.9.2	Implementation on the 6739i	148
3.9.3	XML Description.....	149
3.9.4	Examples	152
3.10	<i>PhoneExecute Object (all models)</i>	154
3.10.1	Implementation.....	154
3.10.2	XML Description.....	155
3.10.3	Examples	155
3.11	<i>PhoneConfiguration Object (all models)</i>	157
3.11.1	Implementation.....	157
3.11.2	XML Description	158
3.11.3	Examples	159
4	XML extensions	161
4.1	<i>Customizable Softkeys (softkey phones)</i>	161
4.2	<i>Graphics (55i/57i/57iCT/6735i/6737i/6867i/6869i/6739i)</i>	168
4.2.1	Images	168
4.2.2	Icons.....	171
4.3	<i>LED control</i>	178
4.4	<i>RTP streaming</i>	181
4.4.1	RTPRx.....	181
4.4.2	RTPTx.....	183
4.4.3	RTPMRx.....	184
4.4.4	RTPMTx.....	186
4.4.5	Interaction with action uris.....	187
4.5	<i>Keypress emulation</i>	187
4.6	<i>Wav file streaming</i>	189
4.6.1	XML Commands.....	189
4.6.2	File format	190
4.6.3	Interaction with action uris	190
4.7	<i>Wav file loop playback (melody)</i>	191
4.7.1	XML Commands.....	192
4.7.2	File format	192
4.8	<i>Dial and DialLine URIs</i>	193

4.9	<i>Crash and configuration files retrieval</i>	193
4.10	<i>Special attributes</i>	194
4.10.1	Beep	194
4.10.2	Timeout.....	194
4.10.3	LockIn	194
4.10.4	triggerDestroyOnExit.....	194
4.11	<i>TextMenu user selection (6735i, 6737i, 6739i, 55i, 57i, 57iCT, 9480i, 9480iCT, 6867i, 6869i)</i>	194
4.12	<i>TextMenu item formatting on 2 lines (55i/57i/57iCT/9480i/9480iCT/6735i/6737i)</i>	195
4.13	<i>“Select” and “Dial” in the same TextMenu object</i>	199
4.14	<i>“Select”, “Dial” and “Dial2” behavior in a TextMenu object</i>	199
4.15	<i>Refresh of an XML page</i>	199
4.16	<i>HTTP headers format for a phone HTTP GET</i>	200
4.16.1	User-Agent.....	200
4.16.2	X-Aaastra-ExpModi.....	202
4.16.3	Accept-Language.....	202
4.17	<i>Some development guidelines</i>	202
5	URL Format and Variables	204
5.1	<i>URL format</i>	204
5.2	<i>URL Variables</i>	204
5.2.1	Variables related to the active line	205
5.2.2	Variables related to the current call.....	206
5.2.3	Usage with action uris.....	206
5.2.4	Phone State	207
5.3	<i>HTTPS</i>	208
5.3.1	User Certificates	208
5.3.2	Configuration	209
5.4	<i>XML Objects Pushed to the Phone</i>	211
6	Action URIs	214
6.1	<i>Configuration</i>	214
6.2	<i>Action uri detailed behavior</i>	215
6.2.1	Action uri offhook	215
6.2.2	Action uri onhook	215
6.2.3	Action uri incoming.....	215
6.2.4	Action uri outgoing	215
6.2.5	Action uri connected	216
6.2.6	Action uri disconnected.....	216
6.2.7	Action uri startup.....	216
6.2.8	Action uri registered.....	217
6.2.9	Action uri registration event	217

6.2.10	Action uri poll.....	217
6.2.11	Action uri xml sip notify.....	217
6.3	<i>“Answer” and “Ignore” keys for action uri incoming.....</i>	219
6.4	<i>“Drop”, “Xfer” and “Conf” keys for XML apps in connected state</i>	219
6.5	<i>Applications</i>	219
7	XML Configuration.....	220
7.1	<i>Configuring a Custom Service from the Web UI</i>	220
7.2	<i>Configuring a Soft or Programmable Key using the phone Web UI.....</i>	220
7.3	<i>Configuring the XML Push Server List using the phone Web UI.....</i>	221
7.4	<i>Configuring the Action URLs using the phone Web UI</i>	222
7.5	<i>Configuring the XML Beep Support using the phone Web UI.....</i>	222
7.6	<i>Configuring the Status Scroll Delay using the phone Web UI.....</i>	223
7.7	<i>Configuring the XML SIP Notify using the phone Web UI.....</i>	224
7.8	<i>XML Configuration using the Configuration Files.....</i>	224
7.8.1	General XML parameters	224
7.8.2	Action uri parameters	231
7.8.3	Programmable and Soft keys	235
7.8.4	Examples	236
8	Troubleshooting XML Applications.....	237
8.1	<i>Introduction</i>	237
8.2	<i>Troubleshooting tools.....</i>	238
8.3	<i>Configuring the Syslog Server using the WebUI.....</i>	238
8.4	<i>Configuring the Syslog server using the configuration files.....</i>	239
8.5	<i>Parsing error debug example.....</i>	239
9	Why XML Applications for an IP Phone?.....	241
9.1	<i>Telephony applications</i>	241
9.1.1	Directory.....	241
9.1.2	Call Processing	241
9.1.3	Voice-Mail	241
9.1.4	Conference Bridge	241
9.1.5	Contact Center	241
9.2	<i>Media and information</i>	241
9.3	<i>Vertical applications</i>	242
9.3.1	Human Resources.....	242
9.3.2	Travel/Hotel.....	242
9.3.3	Health Care	243
9.3.4	Education	243
9.3.5	Law Enforcement	243

10	Phone Self-Configuration using XML	244
10.1	<i>Introduction.....</i>	244
10.2	<i>Message flow</i>	244
10.3	<i>Auto-configuration policy</i>	245
10.4	<i>Architecture</i>	246
11	Sample XML applications	247
11.1	<i>Access from the Internet.....</i>	247
11.2	<i>Local server using XAMPP.....</i>	247
11.2.1	<i>XAMPP installation</i>	248
11.2.2	<i>XML scripts installation</i>	248
11.2.3	<i>XAMPP start and stop.....</i>	248
11.2.4	<i>Test your installation.....</i>	250
11.2.5	<i>Troubleshooting Apache</i>	250
11.3	<i>Applications</i>	250
11.3.1	<i>Area code lookup (US/Canada)</i>	250
11.3.2	<i>Biorhythms.....</i>	251
11.3.3	<i>CNN News</i>	252
11.3.4	<i>Currency Converter.....</i>	253
11.3.5	<i>ESPN News</i>	254
11.3.6	<i>FOX News</i>	255
11.3.7	<i>Horoscope</i>	256
11.3.8	<i>IP Geolocation</i>	257
11.3.9	<i>Movies</i>	257
11.3.10	<i>Netflix.....</i>	258
11.3.11	<i>Stock Quotes</i>	259
11.3.12	<i>Today.....</i>	260
11.3.13	<i>Local Weather.....</i>	261
11.3.14	<i>World Clock</i>	262
11.3.15	<i>Yahtzee.....</i>	262
11.3.16	<i>Global menu</i>	263
12	Appendix A: XSL Model.....	265
13	Appendix B: Object Oriented PHP Classes.....	274
13.1	<i>AastralPPhoneCallLog().....</i>	274
13.2	<i>AastralPPhoneConfiguration().....</i>	276
13.3	<i>AastralPPhoneExecute()</i>	277
13.4	<i>AastralPPhoneFormattedTextScreen()</i>	277
13.5	<i>AastralPPhoneImageMenu()</i>	279
13.6	<i>AastralPPhoneImageScreen()</i>	281

13.7	<i>AastralPPhoneInputScreen()</i> – Single Input field.....	284
13.8	<i>AastralPPhoneInputScreen()</i> – Multiple Input fields	286
13.9	<i>AastralPPhoneStatus()</i>	288
13.10	<i>AastralPPhoneTextMenu()</i>	289
13.11	<i>AastralPPhoneTextScreen()</i>	291
13.12	<i>AastralPPhoneScrollableTextMenu()</i>	293
13.13	<i>AastralPPhoneScrollableDirectory()</i>	295
13.14	<i>Examples provided with the PHP API</i>	297
14	Appendix C: Dynamic Parameters	298
15	Appendix D: Localized input character set	303
15.1	<i>English</i>	303
15.2	<i>French/Français</i>	303
15.3	<i>Spanish/Español</i>	303
15.4	<i>German/Deutsch</i>	304
15.5	<i>Italian/Italiano</i>	304
15.6	<i>Portuguese/Português</i>	305
16	Appendix E: XML Self-Configuration	306
17	Appendix F: CSV based Directory	319
17.1	<i>Introduction</i>	319
17.2	<i>Phone compatibility</i>	319
17.3	<i>Installation</i>	319
17.4	<i>XML key configuration</i>	320
17.5	<i>CSV file format</i>	320
17.6	<i>Configuration files</i>	320
17.6.1	server.conf	320
17.6.2	directory.conf.....	321
17.7	<i>Application Files</i>	321
18	Appendix G: LDAP Directory	323
18.1	<i>Introduction</i>	323
18.2	<i>Installation</i>	323
18.3	<i>Network Requirements</i>	324
18.3.1	Phone -> XML Proxy Server.....	324
18.3.2	XML Proxy Server -> LDAP-Server	324
18.4	<i>Active Directory / LDAP-Server Requirements</i>	324
18.5	<i>Configuration files</i>	324
18.5.1	server.conf	324
18.5.2	ldap_directory.conf	325

19	Appendix H: PictureCallerID (6867i, 6869i, 6739i)	328
19.1	<i>Introduction</i>	328
19.2	<i>Application implementation</i>	328
19.3	<i>Requirements/Compatibility</i>	329
19.3.1	HTTP Server.....	329
19.3.2	Mitel 6739i	329
19.4	<i>Installation</i>	329
19.4.1	Introduction	329
19.4.2	HTTP Server.....	330
19.4.3	Package installation	330
19.4.4	Test your installation.....	330
19.4.5	Troubleshooting	330
19.4.6	Windows PC using XAMPP Lite	330
19.5	<i>Configuration</i>	331
19.5.1	Phone Configuration	331
19.5.2	Application configuration.....	331
19.5.3	Number matching examples	334
19.5.4	Pattern matching examples	334
19.6	<i>Files</i>	336
20	LAST PAGE OF THE DOCUMENT	338

TABLE OF FIGURES

Figure 1: Basic XML document	24
Figure 2: Mitel IP Phone acting as a client	25
Figure 3: Mitel IP Phone acting as a server	25
Figure 4: Access to an internal application.....	26
Figure 5: Access to an Internet application	26
Figure 6: Access to a telephony application.....	27
Figure 7: Typical software architecture of an XML application	27
Figure 8: XML conversion table.....	28
Figure 9: Mitel 6731i XML display and keys.....	30
Figure 10: Mitel 6753i XML display and keys.....	31
Figure 11: Mitel 6755i/6735i XML display and keys	32
Figure 12: Mitel 6757i/6757iCT/6737i XML display and keys.....	33
Figure 13: Mitel 9413i XML display and keys.....	34
Figure 14: Mitel 9480i/9480iCT XML display and keys	35
Figure 15: Mitel 6739i XML display and keys.....	36
Figure 16: Mitel 9413i XML display and keys.....	37
Figure 17: Mitel 9413i XML display and keys.....	38
Figure 18: Mitel 6867i XML display and keys.....	39
Figure 19: Mitel 6869i XML display and keys.....	40
Figure 20: TextMenu Implementation on 6739i	43
Figure 21: “numbered” style TextMenu	50
Figure 22: “none” style TextMenu	50
Figure 23: “radio” style TextMenu	50
Figure 24: TextMenu Example 1 (non softkey phones).....	51
Figure 25: TextMenu Example 1 (softkey phone).....	52
Figure 26: TextMenu Example 1 (6739i)	52
Figure 27: TextMenu Example 2 (softkey phone).....	53
Figure 28: TextMenu Example 2 (6739i)	55
Figure 29: ImageMenu 6867i implementation (mode regular/extended)	57
Figure 30: ImageMenu 6867i implementation (fullscreen mode)	58
Figure 31: ImageMenu 6869i implementation (mode regular/extended)	59
Figure 32: ImageMenu 6869i implementation (fullscreen mode)	60
Figure 33: ImageMenu implementation (regular mode)	61
Figure 34: ImageMenu implementation (extended mode).....	61
Figure 35: ImageMenu implementation (fullscreen mode)	62
Figure 36: ImageMenu Example (55i/57i/57iCT/6735i/6737i)	67
Figure 37: ImageMenu Example (6739i)	67

Figure 38: TextScreen implementation on 6867i	69
Figure 39: TextScreen implementation on 6739i	70
Figure 40: TextScreen Example (non softkey phones)	75
Figure 41: TextScreen Example (softkey phones)	76
Figure 42: TextScreen Example (6739i)	76
Figure 43: TextScreen Example (6867i)	77
Figure 44: FormattedTextScreen layout	78
Figure 45: FormattedTextScreen layout on 6867i	80
Figure 46: FormattedTextScreen implementation on 6867i	81
Figure 47: FormattedTextScreen layout on 6739i	82
Figure 48: FormattedTextScreen implementation on 6739i	83
Figure 49: FormattedTextScreen Example 1 (non softkey phones)	89
Figure 50: FormattedTextScreen Example 2 (softkey phones)	90
Figure 51: FormattedTextScreen Example 3 (6739i)	91
Figure 52: FormattedTextScreen Example 4 (6739i)	92
Figure 53: ImageScreen 6867i implementation (mode regular/extended)	95
Figure 54: ImageScreen 6867i implementation (fullscreen mode)	95
Figure 55: ImageScreen 6739i implementation (normal mode)	96
Figure 56: ImageScreen 6739i implementation (extended mode)	97
Figure 57: ImageScreen 6739i implementation (fullscreen mode)	97
Figure 58: ImageScreen Example (55i/57i/57iCT/6735i/6737i)	102
Figure 59: ImageScreen Example (6739i)	103
Figure 60: InputScreen implementation on 6867i	105
Figure 61: InputScreen implementation on 6739i	106
Figure 62: InputScreen “IP” Example (non softkey phone)	112
Figure 63: InputScreen “IP” Example (softkey phone)	113
Figure 64: InputScreen “IP” Example (6739i)	113
Figure 65: InputScreen “Number” Example (non softkey phone)	114
Figure 66: InputScreen “Number” Example (softkey phone)	114
Figure 67: InputScreen “Number” Example (6739i)	115
Figure 68: InputScreen “String” Example (non softkey phone)	116
Figure 69: InputScreen “String” Example (softkey phone)	117
Figure 70: InputScreen “String” Example (6739i)	117
Figure 71: InputScreen “TimeUS” Example (<i>non softkey phone</i>)	118
Figure 72: InputScreen “TimeUS” Example (<i>softkey phone</i>)	119
Figure 73: InputScreen “TimeUS” Example (6739i)	119
Figure 74: InputScreen “Timelnt” Example (<i>non softkey phone</i>)	120
Figure 75: InputScreen “Timelnt” Example (<i>softkey phone</i>)	120
Figure 76: InputScreen “Timelnt” Example (6739i)	121
Figure 77: InputScreen “DateUS” Example (<i>non softkey phone</i>)	122

Figure 78: InputScreen “DateUS” Example (<i>softkey phone</i>)	122
Figure 79: InputScreen “DateUS” Example (6739i).....	123
Figure 80: InputScreen “DateInt” Example (<i>non softkey phone</i>)	124
Figure 81: InputScreen “DateInt” Example (<i>softkey phone</i>)	124
Figure 82: InputScreen “DateInt” Example.....	125
Figure 83: InputScreen implementation on 6867i mode “normal”	127
Figure 84: InputScreen implementation on 6867i mode “condensed”	127
Figure 85: InputScreen implementation on 6739i mode “normal”	128
Figure 86: InputScreen implementation on 6739i mode “condensed”	129
Figure 87: InputScreen multiple inputs “condensed” (55i/57i/57iCT/9480i/9480iCT/6735i/6737i)	138
Figure 88: InputScreen multiple inputs “condensed” (6739i).....	138
Figure 89: InputScreen multiple inputs “normal” ((55i/57i/57iCT/9480i/9480iCT/6735i/6737i)	139
Figure 90: InputScreen multiple inputs “normal” (6739i)	140
Figure 91: CallLog Implementation	141
Figure 92: PhoneCallLog Example.....	147
Figure 93: AastralPPhoneStatus implementation on the 6739i (no URI callback)	148
Figure 94: AastralPPhoneStatus implementation on the 6739i (with URI callback)	149
Figure 95: PhoneStatus Example (<i>non softkey phone</i>)	152
Figure 96: PhoneStatus Example (<i>softkey phone</i>)	152
Figure 97: PhoneStatus Example (6739i)	153
Figure 98: Mitel 6755i screen.....	169
Figure 99: Mitel 6757i/6757i CT screen	169
Figure 100: One cell icon	171
Figure 101: Two cell icon	171
Figure 102: HTTP flow for XML applications	237
Figure 103: Auto-configuration message flow	245
Figure 104: Self-configuration implementation architecture	246
<i>Figure 105: LDAP directory message flow.....</i>	323

1 INTRODUCTION

1.1 MITEL XML API

Mitel SIP phones support an XML API since firmware release 1.3.0. This XML API allows external applications to control the display of the phone as well as its configuration.

The list of potential XML applications is endless, see chapter 9 for some examples of potential XML applications.

This document details the XML objects supported by the Mitel SIP phones using firmware version 4.1.0 and how to implement them.

1.2 REVISION HISTORY

1.2.1 VERSION 4.1.0 (6863I / 6865I / 6867I / 6869I)

- Bug fixes

1.2.2 VERSION 4.0.0 SP2 (6863I / 6865I / 6867I / 6869I)

- Bug fixes

1.2.3 VERSION 4.0.0 SP1 (6863I / 6865I / 6867I / 6869I)

- New Dial tag added to XML objects AastralPPhoneTextScreen and for AastralPPhoneFormattedTextScreen to allow dialing from these object going off-hook or via the custom softkey Softkey::Dial2.
- LED control of the XML hardkeys via AastralPPhoneExecute.
- Alert status without timeout can now be removed sending an empty alarm using AastralPPhoneStatus
- New input type for AastralPPhoneInputScreen, “stringN” which behaves like a regular “string” input but the input starts with a number instead of a letter (toggle key starts with “123>” instead of “ABC>” on 67i/69i, pressing “2” on the keypad browses “2ABCabc” instead of “ABC2abc” on 63i/65i)
- 6867I/6869I only
 - Simulated LED control of the softkeys via AastralPPhoneExecute.
 - AastralPPhoneInputScreen, exiting the object with parameter values is no longer limited to the Softkey::Submit custom softkey. The parameter values and selection are now added to any URI custom softkey.
 - AastralPPhoneStatus now supports custom icons to be displayed on the idle screen status bar, similar to 6739I

1.2.4 VERSION 4.0.0 (6863I / 6865I / 6867I / 6869I)

- Support for 6869I

1.2.5 VERSION 3.3.1 SP4 (9143I / 9480I / 9480ICT / 6730I / 6731I / 6739I / 53I / 55I / 57I / 57ICT / 6863I / 6865I / 6867I)

- 6867I only
 - Icon support in TopTitle tag for UI XML objects
 - Color tag for AastralPPhoneStatus

1.2.6 VERSION 3.3.1 SP3 (9143I / 9480I / 9480ICT / 6730I / 6731I / 6739I / 53I / 55I / 57I / 57ICT / 6863I / 6865I / 6867I)

- Firmware not available for 6735I/6737I
- Added support for 6863I, 6865I and 6867I

- 1.2.7 VERSION 3.3.1 (9143I/9480I/9480ICT/6730I/6731I/6739I/53I/55I/57I/57ICT)
 - Firmware not available for 6735i/6737i
 - Wav.Repeat command removed.
 - New Melody.Play and Melody.Stop commands to repeatedly play a wav file.
- 1.2.8 VERSION 3.3.1 (9143I/9480I/9480ICT/6730I/6731I/6739I/53I/55I/57I/57ICT)
 - Firmware not available for 6735i/6737i
 - AastralIPPhoneConfiguration now allows locking/unlocking softkeys and programmable hardkeys using the “softkeyN locked: 0/1” parameter.
 - New wave file streaming command Wav.Repeat to repeat the wave streaming until it is stopped by a Wav.Stop command.
 - Volume control tag added to the wave streaming commands Wav.Play and Wav.Repeat.
- 1.2.9 VERSION 3.3.0 (9143I/9480I/9480ICT/6730I/6731I/6739I/53I/55I/57I/57ICT)
 - Firmware not available for 6735i/6737i
 - AastralIPPhoneConfiguration now supports range settings in order for instance to reset a list of softkeys in a single command.
 - New XML command to control all the softkey attached LEDs in a single command.
 - New GoodbyeLockinURI parameter attaching an action to the Goodbye key when displayed XML UI object is in LockedIn mode.
 - New phone variable \$\$ACTIVEPROXY\$\$ reflecting current active proxy and providing XML server redundancy information.
 - Mitel 6739i only
 - AastralIPPhoneStatus can be used to display icons on the top line
 - Custom icons can now be downloaded from the server as a png file
 - Label color in every UI object can now be configured
 - New Call log XML object to provide call logs or redial applications equivalent to the native 6739i UI.
 - New line wrapping control mechanism in AastralIPPhoneTextMenu items using the split tag
 - Top line title and icon can now be customized by the XML UI objects using TopTitle tag
 - AastralIPPhoneInputScreen now supports immediate edition mode using the defaultFocus tag
- 1.2.10 VERSION 3.2.2 (9143I/9480I/9480ICT/6730I/6731I/6735I/6737I/6739I/53I/55I/57I/57ICT)
 - Support for Mitel 6735i and Mitel 6737i SIP phones
- 1.2.11 VERSION 3.2.2 (9143I/9480I/9480ICT/6730I/6731I/6739I/53I/55I/57I/57ICT)
 - Some bug fixes, see firmware release notes for more details
 - Mitel 6739i only
 - Default softkey “Done” for all UI objects
 - Idle screen now supports a background picture.
- 1.2.12 VERSION 3.2.1 (9143I/9480I/9480ICT/6730I/6731I/6739I/53I/55I/57I/57ICT)
 - Mitel 6739i only
 - AastralIPPhoneImageScreen and AastralIPPhoneImageMenu now support jpeg images on top of png images

- AastralPPhoneImageScreen and AastralPPhoneImageMenu now support 3 image size
 - 380x340 pixels
 - 640x340 pixels
 - 640x480 pixels
- AastralPPhoneTextMenu now supports a new tag “unitScroll” to change the behavior of the scrolling and mimic the behavior of a 57i (the arrow keys move the selected item one by one)
- AastralPPhoneStatus now supports custom icons to be displayed along with the alert/message text and also an URI to be triggered when the user actually presses the message.
- AastralPPhoneInputScreen now supports the inputLanguage tag
- Wave file streaming commands now supported
- All phones
 - AastralPPhoneTextMenu now supports new tags “scrollUp” and “scrollDown” which are triggered when the scrolling reaches the top or the bottom of the menu items
 - Feedback on XML errors as well as ongoing operations is now provided to the user.

1.2.13 VERSION 3.2.0 (9143I/9480I/9480ICT/6730I/6731I/6739I/53I/55I/57I/57ICT)

- Mitel 6739i now supports
 - AastralPPhoneImageScreen loading a remote png file
 - AastralPPhoneImageMenu loading a remote png file
 - Custom XML menu under the “Services” key
 - Beep in the root tag
 - Icons for Textmenu items and custom softkeys
 - RTP streaming
 - Lock/Unlock and ClearCallersList commands
- LED control on expansion modules
- XML object AastralPPhoneDirectory no longer supported
- Mitel 6751i no longer supported
- Play Wav command command is supported on all phones but the 6739i.

1.2.14 VERSION 3.0.1 (6739I)

- Support for Keypress emulation but limited to hard keys.
- AastralPPhoneInputScreen now supports multiple input fields.
- AastralPPhoneFormattedTextScreen is now supported with 1 enhanced tag and 1 new tag to leverage the Mitel 6739i color display
- Size now supports “small” and “large” on top of “double”
- A Color tag is now supported
- AastralPPhoneStatus is now supported.
- Also the capability to override a ‘telephony’ key by an XML script is now supported using the following configuration parameters:
 - services script
 - callers list script
 - directory script

- redial script
- xfer script
- conf script
- icom script
- voicemail script
- options script
- UTF-8 encoding is now supported and is the default mode.

1.2.15 VERSION 3.0.0 (6739I)

- First version of the XML API SDK dedicated to the 6739i running firmware 3.0.0

1.2.16 VERSION 2.6.0 (9143I/9480I/9480ICT/6730I/6731I/51I/53I/55I/57I/57ICT)

- AastralIPPhoneInputScreen now supports up to 10 fields in normal mode.
- New action uri connected which is triggered when the phone enters in the “connected” state.
- New line parameter for the Dial tag in AastralIPPhoneTextMenu to indicate which SIP line to use when the dial command is performed
- New DialLine URI equivalent to the Dial command but adds the SIP line to use.
- New AastralIPPhoneExecute command “UploadSystemInfo” for crash file and configuration files retrieval

1.2.17 VERSION 2.5.3 (9143I/9480I/9480ICT/6730I/6731I/51I/53I/55I/57I/57ICT)

- New scrollConstrain tag for AastralIPPhoneTextMenu to control the wrap-around in the list. When enabled, scrolling down on the last entry of the list does not wrap to the first item.
- New numberLaunch tag for AastralIPPhoneTextMenu to allow a user to launch the following menu by typing its number on the keypad, of course it is limited to menu 1-9.
- New scrollUp, scrollDown, scrollLeft and scrollRight tags for
 - AastralIPPhoneTextScreen,
 - AastralIPPhoneFormattedTextScreen
 - AastralIPPhoneImageScreen

which allows an override of the navigation keys default behaviour.

- “Please Wait...” is now displayed instead of “Loading Page...” when the phone is waiting for an answer of the XML server.
- AastralIPPhoneExecute, when using a regular URI the command now supports phone variables.
- Localized input mapping has been modified to allow the input of the ‘+’ character by pressing ‘0’ twice.
- XML objects now properly support UTF-8 for the encoding and the charset.

1.2.18 VERSION 2.5.2 (9143I/9480I/9480ICT/6730I/6731I/51I/53I/55I/57I/57ICT)

- Documentation fixes.
- Object oriented php classes updates.
- Updated sample csv directory application allowing search by company.
- Updated media applications.

1.2.19 VERSION 2.4.1 (9143I/9480I/9480ICT/6730I/6731I/51I/53I/55I/57I/57ICT)

- Support for the new Mitel 6730i and 6731i SIP phones.

1.2.20 VERSION 2.4.0 (9143I/9480I/9480ICT/51I/53I/55I/57I/57I CT)

- New action uri onRegistrationEvent which is triggered each time the registration status of the phone changes.
- New setType tag for AastralPPhoneConfiguration which allows to set configuration parameter at a different precedence than just the server provided configuration.
- New contextual softkeys 'Drop', 'Conf' and 'Xfer' available in the connected state, these new softkeys are similar to the 'Answer' and 'Ignore' softkeys for incoming call state. For the non softkey phones, new 'allowDrop', 'allowXfer' and 'allowConf' have been added.
- action uri disconnected now triggered at the end of a wav file stream.

1.2.21 VERSION 2.3.1 (9143I/9480I/9480ICT/51I/53I/55I/57I/57I CT)

- New configuration parameter webapps uri to
 - Remove the WebApps option from the 51i, 53i, and 9143i Service Menus, and disable the WebApps key for all other phone models.
 - Specify a customized URI for the WebApps key instead of using the default URI of [http://xml.myaastra.com/?localip=\\$\\$LOCALIP\\$\\$](http://xml.myaastra.com/?localip=$$LOCALIP$$)

1.2.22 VERSION 2.3.0 (9143I/9480I/9480ICT/51I/53I/55I/57I/57I CT)

- New XML configuration
- The following telephony keys can now be assigned to call an XML script instead of the regular telephony feature:
 - Redial
 - Transfer
 - Conference
 - Intercom
 - VoiceMail
- Phone 'Options' Key can now be redirected to an XML script.
- On a normal key press of the options key the XML application set in the URI is displayed
- On a long key press the normal/local options menu is displayed
- New configuration auto offhook to prevent the phone from going into the offhook/dialing state when the handset is off hook and the call ends. This parameter is very useful for XML applications such as Visual Voicemail to stay in the application at the end of the message.
- New PhoneExecute commands
 - Play/stop a wav file hosted on a HTTP or TFTP server.
 - Simulate keypress on the phone
 - Reset local Callers list
 - Reset local Directory
 - Reset local Redial list
 - Delete the local configuration and reboot
- New attributes
 - New root tag attribute allowDTMF in some interactive UI objects to allow DTMF passthrough when the phone is in the connected mode.
 - AastralPPhoneTextScreen,
 - AastralPPhoneFormattedTextScreen,

- AastralIPPhoneImageScreen
- New action uri(s)
 - action uri disconnected is triggered when the phone transitions from any active (non idle) call state to idle.
- New URL variables
 - \$\$LOCALIP\$\$ Local IP address of the phone
 - \$\$CALLDURATION\$\$ Current/last Call duration
 - \$\$CALLDIRECTION\$\$ Current/last call direction
 - \$\$LINESTATE\$\$ Line state when the 'disconnect' event happens.
- Others
 - Custom SSL certificates for HTTPS can now be loaded on the phones.
 - Pre-programmed XML Service Key called WebApps pointing to an Mitel hosted service located at [http://xml.myaastra.com/?localip=\\$\\$LOCALIP\\$\\$](http://xml.myaastra.com/?localip=$$LOCALIP$$) that you can also access from your Web browser at www.myaastra.com
 - Enhancements/fixes
 - XML calls are now non-blocking for action uri and pushed XML objects
 - Action uri GET calls no longer display an error message if failure to load the page.
 - Unicast and Multicast mixed RTP streaming, the phone can now send ear+mouth and not just mouth or receive an RTP stream over an existing one.
 - HTTPS URI now supported in the AastralIPPhoneExecute object.

1.2.23 VERSION 2.2.1 (9143I/9480I/9480iCT/51I/53I/55I/57I/57I CT)

- Support of the 9143i, 9480i and 9480iCT SIP Phones

1.2.24 VERSION 2.2.0 (51I/53I/55I/57I/57I CT)

- New wrapList root tag for the AastralIPPhoneTextMenu object to display menu items on 2 lines.
- Number of items extended to 30 (instead of 15) for the AastralIPPhoneTextMenu object.
- Action uri polling with a customizable interval to have the phone call an XML URI on a regular basis
- SIP notify to trigger a XML GET, to have the phone making a XML call when an authorized SIP Notify is sent via the SIP proxy server.
- The XML browser is now available when the phone Web UI is disabled.
- Support of Unicast and Multicast RTP streaming triggered by an XML call.
- Improved error handling, the phone now displays the HTTP error message when available instead of "Cannot display".
- XML GET are now non blocking, the phone keeps processing events when waiting for an answer to an HTTP GET.

1.2.25 VERSION 2.1.1 (51I/53I/55I/57I/57I CT)

- Support for the new 51i SIP Phone
- Lock and Unlock command for the AastralIPPhoneExecute object to lock or unlock the phone.
- inputLanguage root tag for the AastralIPPhoneInputScreen XML object. This tag allows access to language localized input characters.
- New configuration parameter xml lock override added in order to allow a XML Push when the phone is locked.

1.2.26 VERSION 2.1.0 (53I/55I/57I/57I CT)

- doneAction root tag for the AastralIPPhoneTextScreen and AastralIPPhoneFormattedTextScreen XML objects. This tag allows redirecting the user to a specified URI after a “Done” key press; this can be very useful for non softkey phones such as the Mitel 53i.
- New custom softkeys “Ignore” and “Answer” and “allowAnswer” tag to answer a call when an XML page is called upon the incoming call.
- New custom softkey (List) for the AastralIPPhoneInputScreen to enter a list of configured symbols. This new softkey allows for instance an easy email address input using the “@.” List of symbols.
- New configuration parameter xml get timeout added in order to control the server answer delay.
- New configuration parameters services script, directory script and callers list script to override internal applications and link the features to an XML script.

1.2.27 VERSION 2.0.2 (53I/55I/57I/57I CT)

- New command “FastReboot” for the PhoneExecute object to trigger a fast reboot of the phone (no firmware check and limited language package check).
- New universal URI type “Led:” support to control the LED state of the phone keys when they are typed as XML.
- Extension of the AastralIPPhoneInputScreen XML object to support multiple input fields (55i/57i and 57i CT only)

1.2.28 VERSION 2.0.1 (53I/55I/57I/57I CT)

- New XML objects
 - AastralIPPhoneConfiguration
 - AastralIPPhoneImageScreen (55i/57i/57i CT)
 - AastralIPPhoneImageMenu (55i/57i/57i CT)
 - AastralIPPhoneFormattedScreen
- Other
 - HTTPS support for XML calls.
 - Custom port support for http(s) XML calls
 - “Dial:XXXX” universal URI support
 - New “style” root tag for AastralIPPhoneTextMenu
 - Optional “Title” tag for all UI objects
 - “Title” wrapped on 2 lines (“wrap” tag).
 - Cancel remap for all UI XML objects
 - Timeout attribute common to all UI XML objects
 - LockIn attribute common to all UI XML objects
 - triggerDestroyOnExit root tag for non UI objects
 - Icons in AastralIPPhoneTextMenu (55i/57i/57i CT)
 - Icons in customizable softkeys (55i/57i/57i CT)
 - New HTTP header to indicate the presence of expansion modules
 - New input types for AastralIPPhoneInputScreen
 - timeUS, timelnt
 - dateUS, dateInt

1.2.29 VERSION 1.4.2 (9112i/9133i/480i/480i CT)

- New attributes
- New “style” tag for AastralIPPhoneTextMenu

1.2.30 VERSION 1.4.1 (9112i/9133i/480i/480i CT)

- New XML objects
 - AastralIPPhoneStatus
 - AastralIPPhoneExecute
- Action URIs
 - End of the boot sequence action uri startup
 - Successful registration action uri registered
 - On-hook action uri onhook
 - Off-hook action uri offhook
 - Incoming call action uri incoming
 - Outgoing call action uri outgoing
- URI System variables
 - \$\$SIPUSERNAME\$\$ line user name
 - \$\$DISPLAYNAME\$\$ the display name of the focused line
 - \$\$SIPAUTHNAME\$\$ the SIP auth name of the focused line
 - \$\$PROXYURL\$\$ the SIP proxy of the focused line
 - \$\$INCOMINGNAME\$\$ returns the Caller-ID of the incoming call
 - \$\$REMOTENUMBER\$\$ returns the number of the remote
- Other
 - No more need of URL encoding for pushed pages
 - Beep attribute common to all XML objects

1.2.31 VERSION 1.3.1 (9112i/9133i/480i/480i CT)

- Customizable softkeys (480i/480i CT)
 - Select
 - Exit
 - Dial
 - Submit
 - BackSpace
 - NextSpace
 - Dot
 - ChangeMode
- Other
 - XML softkeys (480i/480i CT)
 - XML programmable keys (9112i/9133i)
 - destroyOnExit attribute common to all XML objects

1.2.32 VERSION 1.3.0 (9112I/9133I/480I/480I CT)

- Fist revision of this document
- New XML objects
 - AastralPPhoneTextScreen
 - AastralPPhoneTextMenu
 - AastralPPhoneInputScreen
 - AastralPPhoneDirectory (480i/480i CT)

2 XML AND THE MITEL IP PHONES

2.1 WHAT IS XML?

XML stands for **eXtensible Markup Language**. It is a markup language much like HTML. HTML was designed to display data and to focus on how data looks. XML was designed to describe data and to focus on what data is.

The following are characteristics of XML:

- XML tags are not predefined. You must define your own tags
- XML uses a Document Type Definition (DTD) or an XML Schema to describe the data
- XML with a DTD or XML Schema is designed to be self-descriptive
- XML is a W3C Standard Recommendation

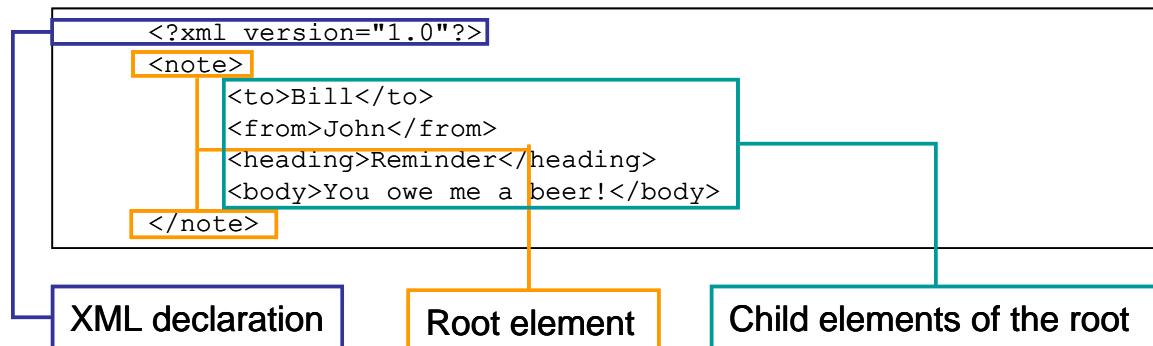


Figure 1: Basic XML document

More information available at <http://www.xml.com>

2.2 FUNCTIONALITY

The XML browser in Mitel IP phones allows developers to create custom services that they can use via the phone's keypad and display. These services include things like weather and traffic reports, contact information, company info, stock quotes, or custom call scripts.

With firmware release 4.1.0, the Mitel 6739i XML API supports 5 proprietary objects that allow the creation of powerful XML applications.

There are 2 types of XML objects:

- UI objects, XML objects which will use the display of the phone when they are received.
- Non UI objects, XML objects which have no direct impact on the current display.

The supported objects are:

- TextMenu object (UI)
- TextScreen object (UI)
- FormattedTextScreen (UI)
- InputScreen object (UI)
- ImageScreen (UI)
- ImageMenu (UI)
- Execute object
- Configuration object
- Status object

Some of these objects also support customizable softkeys that are declared as an independent object.

The following sections describe the process of creating XML objects for the Mitel SIP phones.

2.3 HOW DOES IT WORK?

Leveraging on the IP infrastructure, Mitel has decided to develop the browser capability on the phone using the HTTP transport protocol but as a direct support of HTML would not be suitable for the phone horsepower and limited display, the choice has been made to support only XML objects in the browser.

The Mitel SIP phones support two types of applications:

- Phone-initiated
- Server-initiated

2.3.1 PHONE INITIATED APPLICATION

The phone issues an HTTP (or HTTPS) GET command to the Web server, waits for the answer, decodes and displays this answer as any Web browser such as Microsoft Internet Explorer or Firefox would do as a Web client.

This can be done through a phone custom softkey and from the list of custom features (see chapter 7 for more details).

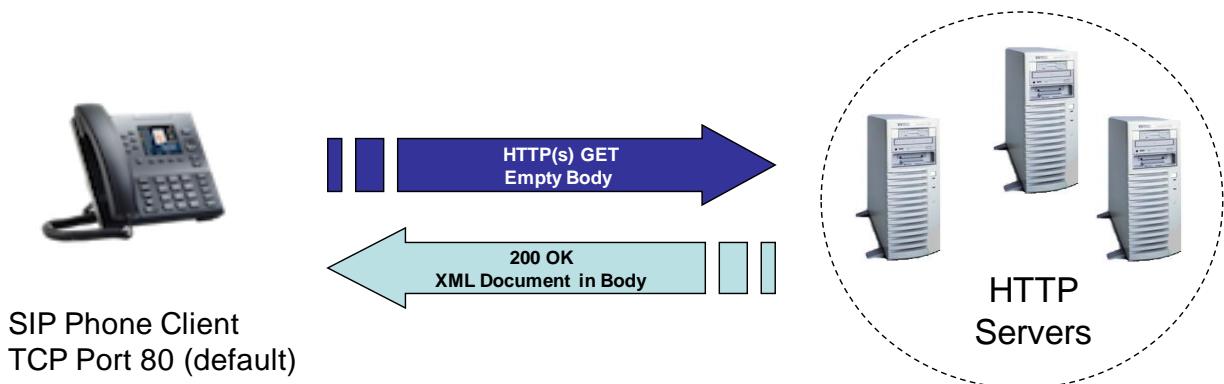


Figure 2: Mitel IP Phone acting as a client

When the phone performs an HTTP GET, it is a non blocking operation (phone will keep processing other events) as long as the GET is not requested by an action uri.

2.3.2 SERVER INITIATED APPLICATION

The other type of application would be more used for alerting as an application is pushing an XML object to the phone. The phone is now acting as a limited Web Server.

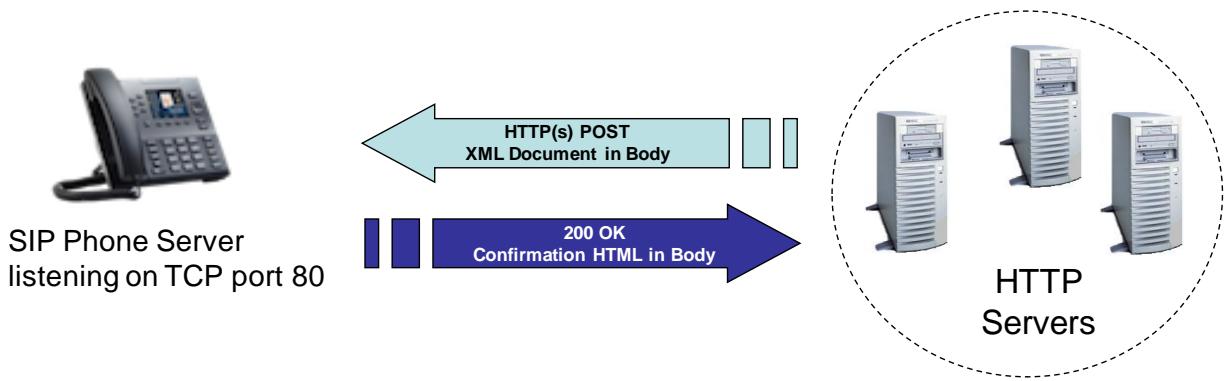


Figure 3: Mitel IP Phone acting as a server

2.4 SYSTEM ARCHITECTURE

The XML applications are hosted by one or multiple Web servers which will serve as a proxy to either other applications or to Internet Web servers.

2.4.1 CORPORATE APPLICATIONS

The following figure details the architecture to allow Mitel IP Phones to access an internal application. The application hosted by the Web server translates the phone requests to a protocol specific to the target application and formats the answer as an XML object to be displayed on the phone.

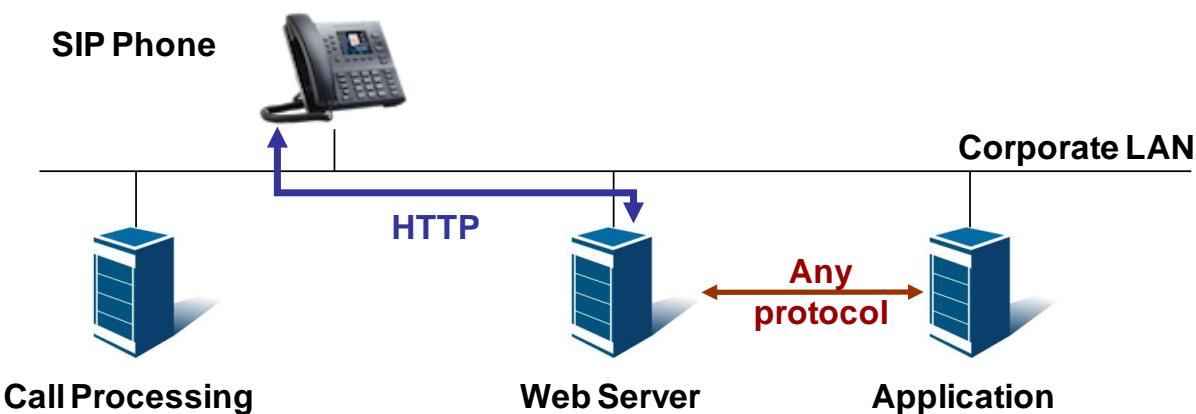


Figure 4: Access to an internal application

The following figure details the architecture of an XML application that would retrieve data from the internet such as a real-time stock-quote service.

 **Note:** for certain Web applications that are not real time, the Internet content can be cached on the XML web server for a faster access.

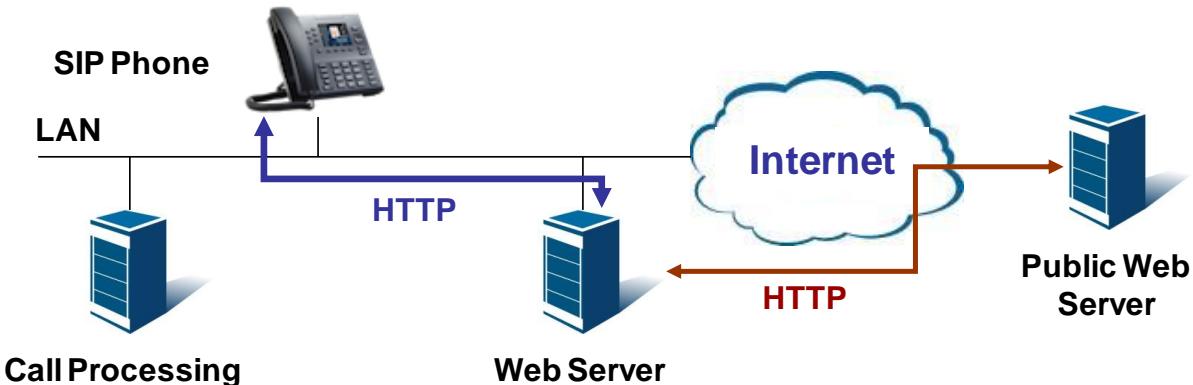


Figure 5: Access to an Internet application

2.4.2 TELEPHONY APPLICATIONS

The following figure details the architecture of an XML application that would provide more telephony features at the phone level.

The application could for instance

- show the list of the parked calls and perform a pick-up,

- activate the Call forward or the DND on the server side
- control a conference from the phone
- login/logout from a call center, access to the voice mail messages
- ...

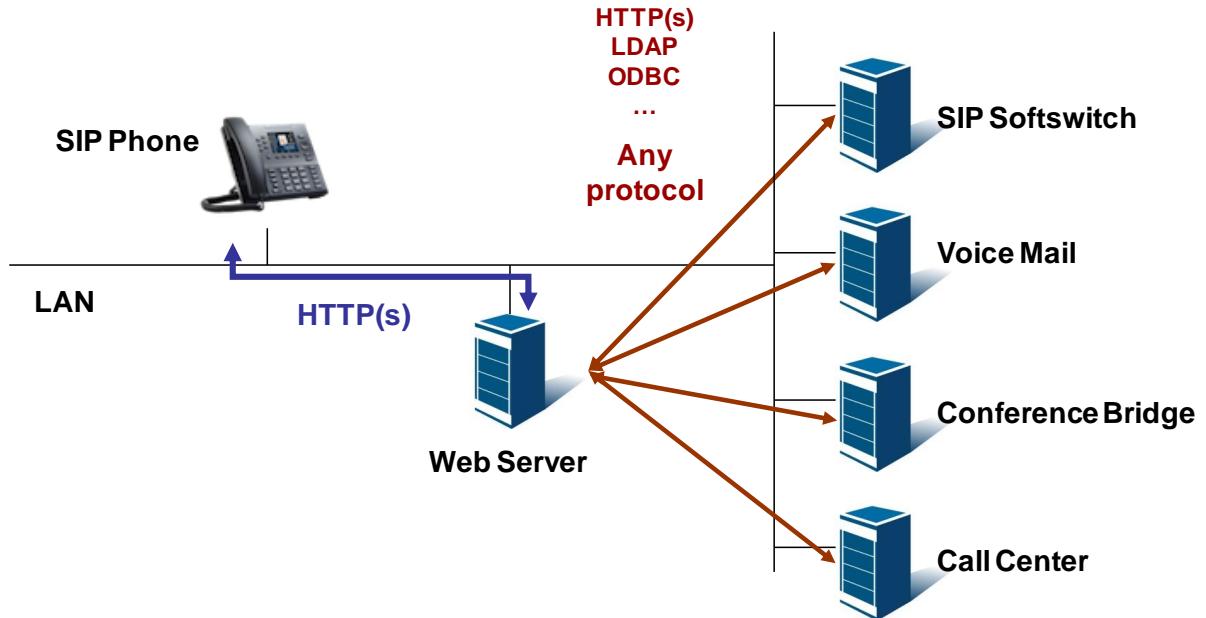


Figure 6: Access to a telephony application

2.5 DEVELOPMENT ENVIRONMENT

2.5.1 TYPICAL SOFTWARE ARCHITECTURE

The following diagram details the typical architecture of an XML application.

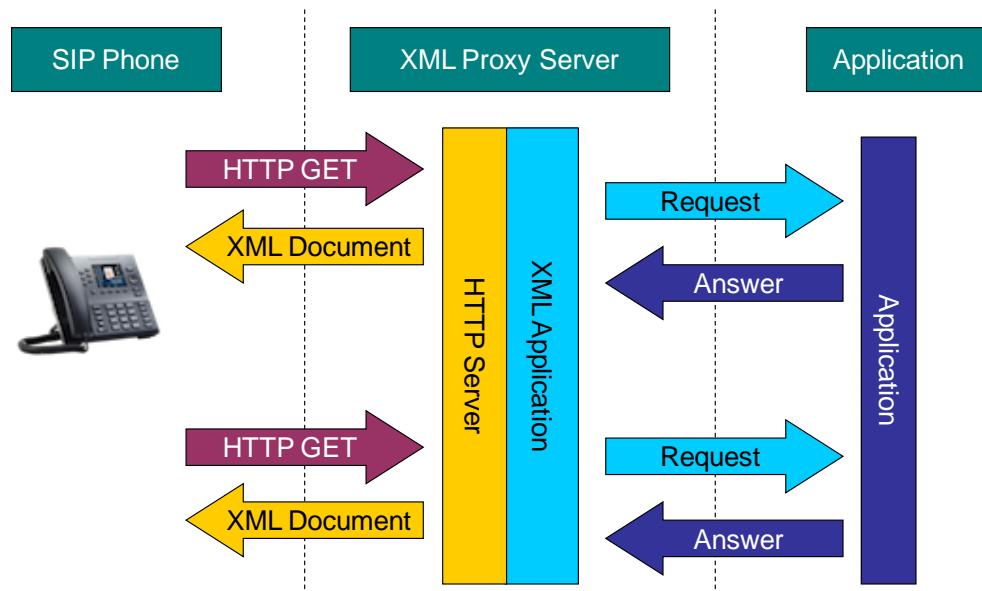


Figure 7: Typical software architecture of an XML application

The XML application is in fact translating requests from the phone to the protocol used by the external application and formats the answer into an XML document that the Mitel SIP phone can interpret.

2.5.2 WEB SERVER

There is no constraint in the choice of the Web Server software to be used for Mitel XML applications; the choice is more based on the tools needed for the development such as the script language, the corporate policy or even the cost of the platform.

The most common Web server applications supported are:

- Apache (<http://www.apache.org>) for Microsoft and Linux Operating systems
- Microsoft IIS for Microsoft Operating systems
- ...

2.5.3 SCRIPTS/LANGUAGES

As for the Web Server, there is no specific constraint on the tools to develop the applications. All the languages supported to develop a Web application are supported to develop XML applications. The most common are:

- Compiled languages: C, C++, C#...
- Scripting languages: VBscript, Perl, Python, PHP, asp...

2.5.4 XML VALIDATION TOOLS

A large number of tools are available to validate the XML document you will be sending to the phone, these tools use the XSD schema (provided at chapter 11) to check the syntax of the generated XML document.

Example of a Web based tool

- <http://tools.decisionsoft.com/schemaValidate/>

2.6 XML FORMAT

The text in the Mitel XML objects must be compliant with XML recommendations and special characters must be escape encoded:

Character	Name	Escape Sequence
&	Ampersand	&
"	Quote	"
'	Apostrophe	'
<	Left angle bracket	<
>	Right angle bracket	>

Figure 8: XML conversion table

To respect XML recommendations, the following header can be set at the beginning of the XML document,

```
<?xml version="1.0" encoding="ISO-8859-1"?>
```

Or

```
<?xml version="1.0" encoding="UTF-8"?>
```

By default UTF-8 is used by the phone.

2.7 HTTP FORMAT

The HTTP message sent to the Mitel SIP Phone must respect HTTP/1.1 and must include the following parameters in the header:

- Content-Length
- Content-Type

The other parameters of the HTTP header are optional such as charset.

Example

```
HTTP/1.1 200 OK
Date: Tue, 15 May 2007 14:24:33 GMT
Server: Apache/2.0.52 (CentOS)
X-Powered-By: PHP/4.3.11
Content-Length: 564
Connection: close
Content-type: text/xml; charset=ISO-8859-1

<?xml version="1.0" encoding="ISO-8859-1"?>
<AastraIPPhoneInputScreen type="string">
<Title>Title</Title>
<Prompt>Enter value</Prompt>
<URL>http://myserver.com/script.php</URL>
<Parameter>value</Parameter>
<Default></Default>
</AastraIPPhoneInputScreen>
```

2.8 XML DISPLAY CONTROL AND KEYS

This chapter describes the available part of the display for each Mitel SIP phones as well as the keys that are controlled by the XML objects.

2.8.1 MITEL 6730i/6731i

The display and keys available for XML applications on an Mitel 6730i/6731i are:

- 3 lines of 16 characters for the display
- the left and right arrow navigation keys
- the up and down rocker navigation key

The 3rd line of the display is a command line and will be used to display the labels of the available actions. See chapter 3 for more details on how each XML object will use this line of command.

Depending on the XML object displayed on the phone,

- the left arrow navigation key can also be interpreted as a “cancel” key,
- the right arrow navigation key can also be interpreted as a “next” key,
- the “Delete” key is used as a “Backspace” for the AastralPPhoneInputScreen object.

See chapter 3 for more detailed information on each object.

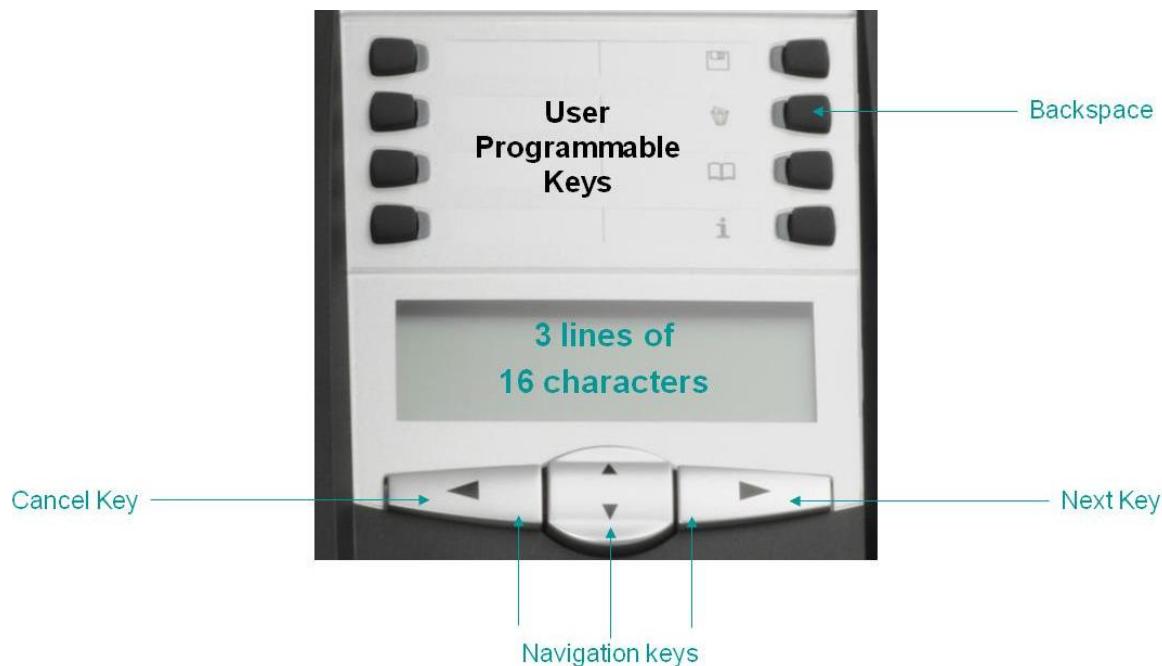


Figure 9: Mitel 6731i XML display and keys

2.8.2 MITEL 6753i

The display and keys available for XML applications on a Mitel 6753i are:

- 3 lines of 16 characters for the display
- the left and right arrow navigation keys
- the up and down rocker navigation key

The 3rd line of the display is a command line and will be used to display the labels of the available actions. See chapter 3 for more details on how each XML object will use this line of command.

Depending on the XML object displayed on the phone,

- the left arrow navigation key can also be interpreted as a “cancel” key,
- the right arrow navigation key can also be interpreted as a “next” key,
- the “Delete” key (second programmable key by default) is used as a “Backspace” for the AastralPPhoneInputScreen object.

See chapter 3 for more detailed information on each object.

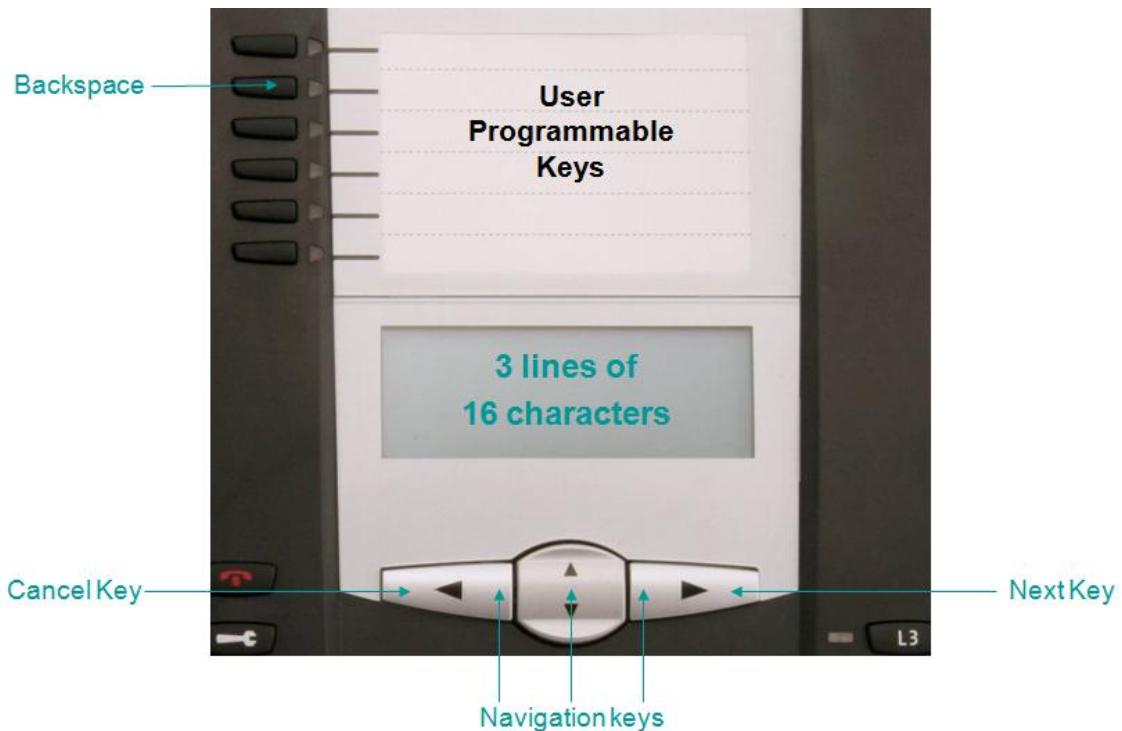


Figure 10: Mitel 6753i XML display and keys

2.8.3 MITEL 6755I/6735I

The display and keys available for XML applications on a Mitel 6755i and Mitel 6735i are:

- 5 lines of 22 characters for the display
- the left and right arrow navigation keys
- the up and down rocker navigation key
- 6 softkeys

Depending on the XML object displayed on the phone,

- the left arrow navigation key can also be interpreted as a “cancel” key,
- the right arrow navigation key can also be interpreted as a “next” key,

See chapter 3 for more detailed information on each object.

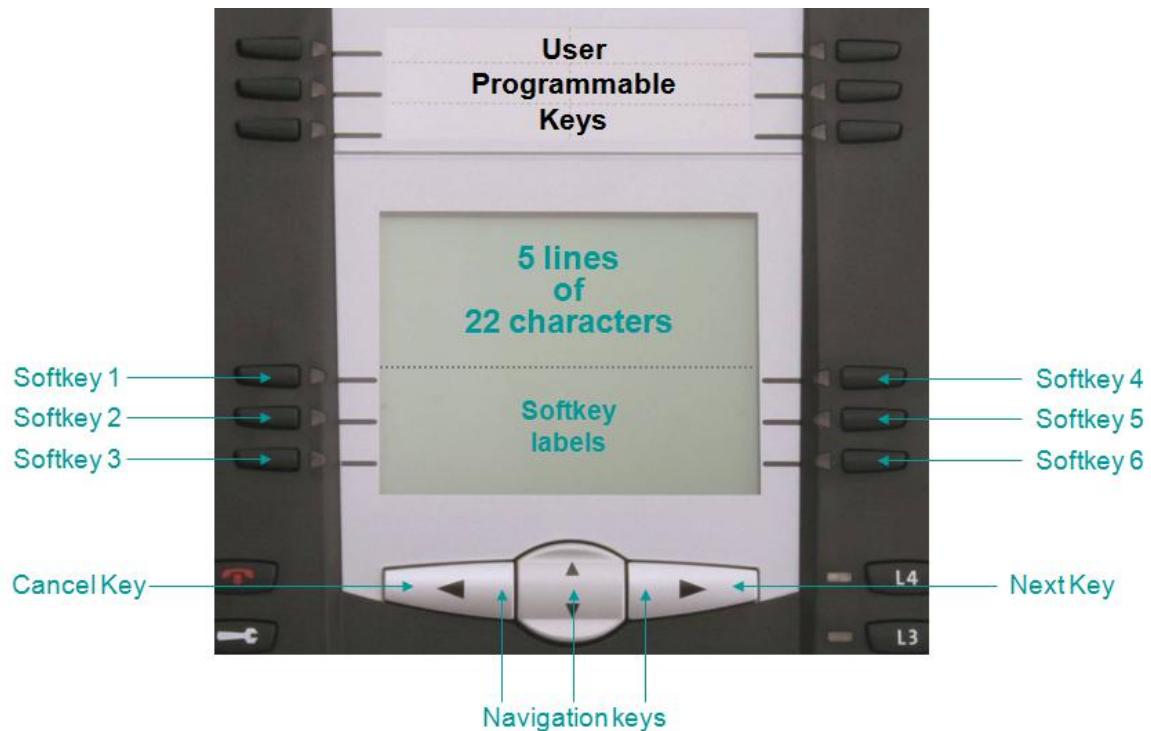


Figure 11: Mitel 6755i/6735i XML display and keys

2.8.4 MITEL 6757i/6757iCT/6737i

The display and keys available for XML applications on an Mitel 6757i/6757iCT/6737i are:

- 6 lines of 22 characters for the display
- the left and right arrow navigation keys
- the up and down rocker navigation key
- 6 softkeys

Depending on the XML object displayed on the phone,

- the left arrow navigation key can also be interpreted as a “cancel” key,
- the right arrow navigation key can also be interpreted as a “next” key,

See chapter 3 for more detailed information on each object.

→ Note: the top 3 lines of the display are not available for XML applications; they are dedicated to the labels of the top softkeys.

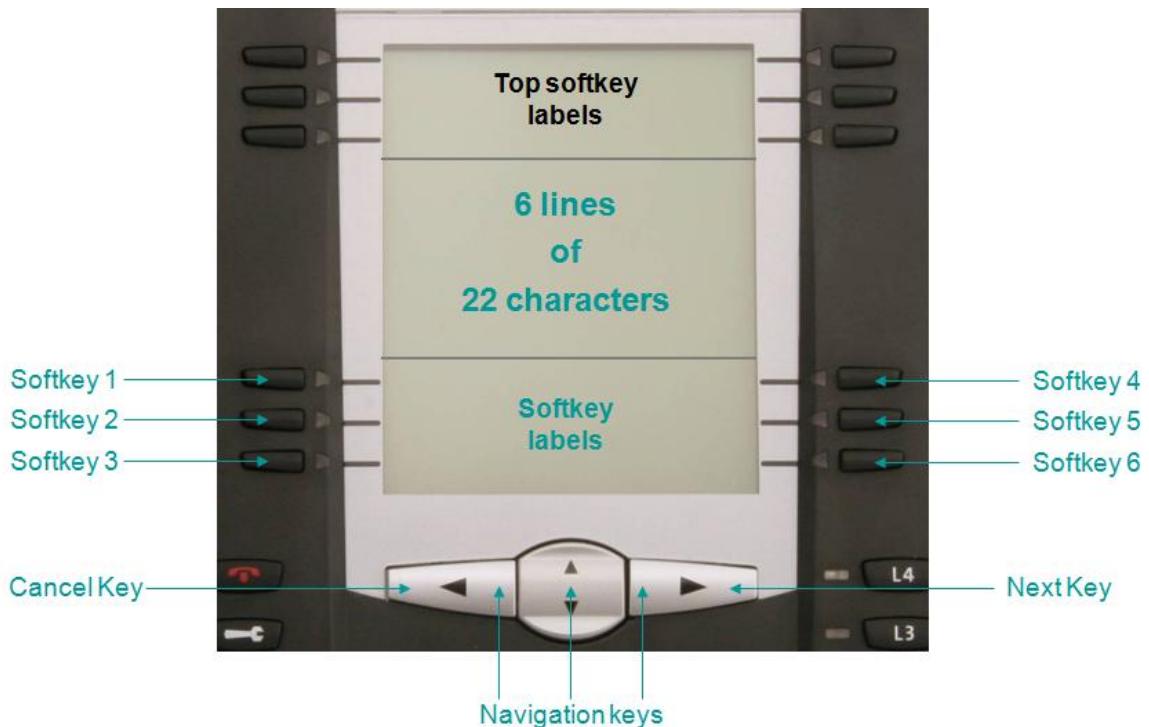


Figure 12: Mitel 6757i/6757iCT/6737i XML display and keys

2.8.5 MITEL 9143I

The display and keys available for XML applications on an Mitel 9143i are:

- 3 lines of 16 characters for the display
- the left and right arrow navigation keys
- the up and down arrow navigation keys

The 3rd line of the display is a command line and will be used to display the labels of the available actions. See chapter 3 for more details on how each XML object will use this line of command.

Depending on the XML object displayed on the phone,

- the left arrow navigation key can also be interpreted as a “cancel” key,
- the right arrow navigation key can also be interpreted as a “next” key,
- the “Delete” key is used as a “Backspace” for the AastralPPhoneInputScreen object.

See chapter 3 for more detailed information on each object.



Figure 13: Mitel 9413i XML display and keys

2.8.6 MITEL 9480i/9480iCT

The display and keys available for XML applications on an Mitel 9480i/9480iCT are:

- 5 lines of 21 characters for the display
- the left and right arrow navigation keys
- the up and down arrow navigation keys
- 6 softkeys

Depending on the XML object displayed on the phone,

- the left arrow navigation key can also be interpreted as a “cancel” key,
- the right arrow navigation key can also be interpreted as a “next” key,

See chapter 3 for more detailed information on each object.

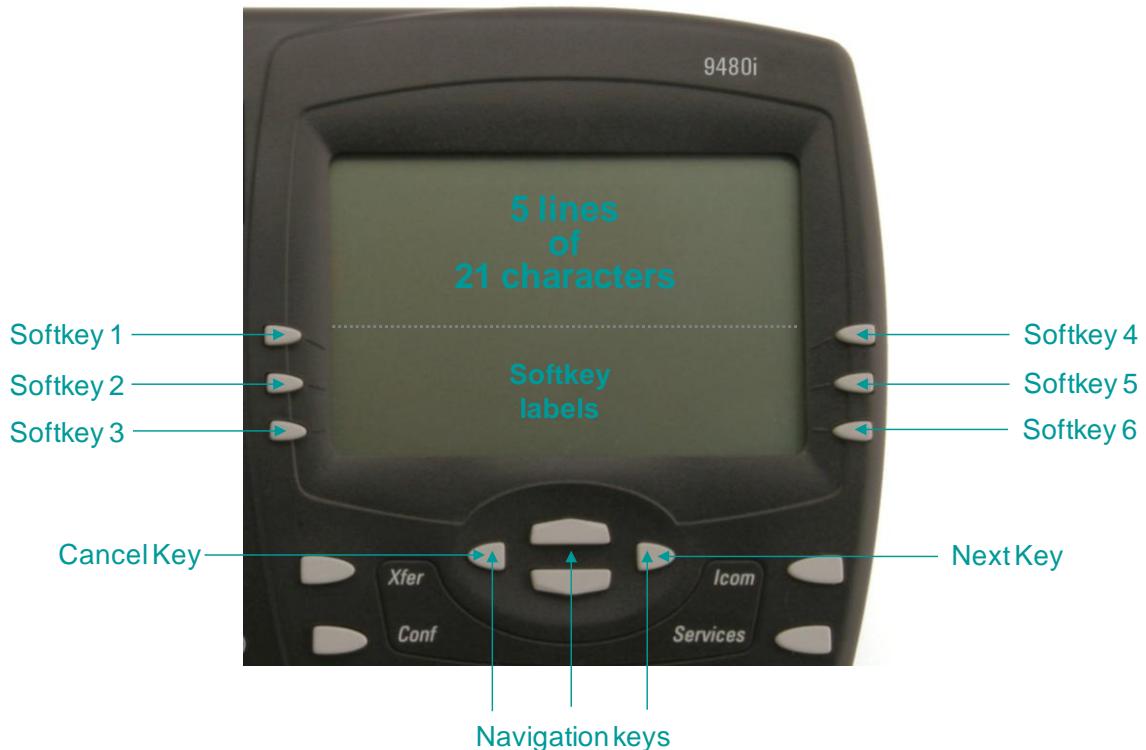


Figure 14: Mitel 9480i/9480iCT XML display and keys

2.8.7 MITEL 6739i

The display and keys available for XML applications on a Mitel 6739i are:

- 10 softkeys
- A graphical zone for the XML objects
- A Cancel/Back key
- Scroll Up/Down keys

See chapter 3 for more detailed information on each XML object.

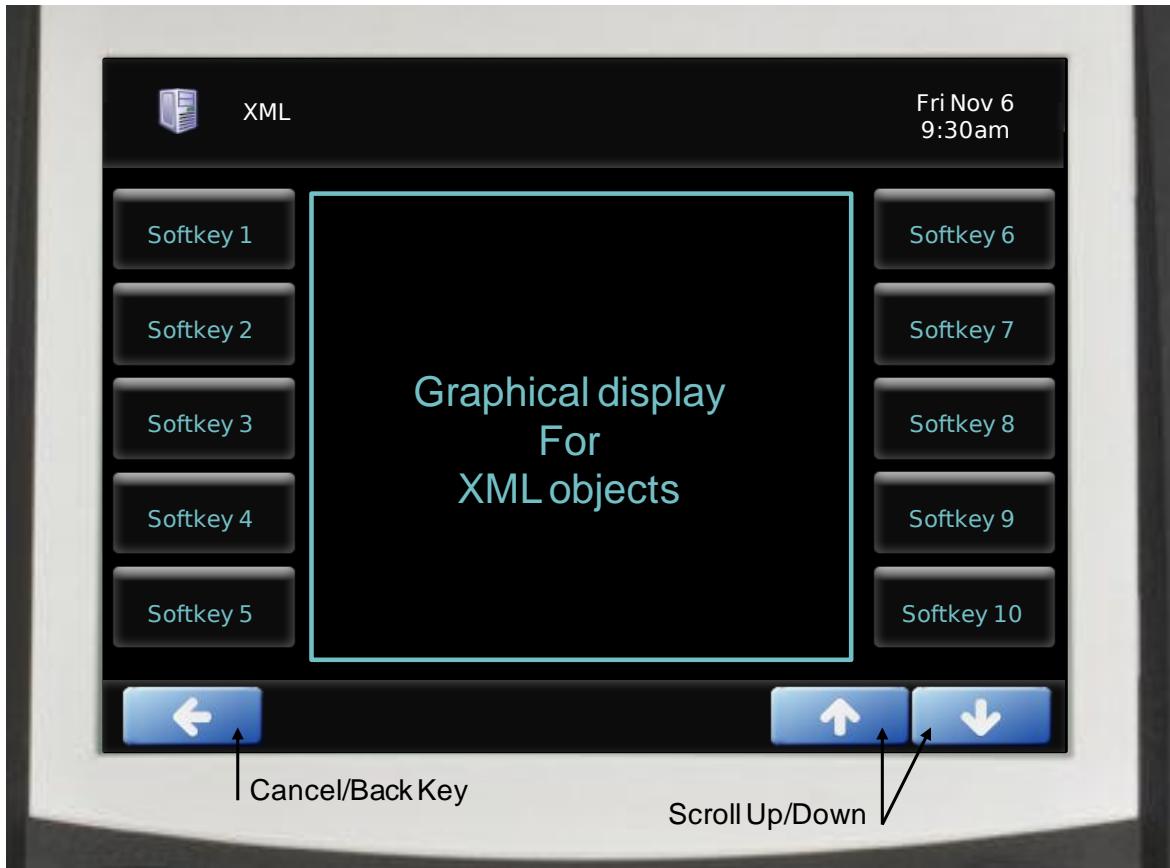


Figure 15: Mitel 6739i XML display and keys

2.8.8 MITEL 6863I

The display and keys available for XML applications on a Mitel 6863i are:

- 3 lines of 16 characters for the display
- the left and right arrow navigation keys
- the up and down arrow navigation keys

The 3rd line of the display is a command line and will be used to display the labels of the available actions. See chapter 3 for more details on how each XML object will use this line of command.

Depending on the XML object displayed on the phone,

- the left arrow navigation key can also be interpreted as a “cancel” key,
- the right arrow navigation key can also be interpreted as a “next” key,
- the “Delete” key is used as a “Backspace” for the AastralPPhoneInputScreen object.

See chapter 3 for more detailed information on each object.



Figure 16: Mitel 9143i XML display and keys

2.8.9 MITEL 6865i

The display and keys available for XML applications on an Mitel 6865i are:

- lines of 16 characters for the display
- the left and right arrow navigation keys
- the up and down arrow navigation keys

The 3rd line of the display is a command line and will be used to display the labels of the available actions. See chapter 3 for more details on how each XML object will use this line of command.

Depending on the XML object displayed on the phone,

- the left arrow navigation key can also be interpreted as a “cancel” key,
- the right arrow navigation key can also be interpreted as a “next” key,
- the “Delete” key is used as a “Backspace” for the AastralPPhoneInputScreen object.

See chapter 3 for more detailed information on each object.



Figure 17: Mitel 9413i XML display and keys

2.8.10 MITEL 6867I

The display and keys available for XML applications on a Mitel 6867i are:

- 4 softkeys (6 logical softkeys for XML applications)
- A graphical zone for the XML objects
- Left/Right arrow navigation keys
- Up/Down arrow navigation keys
- Select key

See chapter 3 for more detailed information on each XML object.



Figure 18: Mitel 6867i XML display and keys

2.8.11 MITEL 6869i

The display and keys available for XML applications on an Mitel 6869i are:

- 5 softkeys (8 logical softkeys for XML applications)
- A graphical zone for the XML objects
- Left/Right arrow navigation keys
- Up/Down arrow navigation keys
- Select key

See chapter 3 for more detailed information on each XML object.

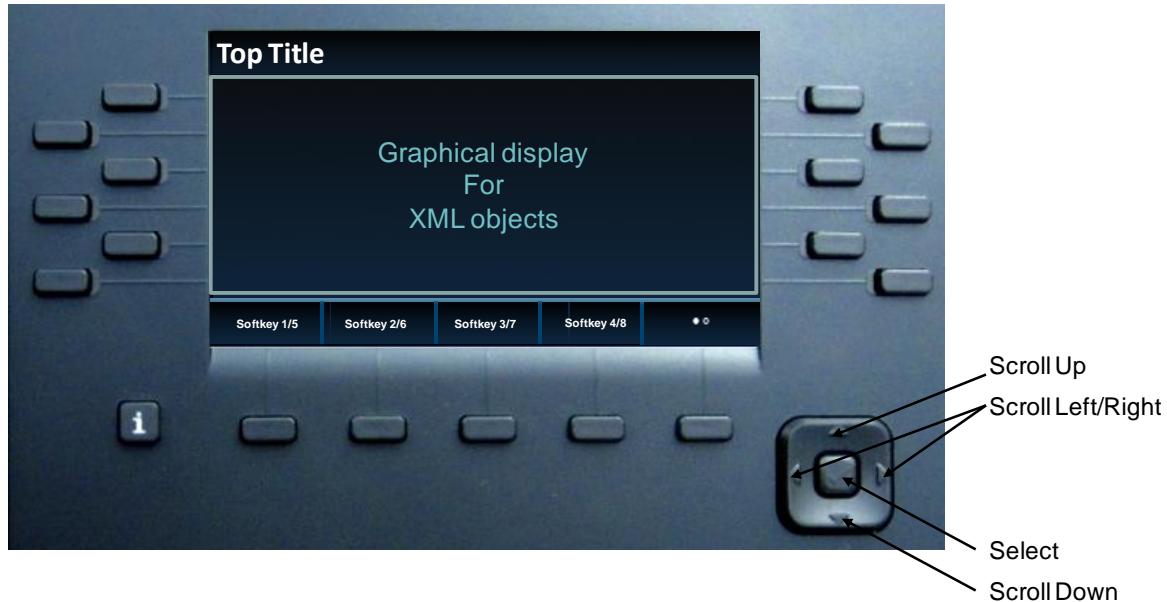


Figure 19: Mitel 6869i XML display and keys

3 MITEL IP PHONE XML OBJECTS

This chapter details all the XML objects supported by the Mitel SIP phones

In this chapter:

Non softkey phones are Mitel phones without softkey:

- Mitel 6730i/6731i
- Mitel 9143i
- Mitel 6753i a.k.a 53i
- Mitel 6863i/6865i

Softkey phones are Mitel phones with softkeys:

- Mitel 9480i/9480iCT
- Mitel 6755i a.k.a 55i and 6735i
- Mitel 6757i/6757iCT a.k.a 57i/57iCT and 6737i
- Mitel 6867i/6869i (graphical screen)

Touchscreen phones are Mitel phone(s) with a color graphical touch screen

- Mitel 6739i

Notes:



- the size of an XML object can not exceed 10000 bytes (10 kb).
- per XML specifications, only one XML object is supported in the XML document sent to the phone.

3.1 TEXTMENU OBJECT (ALL MODELS)

The `TextMenu` object allows developers to create a list of menu items on the IP phones. Go-to line support, arrow indicator, and scroll key support are built into these objects, along with the “**Select**” and “**Done**” softkeys for the phones supporting softkeys. The `TextMenu` object allows users to navigate the application, by linking HTTP requests to menu items.

For more details on the `TextMenu` behavior using the `Selection` tag or the `Dial` tag, please refer to section 4.13 and 4.14.

3.1.1 IMPLEMENTATION (SOFTKEY AND NON SOFTKEY PHONES)

Object native interaction

- **Select** Executes the content of the URI field assigned to the selected `MenuItem`
- **Exit** Redisplays the previous XML object present in the phone browser.

Non softkey phone keys

The object is displayed on one line or one item at a time. The Up and Down arrow keys allow the user to browse the list up and down.

Line Selected	Label	Keys	
Title	Use ^v to view	Up and Down Arrow	Browse up or down
		Left Arrow	Exit
Item	vNext	Up and Down Arrow	Browse up or down
	>Enter	Right Arrow	Select
		Left Arrow	Exit

Softkey phone keys

The object is displayed on up to 6 lines, the title stays on the top of the display. The Up and Down arrow keys allow the user to browse the list up and down.

Line selected	Keys
Item	Up and Down Arrow
	Right Arrow
	Left Arrow

Notes:



- the Left Arrow key interaction is disabled if the `LockIn` tag is set to "yes".
- the Left Arrow key interaction can be modified using the `cancelAction` tag.
- If the `LockIn` tag is set to "yes" and the `cancelAction` tag is configured, pressing the Left Arrow key triggers the configured `cancelAction`.

Object default Softkeys (softkey phones)

Position	Label	Interaction	URIs
1	Select	Select: Executes the content of the URI field assigned to the selected MenuItem;	SoftKey:Select
6	Done	Exit: Redisplays the previous XML object present in the phone browser.	SoftKey:Exit

3.1.2 IMPLEMENTATION (6739I)

The title is displayed at the top of the XML area and uses up to 2 lines. The menu items are displayed after the title area and up to 4 items can be displayed at a time.

The key is mapped to the `cancelAction` tag, if not specified the XML object is destroyed.

The keys allow up and down scrolling in order to display the complete list of items. When scrolling, the title area remains static.



Note: the key interaction is disabled if the `LockIn` tag is set to "yes".

The item prompts are automatically wrapped on 2 lines if needed.

The green line around the button indicates that the item is selected.

The  icon located on the right side of each item is the “Select” key and triggers the default URI of the object.

The  icon located on the right side of an item is displayed only if the `Dial` tag is configured for the item.

Object default Softkeys

Ten customizable softkeys are available for this object.

Position	Label	Interaction	URIs
10	Done	Exit: Redisplays the previous XML object present in the phone browser.	SoftKey:Exit

The following figure details how the `AastraIPPhoneTextMenu` is implemented on the Mitel 6739i.

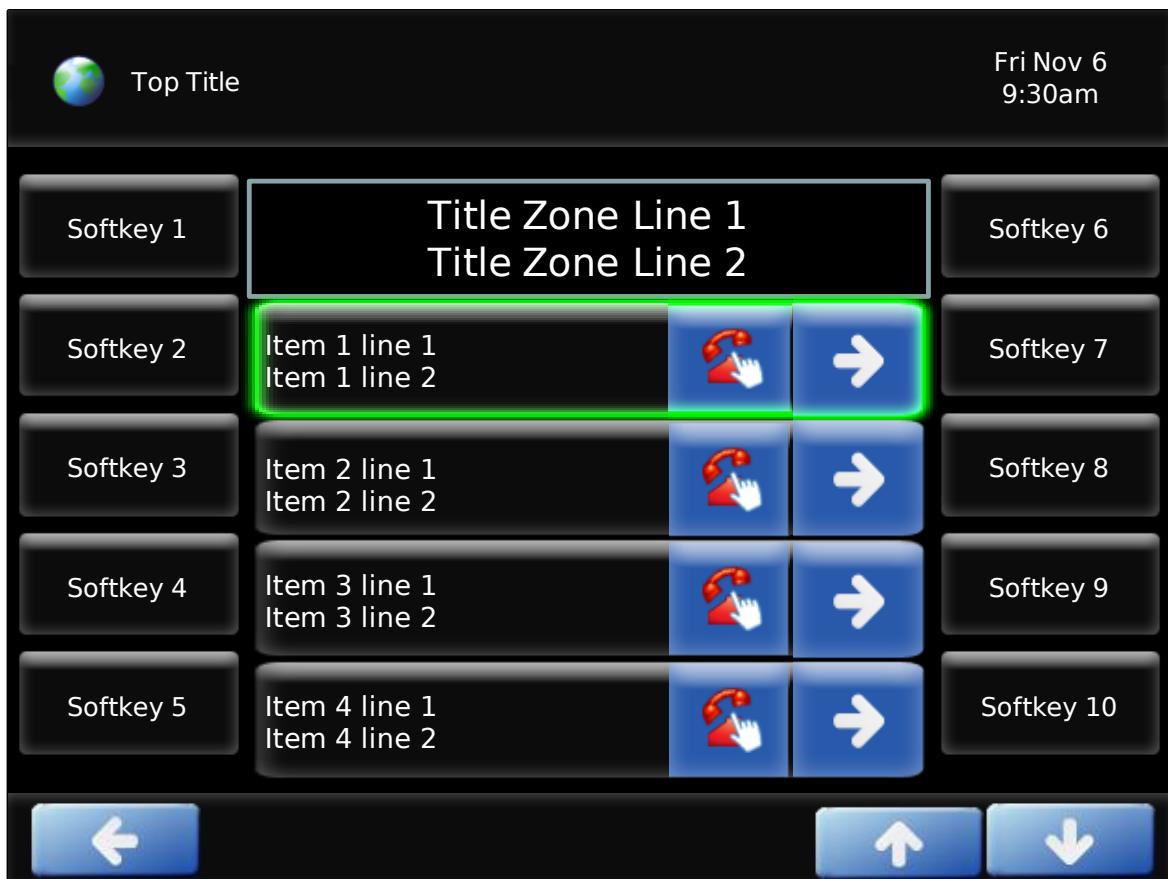


Figure 20: TextMenu Implementation on 6739i

3.1.3 XML DESCRIPTION

“Red” tags indicates that the tag does not apply to all phones, when not supported the tags are just ignored.

```

<AastraIPPhoneTextMenu
    defaultIndex = "some integer"
    destroyOnExit = "yes/no"
    style = "numbered/none/radio"
    Beep = "yes/no"
    Timeout = "some integer"
    LockIn = "yes/no"
    GoodbyeLockInURI = "some URI"
    allowAnswer = "yes/no"
    allowDrop = "yes/no"
    allowXfer = "yes/no"
    allowConf = "yes/no"
    cancelAction = "some URI"
    wrapList = "yes/no"
    scrollConstrain = "yes/no"
    unitScroll = "yes/no"
    scrollUp = "Some URI"
    scrollDown = "Some URI"
    numberLaunch = "yes/no"
    >
        <Title      wrap="yes/no"
                    Color="white/black/red/green/brown/blue/magenta
                                cyan/lightgray/darkgray/lightred/lightgreen
                                yellow/lightblue/lightmagenta/lightcyan"
            >Menu Title</Title>
        <TopTitle   icon="icon index"
                    Color="white/black/red/green/brown/blue/magenta
                                cyan/lightgray/darkgray/lightred/lightgreen
                                yellow/lightblue/lightmagenta/lightcyan"
            >Top Title</TopTitle>
        <MenuItem base = "http://base/" icon = "icon index">
            <Prompt Color="white/black/red/green/brown/blue/magenta
                                cyan/lightgray/darkgray/lightred/lightgreen
                                yellow/lightblue/lightmagenta/lightcyan"
                    split="integer"
                    >First Choice</Prompt>
            <URI>http://somepage.xml</URI>
            <Dial line="SIP line">Number to dial</Dial>
                <Selection>Selection</Selection>
            </MenuItem>
            <!--Additional Menu Items may be added (up to 30)-->
            <IconList>
                <Icon index = "int">Icon:Iconname or HEX string</Icon>
                <!--As many as different icons used in the object -->
            </IconList>
            <!--Additional Softkey Items may be added (softkey phones)-->
        </AastraIPPhoneTextMenu>

```

Notes:



- The number of items in a TextMenu object is limited to 30.
 - You must declare at least one item in a TextMenu or the phone will generate a parsing error.
 - Non softkey phones (6731i/6863i/6865i) support only “numbered” style.
-

XML Document Objects

Document Object	Position	Type	Comments
AastralIPPhoneTextMenu	Root tag	Mandatory	Root object

Document Object	Position	Type	Comments
defaultIndex	Root tag	Optional	Position of the cursor when the XML object is open. If not specified the arrow is positioned on the first menu item.
style	Root tag	Optional	"numbered/none/radio" indicates the style of the TextMenu. Default is "numbered". <i>Ignored on 6731i, 6863i and 6865i style is always "numbered"</i> <i>Ignored on 6867i, 6869i and 6739i, style is always "none"</i>
destroyOnExit	Root tag	Optional	"yes/no" indicates if the object is kept or not in the phone browser after exit. If not specified, the object is kept in the browser.
cancelAction	Root tag	Optional	Defines the URI to be called when the user cancels the XML object.
wrapList	Root tag	Optional	"yes" or "no" to indicate if the items will be text wrapped on 2 lines, default is "no". <i>Ignored on 6867i, 6869i and 6739i, lines are automatically wrapped.</i>
Beep	Root tag	Optional	"yes" or "no" to indicate if a notification beep must be generated by the phone.
Timeout	Root tag	Optional	Overrides the default 45 seconds timeout of the UI XML object. A Timeout set to "0" will disable the timeout feature. See section 4.10.2 for more details
LockIn	Root tag	Optional	If set to "yes", the phone ignores all events that would cause the screen to exit without using the keys defined by the object. Default value is "no". See section 4.10.3 for more details.
GoodbyeLockInURI	Root tag	Optional	Valid only if LockIn="yes", this tag defines a URI to be called when the "Goodbye" key is pressed during a locked XML session. This URI overrides the native behavior of the "Goodbye" key which is to destroy the current XML object displayed.
allowAnswer	Root tag	Optional	This tag applies only to the non-softkey phones. If set to "yes", the phone will display "Ignore" and "Answer" if the XML object is displayed when the phone is in the ringing state. Default value is "no". See section 6.3 for more details. <i>Only for 6730i, 6731i, 53i, 6739i, 9143i, 6863i, 6865i.</i>

Document Object	Position	Type	Comments
allowDrop	Root tag	Optional	This tag applies only to the non-softkey phones. If set to "yes", the phone will display "Drop" if the XML object is displayed when the phone is in the connected state. Default value is "no". See section 6.4 for more details. <i>Only for 6730i, 6731i, 53i, 6739i, 9143i, 6863i, 6865i</i>
allowXfer	Root tag	Optional	This tag applies only to the non-softkey phones. If set to "yes", the phone will display "Xfer" if the XML object is displayed when the phone is in the connected state. Default value is "no". See section 6.4 for more details. <i>Only for 6730i, 6731i, 53i, 6739i, 9143i, 6863i, 6865i</i>
allowConf	Root tag	Optional	This tag applies only to the non-softkey phones. If set to "yes", the phone will display "Conf" if the XML object is displayed when the phone is in the connected state. Default value is "no". See section 6.4 for more details. <i>Only for 6730i, 6731i, 53i, 6739i, 9143i, 6863i, 6865i</i>
scrollConstrain	Root tag	Optional	If set to "yes", the phone will not "wrap" the list: scrolling down the last item does not move the cursor to the first item. Default value is "no".
numberLaunch	Root tag	Optional	If set to "yes", the phone will allow the user to "launch" an item URI using the keypad (items 1-9 only). Default value is "no". <i>Ignored on 6739i</i>
unitScroll	Root tag	Optional	If set to "yes", the 6739i will scroll the menu items in the list as it is done on the other phones, pressing the Up/Down arrow moves the selected item by one. Default value is "no". <i>6739i only</i>
scrollUp	Root tag	Optional	This tag allows overriding the default behavior of the Up arrow key once the scrolling reaches an end.
scrollDown	Root tag	Optional	This tag allows overriding the default behavior of the Down arrow key once the scrolling reaches an end.
Title	Body	Optional	Text to be used as title for the

Document Object	Position	Type	Comments
			object
Wrap	Title tag	Optional	If set to “yes” the title of the object will be wrapped on 2 lines. Ignored on 6867i, 6869i and 6739i, lines are automatically wrapped.
Color	Title tag	Optional	Label color, the possible values are: “white”, “black”, “red”, “green”, “brown”, “blue”, “magenta”, “cyan”, “lightgray”, “darkgray”, “lightred”, “lightgreen”, “yellow”, “lightblue”, “lightmagenta”, “lightcyan” If not specified the default value is “white”. <i>6867i, 6869i and 6739i only</i>
TopTitle	Body	Optional	Text to be used as top title for the object <i>6867i, 6869i and 6739i only.</i>
Icon	TopTitle tag	Optional	Index of the icon to be used for the top title <i>6867i, 6869i and 6739i only.</i>
Color	TopTitle tag	Optional	Label color, the possible values are: “white”, “black”, “red”, “green”, “brown”, “blue”, “magenta”, “cyan”, “lightgray”, “darkgray”, “lightred”, “lightgreen”, “yellow”,

Document Object	Position	Type	Comments
			"lightblue", "lightmagenta", "lightcyan" If not specified the default value is "white". <i>6867i, 6869i and 6739i only</i>
MenuItem	Body	Mandatory	Choice Item (up to 30 instances, minimum is 1 instance)
Base	MenuItem tag	Optional	The value of this attribute is pre-pended to the value in the URI tags.
Icon	MenuItem tag	Optional	Index of the icon to be used for this menu entry <i>6739i, 6755i, 6757i, 6757iCT, 6735i, 6737i, 6867i and 6869i only.</i>
Prompt	MenuItem body	Mandatory	Label of the item
Color	Prompt tag	Optional	Label color, the possible values are: "white", "black", "red", "green", "brown", "blue", "magenta", "cyan", "lightgray", "darkgray", "lightred", "lightgreen", "yellow", "lightblue", "lightmagenta", "lightcyan" If not specified the default value is "white". <i>6867i, 6869i and 6739i only</i>
split	Prompt tag	Optional	This attribute tells where to split the prompt on 2 lines giving the position of the first character of the second line. <i>6867i, 6869i and 6739i only</i>
URI	MenuItem body	Mandatory	URI to be used if the user press "Select" with the cursor on this item
Dial	MenuItem	Optional	Defines what number will be dialed

Document Object	Position	Type	Comments
	body		when an offhook action is performed on the phone or if the “Dial2” custom softkey is pressed
line	Dial tag	Optional	Defines which SIP line to use when the Dial command is executed. If omitted, the Dial command is performed using the first available SIP line.
Selection	MenuItem body	Optional	This tag must be used in conjunction with custom softkeys. See Section 4.11 for details
IconList	Body	Optional	List of icon definitions <i>6867i, 6869i, 6739i, 6755i, 6757i, 6757iCT, 6735i and 6737i only.</i>
Icon	IconList body	Optional	Icon value, it can be “Icon:Iconname”, an hexadecimal string representing the icon (except 6739i) or the URL to a png file (6739i only) . See section 4.2.2 for more details. <i>6867i, 6869i, 6739i, 6755i, 6757i, 6757iCT, 6735i and 6737i only.</i>
Index	Icon tag	Optional	Index of the icon must be consistent with the ‘Icon’ used in the MenuItems. <i>6867i, 6869i, 6739i, 6755i, 6757i, 6757iCT, 6735i and 6737i only.</i>
SoftKey	Body	Optional	See section 4.1 for details



Note: the numberLaunch tag works for all TextMenu styles.

Limitations on non softkey phones

- Custom Softkeys are not supported
- Icons are not supported
- Only “numbered” is supported for the style tag.

3.1.4 DIALING FROM A TEXTMENU

Dialing from a TextMenu is different between the Mitel 6739i and Mitel 675xi.

On the 675xi, you have 4 ways to dial from a TextMenu using custom softkeys

- “Dial: PhoneNumber” in the menuItem URI tag, triggered by the “Select” softkey,
- “PhoneNumber” in the menuItem URI tag, triggered by the “Dial” custom softkey,
- “PhoneNumber” in the menuItem Dial tag, triggered by the “Dial2” custom softkey.
- “PhoneNumber” in the menuItem Selection tag, triggered by a custom softkey pointing to a script parsing the selection parameter and dialing “PhoneNumber” via a PhoneExecute command.

On the 6739i, you have only 3 ways to dial from a TextMenu without using any custom softkey

- “Dial: PhoneNumber” in the menuitem `URI` tag, triggered by the  button on the item,
- `PhoneNumber` in the menuitem `Dial` tag, triggered by the  button on the item. This is the recommended way.
- “PhoneNumber” in the menuitem `Selection` tag, triggered by a custom softkey pointing to a script parsing the selection parameter and dialing “PhoneNumber” via a `PhoneExecute` command.

3.1.5 TEXTMENU STYLES (WHEN SUPPORTED)



Figure 21: “numbered” style TextMenu



Figure 22: “none” style TextMenu



Figure 23: “radio” style TextMenu

3.1.6 EXAMPLES

XML Example 1

```
<AastraIPPhoneTextMenu>
    <Title>Phone Services</Title>
    <MenuItem base = "http://10.50.10.53/">
        <Prompt>Traffic Reports</Prompt>
        <URI> rss_to_xml.pl</URI>
    </MenuItem>
    <MenuItem>
        <Prompt>Employee List</Prompt>
        <URI>employees.xml</URI>
    </MenuItem>
    <MenuItem base ="">
        <Prompt>Weather</Prompt>
        <URI>http://10.50.10.52/weather.pl</URI>
    </MenuItem>
</AastraIPPhoneTextMenu>
```

Resulting Screens (non softkey phones)



Figure 24: TextMenu Example 1 (non softkey phones)

Resulting Screen (softkey phones)



Figure 25: TextMenu Example 1 (softkey phone)

Resulting Screen (6739i)

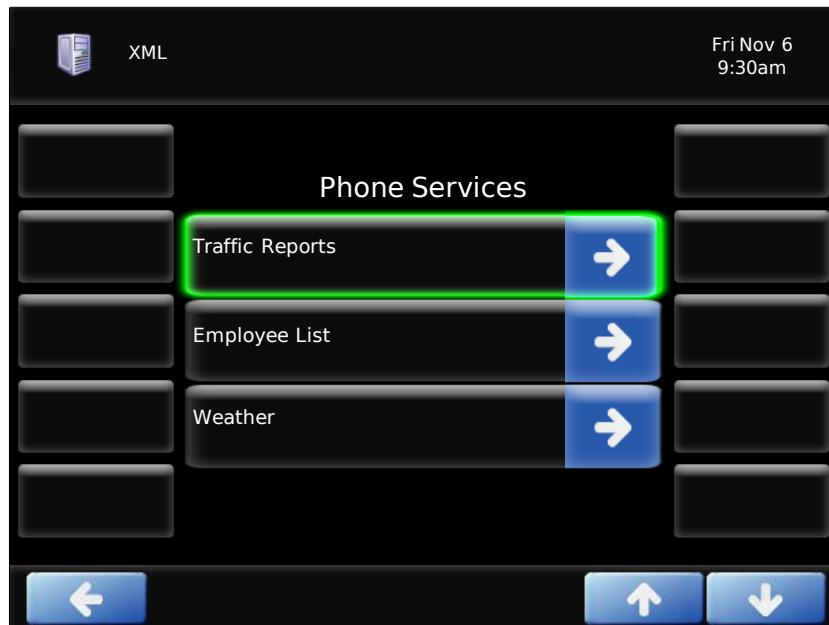


Figure 26: TextMenu Example 1 (6739i)

XML Example 2 (softkey phones)

```
<AastraIPPhoneTextMenu>
    <Title>Phone Services</Title>
    <MenuItem base = "http://10.50.10.53/" icon="1">
        <Prompt>Traffic Reports</Prompt>
        <URI> rss_to_xml.pl</URI>
    </MenuItem>
    <MenuItem icon="2">
        <Prompt>Employee List</Prompt>
        <URI>employees.xml</URI>
    </MenuItem>
    <MenuItem base ="" icon="3">
        <Prompt>Weather</Prompt>
        <URI>http://10.50.10.52/weather.pl</URI>
    </MenuItem>
    <IconList>
        <Icon index="1">045E545E0400</Icon>
        <Icon index="2">FEAA8292FE00</Icon>
        <Icon index="3">C00E60029800</Icon>
    </IconList>
</AastraIPPhoneTextMenu>
```

Resulting Screen



Figure 27: TextMenu Example 2 (softkey phone)

XML Example 3 (touchscreen phone)

```
<AastraIPPhoneTextMenu>
    <Title>Directory John Doe</Title>
    <MenuItem>
        <Prompt>Work Number</Prompt>
        <URI>http://myserver/myscript.php?a=zoom&n=1234</URI>
        <Dial>1234</Dial>
        <Selection>1234</Selection>
    </MenuItem>
    <MenuItem>
        <Prompt>Cell Number</Prompt>
        <URI>http://myserver/myscript.php?a=zoom&n=2345</URI>
        <Dial>2345</Dial>
        <Selection>2345</Selection>
    </MenuItem>
    <MenuItem>
        <Prompt>Home Number</Prompt>
        <URI>http://myserver/myscript.php?a=zoom&n=3456</URI>
        <Dial>3456</Dial>
        <Selection>3456</Selection>
    </MenuItem>
    <SoftKey index = "1">
        <Label>Delete</Label>
        <URI>http://myserver/myscript.php?a=delete</URI>
    </SoftKey>
    <SoftKey index = "2">
        <Label>Edit</Label>
        <URI>http://myserver/myscript.php?a=edit</URI>
    </SoftKey>
</AastraIPPhoneTextMenu>
```

In this example, with item 1 selected:

- Pressing the  icon on the item, will call <http://myserver/myscript.php?a=zoom&n=1234>
- Pressing the  icon on the item, will make the phone dial “1234”
- Pressing the “Delete” softkey, will call
<http://myserver/myscript.php?a=delete&selection=1234>
- Pressing the “Edit” softkey, will call
<http://myserver/myscript.php?a=edit&selection=1234>

Resulting Screen

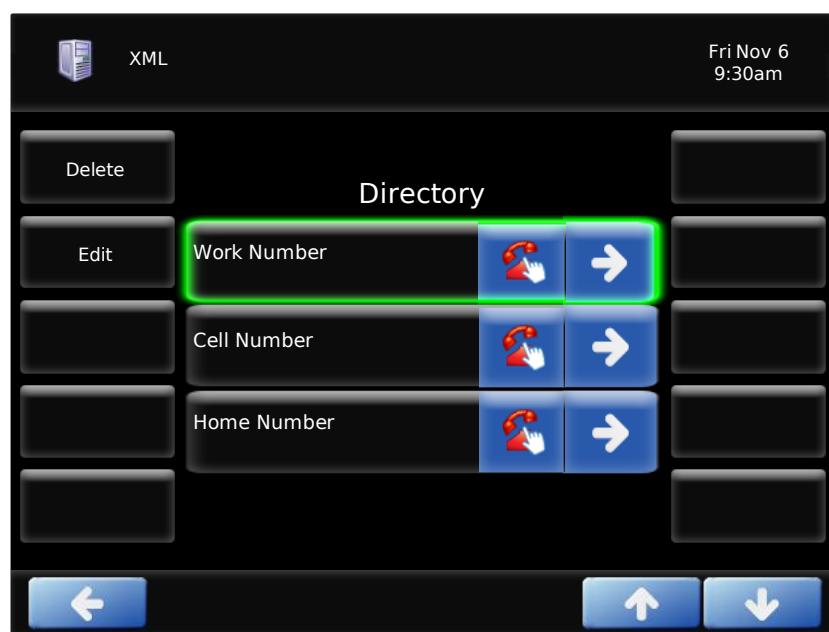


Figure 28: TextMenu Example 2 (6739i)

3.2 IMAGEMENU OBJECT (55I/57I/57ICT/6735I/6737I/6739I/6867I/6869I)

The ImageMenu object allows using a bitmap image to serve as a menu. This is desirable when a user wants to display menu choices in some non-ASCII character set or with pictures only. Each menu selection is linked to a keypad key (0-9, *, #).allows developers to create a numerical list of choices.

3.2.1 IMPLEMENTATION (55I/57I/57ICT/6535I/6737I)

The image itself is specified as a series of hexadecimal characters. See chapter 4.2.1.1 for more details.

Note: With firmware 4.1.0 the image size is limited to 144x40 pixels.

Object native interaction

- **Done** Redisplays the previous XML object present in the phone browser.

Object default Softkeys

Position	Label	Description	URIs
6	Done	Redisplays the previous XML object present in the phone browser.	SoftKey:Exit

Notes:

- the Left Arrow key default interaction is disabled if the `LockIn` tag is set to "yes".
- the Left Arrow key default interaction can be modified using the `cancelAction` tag on a non-softkey phone.
- If the `LockIn` tag is set to "yes" and the `cancelAction` tag is configured, pressing the Left Arrow key triggers the configured `cancelAction`.
- the Right arrow key default interaction can be modified using the `doneAction` tag on a non-softkey phone.

3.2.2 IMPLEMENTATION (6867I)

For the 6867i, the image is either a 24/32 bit depth "png" or a "jpeg" file located on a server and which can be downloaded by the phone using TFTP, FTP, HTTP or HTTPS. See chapter 4.2.1.2 for more details.

Two image sizes are supported:

- Up to 320x180 pixels (mode=regular or extended).
- Up to 320x240 pixels (mode=fullscreen). In that case, the softkeys are not displayed.

If the image is bigger than the size supported by the requested mode, the image is clipped based on the requested alignment.

If the image is smaller than the size supported by the requested mode, the image is displayed based on the requested alignment

The **Left** key is mapped to the `cancelAction` tag, if not specified the XML object is destroyed.

Note:

- the Left Arrow key default interaction is disabled if the `LockIn` tag is set to "yes".

-
- If the `LockIn` tag is set to “yes” and the `cancelAction` tag is configured, pressing the Left Arrow key triggers the configured `cancelAction`.
 - The up, down, left and right arrow key default interactions can be overridden using the `scrollUp`, `scrollDown`, `scrollLeft` and `scrollRight` tags.
-

Object default Softkeys

Six (four physical) customizable softkeys are available for this object.

Position	Label	Interaction	URIs
4	Done	Exit: Redisplays the previous XML object present in the phone browser.	SoftKey:Exit

The following figure details how the `AastraIPPhoneImageMenu` is implemented on the Mitel 6867i.



Figure 29: ImageMenu 6867i implementation (mode regular/extended)

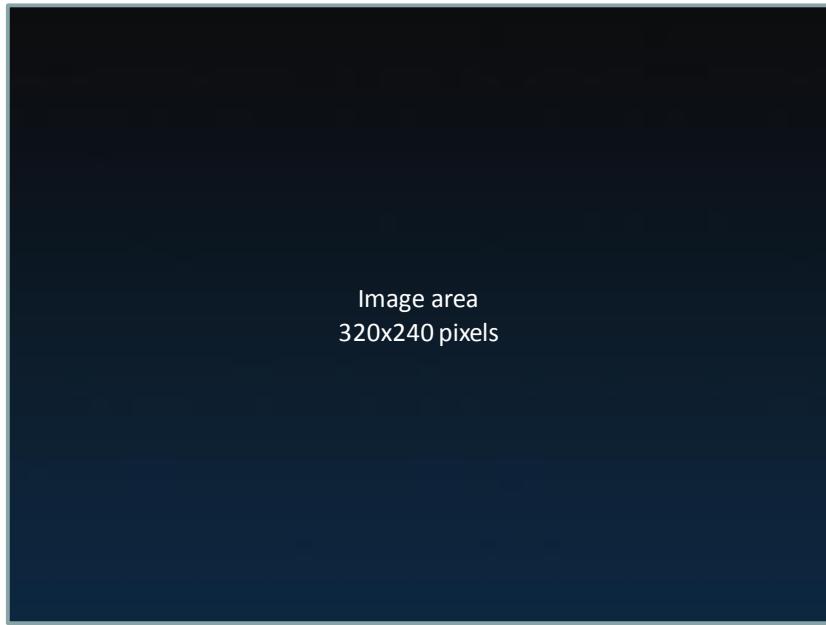


Figure 30: ImageMenu 6867i implementation (fullscreen mode)

Also a URI can be programmed to be called when the user presses the **Select** key (imageAction root tag). If this tag is empty, phone will use the URI configured by the doneAction tag (SoftKey:Exit by default).

So by default pressing the **Select** key destroys the current XML object unless an imageAction or a doneAction is configured.

Native Interaction

- “SoftKey:Exit”

3.2.3 IMPLEMENTATION (6869I)

For the 6869i, the image is either a 24/32 bit depth “png” or a “jpeg” file located on a server and which can be downloaded by the phone using TFTP, FTP, HTTP or HTTPS. See chapter 4.2.1.2 for more details.

Two image sizes are supported:

- Up to 480x192 pixels (mode=regular or extended).
- Up to 480x272 pixels (mode=fullscreen). In that case, the softkeys are not displayed.

If the image is bigger than the size supported by the requested mode, the image is clipped based on the requested alignment.

If the image is smaller than the size supported by the requested mode, the image is displayed based on the requested alignment

The **Left** key is mapped to the cancelAction tag, if not specified the XML object is destroyed.

Note:

- the Left Arrow key default interaction is disabled if the `LockIn` tag is set to “yes”.
- If the `LockIn` tag is set to “yes” and the `cancelAction` tag is configured, pressing the Left Arrow key triggers the configured `cancelAction`.
- The up, down, left and right arrow key default interactions can be overridden using the `scrollUp`, `scrollDown`, `scrollLeft` and `scrollRight` tags.



Object default Softkeys

Six (four physical) customizable softkeys are available for this object.

Position	Label	Interaction	URIs
4	Done	Exit: Redisplays the previous XML object present in the phone browser.	SoftKey:Exit

The following figure details how the `AastraIPPhoneImageMenu` is implemented on the Mitel 6867i.

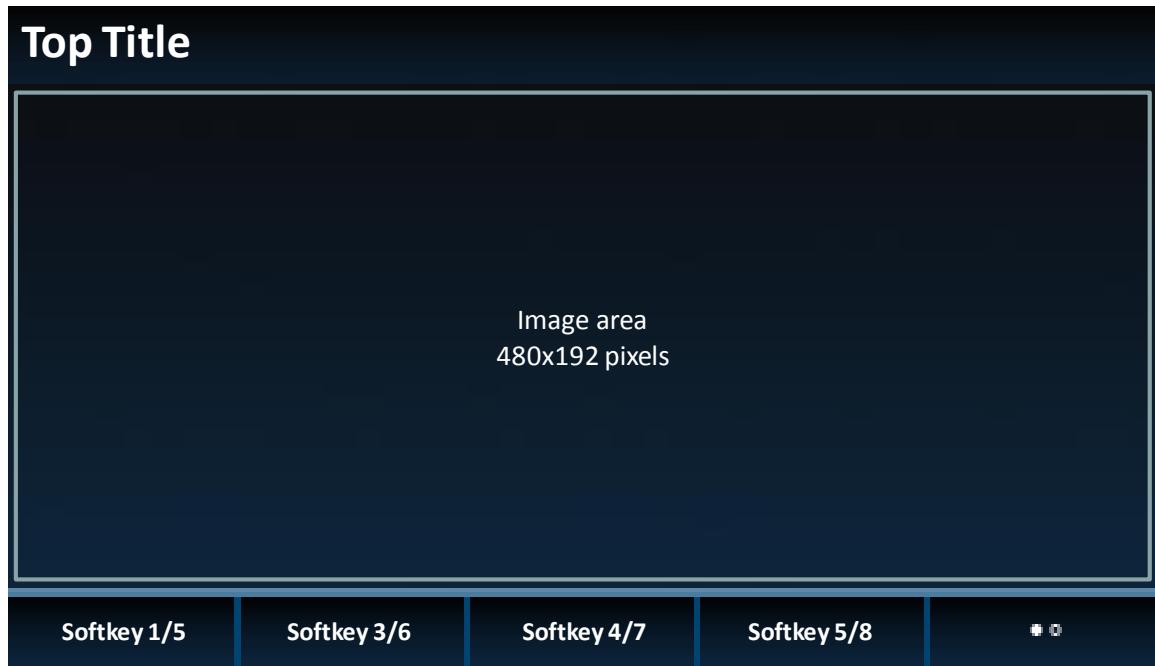


Figure 31: ImageMenu 6869i implementation (mode regular/extended)

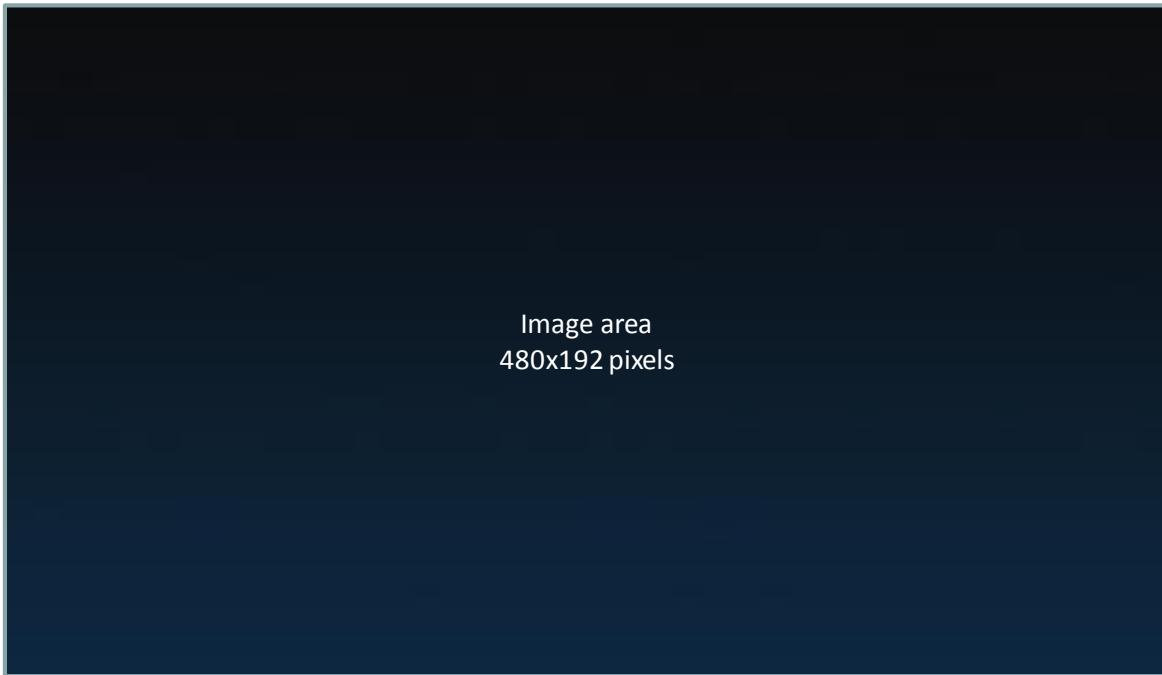


Figure 32: ImageMenu 6869i implementation (fullscreen mode)

Also a URI can be programmed to be called when the user presses the **Select** key (imageAction root tag). If this tag is empty, phone will use the URI configured by the doneAction tag (SoftKey:Exit by default).

So by default pressing the **Select** key destroys the current XML object unless an imageAction or a doneAction is configured.

Native Interaction

- “SoftKey:Exit”

3.2.4 IMPLEMENTATION (6739i)

For the 6739i, the image is a 24 bit depth “png” or “jpeg” file located on a server and which can be downloaded by the phone using TFTP, FTP, HTTP or HTTPS. See chapter 4.2.1.2 for more details.

Three image sizes are supported:

- 380x340 pixels (mode=regular).
- 640x340 pixels (mode=extended).
- 640x480 pixels (mode=fullscreen).

The key is mapped to the cancelAction tag, if not specified the XML object is destroyed.



Note: the key interaction is disabled if the LockIn tag is set to “yes”.

Object default Softkeys

Ten customizable softkeys are available for this object.

Position	Label	Interaction	URIs
10	Done	Exit: Redisplays the previous XML object present in the phone browser.	SoftKey:Exit

The following figure details how the `AstraIPPhoneImageMenu` is implemented on the Mitel 6739i.



Figure 33: ImageMenu implementation (regular mode)

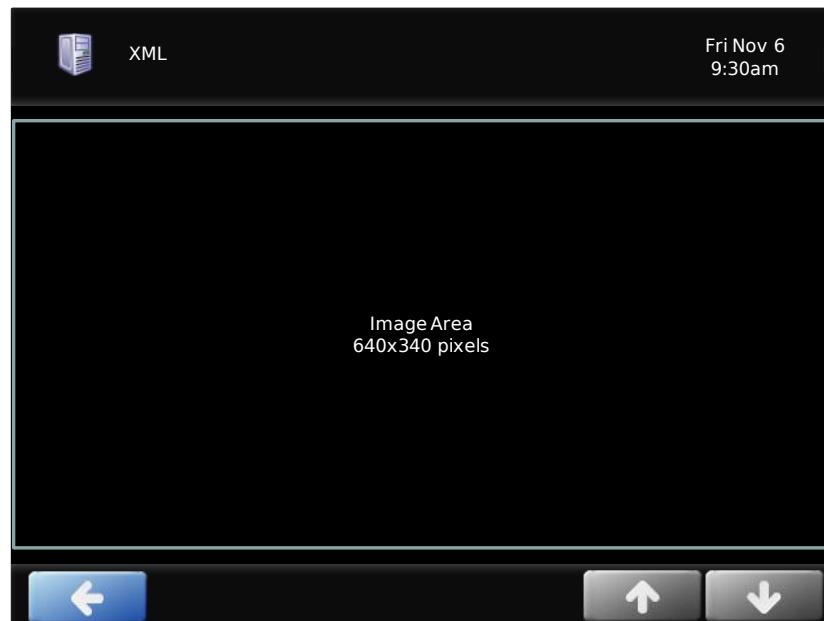


Figure 34: ImageMenu implementation (extended mode)

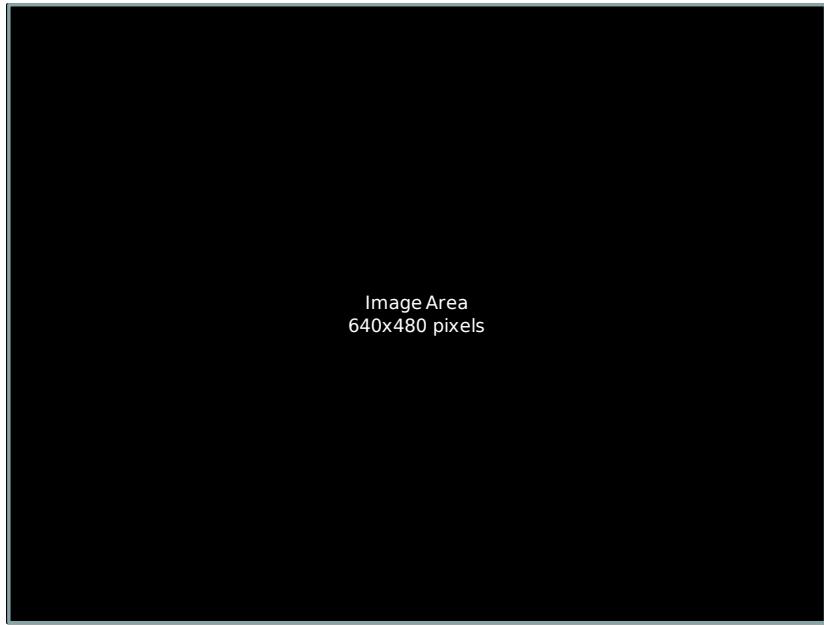


Figure 35: ImageMenu implementation (fullscreen mode)

Also a URI can be programmed to be called when the user presses on the displayed image (imageAction root tag). If this tag is empty, phone will use the URI configured by the doneAction tag (SoftKey:Exit by default).

So by default pressing on the image destroys the current XML object unless an imageAction or a doneAction is configured.

Native Interaction

- “SoftKey:Exit”

3.2.5 XML DESCRIPTION

```

<AstraIPPhoneImageMenu
    destroyOnExit = "yes/no"
    cancelAction = "some URI"
    doneAction = "some URI"
    imageAction = "some URI"
    Beep = "yes/no"
    Timeout = "some integer"
    LockIn = "yes/no"
    GoodbyeLockInURI = "some URI"
    mode = "regular/extended/fullscreen"
    >
        <TopTitle    icon="icon index"
                      Color="white/black/red/green/brown/blue/magenta
                      cyan/lightgray/darkgray/lightred/lightgreen
                      yellow/lightblue/lightmagenta/lightcyan"
            >Top Title</TopTitleheight = "height in pixels"
            width = "width in pixels"
        >Image as hexadecimal characters or URL</ImageURIList base = "http://someserver/">
            <URI key = "0">link1.php</URIURI key = "#">link3.php</URIURIList>
        <!--Additional Softkey Items may be added -->
    </AstraIPPhoneImageMenu>

```

XML Document Objects

Document Object	Position	Type	Comments
AastralIPPhoneImageMenu	Root tag	Mandatory	Root object
destroyOnExit	Root tag	Optional	"yes/no" indicates if the object is kept or not in the phone browser after exit. If not specified, the object is kept in the browser.
cancelAction	Root tag	Optional	Defines the URI to be called when the user cancels the XML object.
doneAction	Root tag	Optional	Defines the URI to be called when the user selects the "Done" softkey or 'SoftKey:Exit'.
imageAction	Root tag	Optional	Defines the URI to be called when the user presses on the image. <i>6867i, 6869i and 6739i only.</i>
Beep	Root tag	Optional	"yes" or "no" to indicate if a notification beep must be generated by the phone.
Timeout	Root tag	Optional	Overrides the default 45 seconds timeout of the UI XML object. A Timeout set to "0" will disable the timeout feature. See section 4.10.1 for more details
LockIn	Root tag	Optional	If set to "yes", the phone ignores all events that would cause the screen to

Document Object	Position	Type	Comments
			exit without using the keys defined by the object. Default value is "no". See section 4.10.3 for more details.
GoodbyeLockInURI	Root tag	Optional	Valid only if LockIn="yes", this tag defines a URI to be called when the "Goodbye" key is pressed during a locked XML session. This URI overrides the native behavior of the "Goodbye" key which is to destroy the current XML object displayed.
mode	Root tag	Optional	Configures the display mode, "regular", "extended" or "fullscreen" <i>6867i, 6869i and 6739i only</i>
TopTitle	Body	Optional	Text to be used as top title for the object <i>6867i, 6869i and 6739i only.</i>
Icon	TopTitle tag	Optional	Index of the icon to be used for the top title <i>6867i, 6869i and 6739i only.</i>
Color	TopTitle tag	Optional	Label color, the possible values are: "white", "black", "red", "green", "brown", "blue", "magenta", "cyan", "lightgray", "darkgray", "lightred", "lightgreen", "yellow", "lightblue", "lightmagenta", "lightcyan" If not specified the default value is "white". <i>6867i, 6869i and 6739i only</i>
Image	Body	Mandatory	Image to be displayed as a series of hexadecimal characters or a URL. See section 4.2.1 for more details.
verticalAlign	Image tag	Optional	Vertical position of the image ("top", "middle" or "bottom"). If the tag is not specified, the object will use "middle" as a default value.
horizontalAlign	Image tag	Optional	Horizontal position of the image ("left", "middle" or "right"). If the tag is not specified, the object will use "middle" as a default value.

Document Object	Position	Type	Comments
height	Image tag	Mandatory	Height in pixels. Must match the image height. <i>Optional and Ignored on 6867i and 6869i</i>
width	Image tag	Mandatory	Width in pixels. Must match the image width. <i>Optional and Ignored on 6867i and 6869i</i>
URIList	Body	Mandatory	Master tag of the URI list linked to a keypad key (0-9, * and #)
Base	URIList tag	Optional	The value of this attribute is pre-pended to the value in the URI tags.
URI	URIList body	Mandatory	URI to be used if the user presses the key defined in the "key" tag.
key	URI tag	Mandatory	This tag defines the key that will trigger the selection (0-9, * and #).
SoftKey	Body	Optional	See section 4.1 for details

3.2.6 EXAMPLES

XML Example (55i/57i/57iCT)

Resulting Screen



Figure 36: ImageMenu Example (55i/57i/57iCT/6735i/6737i)

XML Example (6739i)

```
<AastraIPPhoneImageMenu destroyOnExit="yes">
<Image height="300" width="380">tftp://server.com/menu.png</Image>
<URIList>
<URI key="1">http://myserver.com?choice=1</URI>
<URI key="2">http://myserver.com?Choice=2</URI>
</URIList>
<SoftKey index="1" icon="1">
<Label>Label</Label>
<URI>http://myserver.com/script.php?action=1</URI>
</SoftKey>
<SoftKey index="10">
<Label>Exit</Label>
<URI>SoftKey:Exit</URI>
</SoftKey>
<IconList>
<Icon index="1">Icon:Envelope</Icon>
</IconList>
</AastraIPPhoneImageMenu>
```

Resulting Screen



Figure 37: ImageMenu Example (6739i)

3.3 TEXTSCREEN OBJECT (ALL MODELS)

The TextScreen object can be used to display text. The screen word-wraps appropriately and can scroll to display a message longer than the physical display.

3.3.1 IMPLEMENTATION (SOFTKEY AND NON SOFTKEY PHONES)

The object is displayed on 2 lines. The Up and Down arrow keys allow the user to browse the rest of the text.

Line selected	Label	Keys	
Title/Text	vNext	Up and Down Arrow	Browse up or down
	>Done	Right Arrow	Done
		Left Arrow	Exit

Softkey phone keys

The object is displayed on up to 6 lines, the title stays on the top of the display. The Up and Down arrow keys allow the user to browse the rest of the text.

Line selected	Keys
Text	Up and Down Arrow
	Right Arrow
	Left Arrow

Note:

- the Left Arrow key default interaction is disabled if the `LockIn` tag is set to “yes”.
- the Left Arrow key default interaction can be modified using the `cancelAction` tag on a non-softkey phone.
- If the `LockIn` tag is set to “yes” and the `cancelAction` tag is configured, pressing the Left Arrow key triggers the configured `cancelAction`.
- the Right arrow key default interaction can be modified using the `doneAction` tag on a non-softkey phone.
- The up, down, left and right arrow key default interactions can be overridden using the `scrollUp`, `scrollDown`, `scrollLeft` and `scrollRight` tags.

Object native interaction

- **Done** Redisplays the previous XML object present in the phone browser.

Object default Softkeys (softkey phones)

Position	Label	Description	URIs
6	Done	Redisplays the previous XML object present in the phone browser.	SoftKey:Exit

3.3.2 IMPLEMENTATION (6867I/6869I)

The title is displayed at the top of the XML area and uses up to 2 lines. The text is displayed after the title area and up to 8 lines can be displayed.

 **Note:** The Text and Title area use the same font (fnt and size) but the Title is displayed in bold.

The **Left** key is mapped to the `cancelAction` tag, if not specified the XML object is destroyed.

The **Up/Down** keys allow up and down scrolling in order to display the complete text.

The **Right** and **Select** keys are mapped to the doneAction tag, if not specified the previous XML object in the stack is displayed.

Six (eight) customizable softkeys are available for this object. If more than 4 (5) softkeys are configured the softkeys are displayed on 2 pages.



Note: the **Left** key interaction is disabled if the `LockIn` tag is set to "yes".

Object default Softkeys (6867i)

Six customizable softkeys are available for this object.

Position	Label	Interaction	URIs
4	Done	Exit: Redisplays the previous XML object present in the phone browser.	SoftKey:Exit

Object default Softkeys (6869i)

Eight customizable softkeys are available for this object.

Position	Label	Interaction	URIs
5	Done	Exit: Redisplays the previous XML object present in the phone browser.	SoftKey:Exit

The following figures detail how the `AastralIPPhoneTextScreen` is implemented on the Mitel 6867i. The size of the text zone depends on the presence of the optional title.



Figure 38: TextScreen implementation on 6867i

Native Interaction

- “SoftKey:Exit”

3.3.3 IMPLEMENTATION (6739i)

The title is displayed at the top of the XML area and uses up to 2 lines. The text is displayed after the title area and up to 10 lines can be displayed.

Note: The Text area uses a smaller font than the Title area.

The key is mapped to the cancelAction tag, if not specified the XML object is destroyed.

The keys allow up and down scrolling in order to display the complete text.

Ten customizable softkeys are available for this object.

Note: the key interaction is disabled if the LockIn tag is set to "yes".

Object default Softkeys

Ten customizable softkeys are available for this object.

Position	Label	Interaction	URIs
10	Done	Exit: Redisplays the previous XML object present in the phone browser.	SoftKey:Exit

The following figure details how the AastraIPPhoneTextScreen is implemented on the Mitel 6739i.



Figure 39: TextScreen implementation on 6739i

Native Interaction

- “SoftKey:Exit”

3.3.4 XML DESCRIPTION

“Red” tags indicates that the tag does not apply to all phones, when not supported the tags are just ignored.

```

<AAstraIPPhoneTextScreen
    destroyOnExit = "yes/no"
    cancelAction = "some URI"
    doneAction = "some URI"
    Beep = "yes/no"
    Timeout = "some integer"
    allowAnswer = "yes/no"
    allowDrop = "yes/no"
    allowXfer = "yes/no"
    allowConf = "yes/no"
    LockIn = "yes/no"
    GoodbyeLockInURI = "some URI"
    allowDTMF = "yes/no"
    scrollUp = "some URI"
    scrollDown = "some URI"
    scrollLeft = "some URI"
    scrollRight = "some URI"
    >
        <Title      wrap="yes/no"
                    Color="white/black/red/green/brown/blue/magenta
                           cyan/lightgray/darkgray/lightred/lightgreen
                           yellow/lightblue/lightmagenta/lightcyan"
            >Screen Title</Title>
        <TopTitle   icon="icon index"
                    Color="white/black/red/green/brown/blue/magenta
                           cyan/lightgray/darkgray/lightred/lightgreen
                           yellow/lightblue/lightmagenta/lightcyan"
            >Top Title</TopTitle>
        <Text       Color="white/black/red/green/brown/blue/magenta
                           cyan/lightgray/darkgray/lightred/lightgreen
                           yellow/lightblue/lightmagenta/lightcyan"
            >The screen text goes here</Text>
        <Dial       line="SIP line"
            >Number to dial</Dial>
    <!--Additional Softkey Items may be added-->
</AAstraIPPhoneTextScreen>
```

XML Document Objects

Document Object	Position	Type	Comments
AAstraIPPhoneTextScreen	Root tag	Mandatory	Root object
destroyOnExit	Root tag	Optional	“yes/no” indicates if the object is kept or not in the phone browser after exit. If not specified, the object is kept in the browser.
cancelAction	Root tag	Optional	Defines the URI to be called when the user cancels the XML object.
doneAction	Root tag	Optional	Defines the URI to be called when the user selects the “Done” softkey or ‘SoftKey:Exit’.
Beep	Root tag	Optional	“yes” or “no” to indicate if a notification beep must be generated by the phone.
Timeout	Root tag	Optional	Overrides the default 45 seconds timeout of the UI XML object. A

Document Object	Position	Type	Comments
			Timeout set to "0" will disable the timeout feature. See section 4.10.2 for more details
LockIn	Root tag	Optional	If set to "yes", the phone ignores all events that would cause the screen to exit without using the keys defined by the object. Default value is "no". See section 4.10.3 for more details.
GoodbyeLockInURI	Root tag	Optional	Valid only if LockIn="yes", this tag defines a URI to be called when the "Goodbye" key is pressed during a locked XML session. This URI overrides the native behavior of the "Goodbye" key which is to destroy the current XML object displayed.
allowAnswer	Root tag	Optional	This tag applies only to the non-softkey phones. If set to "yes", the phone will display "Ignore" and "Answer" if the XML object is displayed when the phone is in the ringing state. Default value is "no". See section 6.3 for more details. <i>Only for 6730i, 6731i, 53i, 6739i, 9143i, 6863i, 6865i</i>
allowDrop	Root tag	Optional	This tag applies only to the non-softkey phones. If set to "yes", the phone will display "Drop" if the XML object is displayed when the phone is in the connected state. Default value is "no". See section 6.4 for more details. <i>Only for 6730i, 6731i, 53i, 6739i, 9143i, 6863i, 6865i</i>
allowXfer	Root tag	Optional	This tag applies only to the non-softkey phones. If set to "yes", the phone will display "Xfer" if the XML object is displayed when the phone is in the connected state. Default value is "no". See section 6.4 for more details. <i>Only for 6730i, 6731i, 53i, 6739i, 9143i, 6863i, 6865i</i>
allowConf	Root tag	Optional	This tag applies only to the non-softkey phones. If set to "yes", the phone will display "Conf" if the XML object is displayed when the phone is in the connected state. Default value is "no". See section 6.4 for more details. <i>Only for 6730i, 6731i, 53i, 6739i and 9143i, 6863i, 6865i</i>
allowDTMF	Root tag	Optional	This tag allows letting keypad strokes as DTMF when the phone is in the connected status.
scrollUp	Root tag	Optional	This tag allows overriding the default behavior of the Up arrow key once the scrolling reaches an end.

Document Object	Position	Type	Comments
			<i>Not available on 6739i.</i>
scrollDown	Root tag	Optional	This tag allows overriding the default behavior of the Down arrow key once the scrolling reaches an end. <i>Not available on 6739i.</i>
scrollLeft	Root tag	Optional	This tag allows overriding the default behavior of the Left arrow key once the scrolling reaches an end. <i>Not available on 6739i.</i>
scrollRight	Root tag	Optional	This tag allows overriding the default behavior of the Right arrow key once the scrolling reaches an end. <i>Not available on 6739i.</i>
Title	Body	Optional	Label to be used as title for the object
Wrap	Title tag	Optional	If set to "yes" the title of the object will be wrapped on 2 lines. <i>Ignored on 6867i, 6869i and 6739i, lines are automatically wrapped.</i>
Color	Title tag	Optional	Label color, the possible values are: "white", "black", "red", "green", "brown", "blue", "magenta", "cyan", "lightgray", "darkgray", "lightred", "lightgreen", "yellow", "lightblue", "lightmagenta", "lightcyan" If not specified the default value is "white". <i>6867i, 6869i and 6739i only</i>
TopTitle	Body	Optional	Text to be used as top title for the object <i>6867i, 6869i and 6739i only.</i>
Icon	TopTitle tag	Optional	Index of the icon to be used for the top title <i>6867i, 6869i and 6739i only.</i>
Color	TopTitle tag	Optional	Label color, the possible values are: "white", "black",

Document Object	Position	Type	Comments
			<ul style="list-style-type: none"> “red”, “green”, “brown”, “blue”, “magenta”, “cyan”, “lightgray”, “darkgray”, “lightred”, “lightgreen”, “yellow”, “lightblue”, “lightmagenta”, “lightcyan” <p>If not specified the default value is “white”.</p> <p><i>6867i, 6869i and 6739i only</i></p>
Text	Body	Mandatory	Text to be displayed.
Color	Text tag	Optional	<p>Text color, the possible values are:</p> <ul style="list-style-type: none"> “white”, “black”, “red”, “green”, “brown”, “blue”, “magenta”, “cyan”, “lightgray”, “darkgray”, “lightred”, “lightgreen”, “yellow”, “lightblue”, “lightmagenta”, “lightcyan” <p>If not specified the default value is “white”.</p> <p><i>6867i, 6869i and 6739i only</i></p>
Dial	Body	Optional	Defines what number will be dialed when an offhook action is performed on the phone or if the “Dial2” custom softkey is pressed
line	Dial tag	Optional	Defines which SIP line to use when the Dial command is executed. If omitted, the Dial command is performed using the first available SIP line.



Note: the URI configured via the scrollUp and scrollDown tags is triggered only when the scrolling reaches an end. If no scrolling is needed, the URI are immediately triggered otherwise, they are triggered after the scroll reaches its beginning or its end.

3.3.5 EXAMPLES

XML Example 1

```
<AAstraIPPhoneTextScreen>
  <Title>Screen Object</Title>
  <Text>The screen object can be implemented similar to the firmware info
screen. Note that white space is preserved in XML so the display should word-
wrap appropriately. Only three lines can display at a time.</Text>
</AAstraIPPhoneTextScreen>
```

Resulting Screens (non softkey phones)

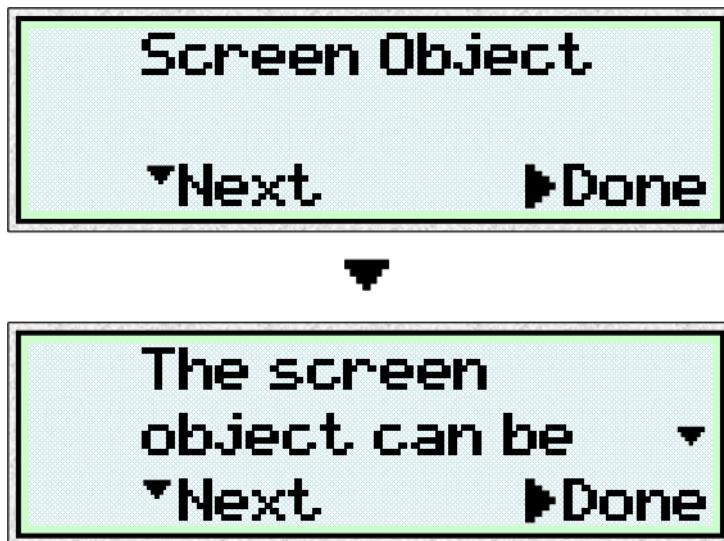


Figure 40: TextScreen Example (non softkey phones)

Resulting Screen (softkey phones)

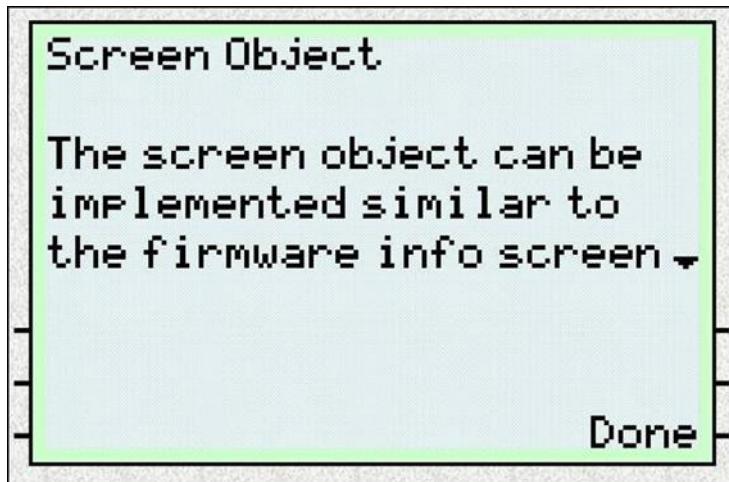


Figure 41: TextScreen Example (softkey phones)

XML Example 2

```
<AastraIPPhoneTextScreen>
    <Title>This is a very long title which should be on two lines</Title>
    <Text>Lorem Ipsum is simply dummy text of the printing and typesetting industry. Lorem Ipsum has been the industry's standard dummy text ever since the 1500s, when an unknown printer took a galley of type and scrambled it to make a type specimen book. It has survived not only five centuries, but also the leap into electronic typesetting, remaining essentially unchanged. It was popularised in the 1960s with the release of Letraset sheets containing Lorem Ipsum passages, and more recently with desktop publishing software like Aldus PageMaker including versions of Lorem Ipsum.</Text>
</AastraIPPhoneTextScreen>
```

Resulting Screen (6739i)

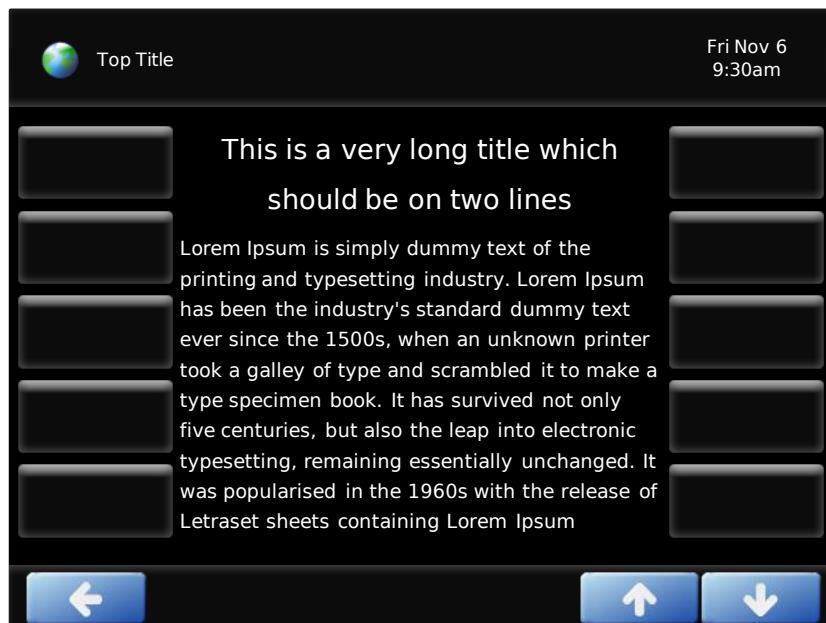


Figure 42: TextScreen Example (6739i)

XML Example 3

```
<AastraIPPhoneTextScreen>
    <Title>This is a very long title which should be on two lines but 6867i
has a large display.</Title>
    <Text>Lorem Ipsum is simply dummy text of the printing and typesetting
industry. Lorem Ipsum has been the industry's standard dummy text ever since
the 1500s, when an unknown printer took a galley of type and scrambled it to
make a type specimen book. It has survived not only five centuries, but also
the leap into electronic typesetting, remaining essentially unchanged. It was
popularised in the 1960s with the release of Letraset sheets containing Lorem
Ipsum passages, and more recently with desktop publishing software like Aldus
PageMaker including versions of Lorem Ipsum.</Text>
</AastraIPPhoneTextScreen>
```

Resulting Screen (6867i)

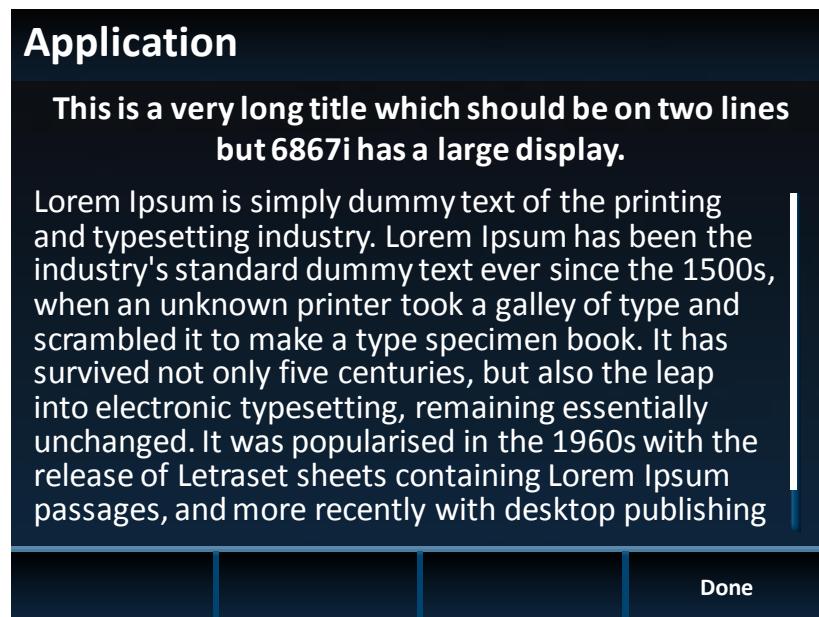


Figure 43: TextScreen Example (6867i)

3.4 FORMATTEDTEXTSCREEN OBJECT (ALL MODELS)

The `FormattedTextScreen` object allows the XML designer to display formatted (alignment, size, color and scrolling) text.

3.4.1 IMPLEMENTATION (SOFTKEY AND NON SOFTKEY PHONES)

This text is divided into 3 distinct blocks, any of which can be empty.

The first block is displayed at the top of the display and contains static text. This block takes up as many lines as the XML object specifies and can range from 0 up to the size of the physical screen.

The next block, displayed below the first block, displays scrolling text and takes up as many lines as the designer specifies up to the size of the screen.

The final block of contains static text and will take up whatever lines are left on the screen.

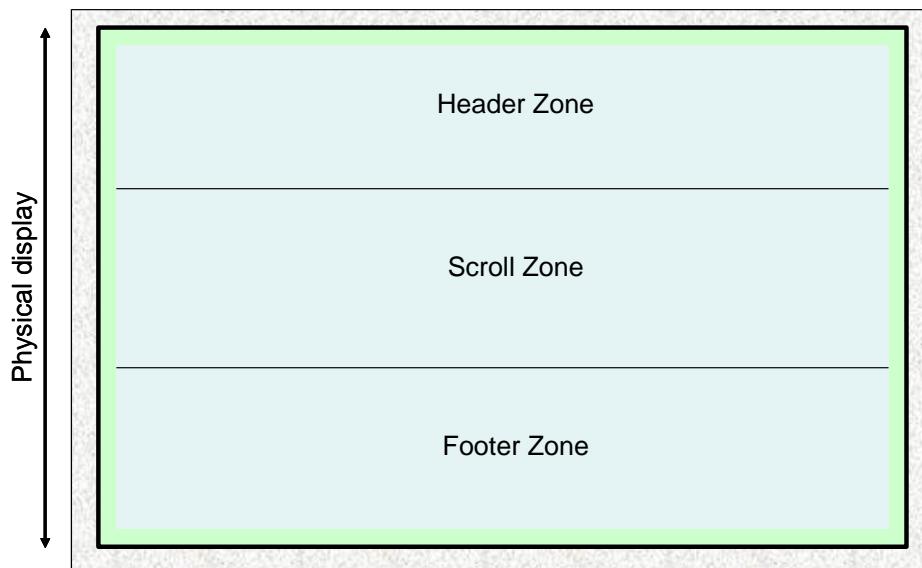


Figure 44: FormattedTextScreen layout

Object native interaction

- **Done** Redisplays the previous XML object present in the phone browser.

Non softkey phone keys

The object is displayed on 2 lines. The Up and Down arrow keys allow the user to browse the rest of the text.

Line selected	Label	Keys	
		Up and Down Arrow	Browse up or down (if scrollable)
Text	>Done	Right Arrow	Done
		Left Arrow	Exit

Softkey phone keys

The object is displayed on up to 6 lines, the title stays on the top of the display. The Up and Down arrow keys allow the user to browse the rest of the text.

Line selected	Keys
Text	Up and Down Arrow
	Right Arrow
	Left Arrow
	Exit

Note:

- the Left Arrow key default interaction is disabled if the `LockIn` tag is set to “yes”.
- the Left Arrow key default interaction can be modified using the `cancelAction` tag on a non-softkey phone..
- the Right arrow key default interaction can be modified using the `doneAction` tag on a non-softkey phone..
- The up, down, left and right arrow key default interactions can be overridden using the `scrollUp`, `scrollDown`, `scrollLeft` and `scrollRight` tags.

Object default Softkeys (softkey phones)

Position	Label	Description	URIs
6	Done	Redisplays the previous XML object present in the phone browser.	SoftKey:Exit

3.4.2 IMPLEMENTATION (6867I/6869I)

The text zone is divided into 3 distinct blocks, any of which can be empty.

The first block (header zone) is displayed at the top of the display and contains static text. This block takes up as many lines as the XML object specifies and can range from 0 up to the size of the physical screen.

The next block (scrolling zone), displayed below the first block, displays scrolling text and takes up as many lines as available, the size of the scrolling zone is automatically determined by using what's left of the display between the header zone and the footer zone.

The final block (footer zone) contains static text and will take up whatever lines are left on the screen starting from the bottom.



Figure 45: FormattedTextScreen layout on 6867i

The *Left* key is mapped to the cancelAction tag, if not specified the XML object is destroyed.

The *Up/Down* keys allow up and down scrolling in order to display the complete text if needed.



Note: the *Left* key interaction is disabled if the `LockIn` tag is set to "yes".

Object default Softkeys (6867i)

Six customizable softkeys are available for this object.

Position	Label	Interaction	URIs
4	Done	Exit: Redisplays the previous XML object present in the phone browser.	SoftKey:Exit

Object default Softkeys (6869i)

Eight customizable softkeys are available for this object.

Position	Label	Interaction	URIs
5	Done	Exit: Redisplays the previous XML object present in the phone browser.	SoftKey:Exit

The following figure details how the AastraIPPhoneFormattedTextScreen is implemented on the Mitel 6867i.

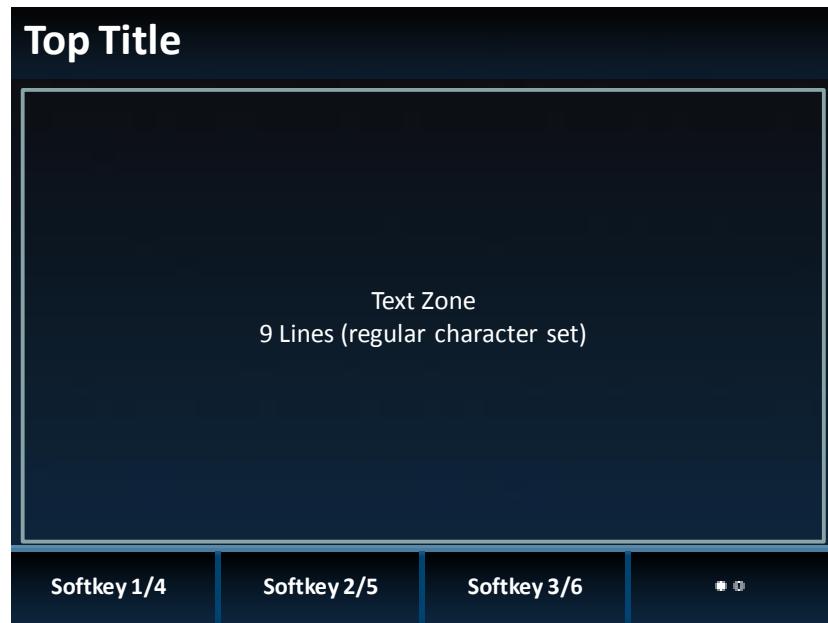


Figure 46: FormattedTextScreen implementation on 6867i

Native Interaction

- “SoftKey:Exit”

3.4.3 IMPLEMENTATION (6739I)

The text zone is divided into 3 distinct blocks, any of which can be empty.

The first block (header zone) is displayed at the top of the display and contains static text. This block takes up as many lines as the XML object specifies and can range from 0 up to the size of the physical screen.

The next block (scrolling zone), displayed below the first block, displays scrolling text and takes up as many lines as available, the size of the scrolling zone is automatically determined by using what's left of the display between the header zone and the footer zone.

The final block (footer zone) contains static text and will take up whatever lines are left on the screen starting from the bottom.



Figure 47: FormattedTextScreen layout on 6739i

The key is mapped to the cancelAction tag, if not specified the XML object is destroyed.

The keys allow up and down scrolling in order to display the complete text if needed.

Ten customizable softkeys are available for this object, there is no default softkey.



Note: the key interaction is disabled if the LockIn tag is set to “yes”.

Object default Softkeys

Ten customizable softkeys are available for this object.

Position	Label	Interaction	URIs
10	Done	Exit: Redisplays the previous XML object present in the phone browser.	SoftKey:Exit

The following figure details how the `AastraIPPhoneFormattedTextScreen` is implemented on the Mitel 6739i.



Figure 48: FormattedTextScreen implementation on 6739i

Native Interaction

- “SoftKey:Exit”

3.4.4 XML DESCRIPTION

“Red” tags indicates that the tag does not apply to all phones, when not supported the tags are just ignored.

```
<AastraIPPhoneFormattedTextScreen
    destroyOnExit = "yes/no"
    cancelAction = "some URI"
    doneAction = "some URI"
    Beep = "yes/no"
    Timeout = "some integer"
    allowAnswer = "yes/no"
    allowDrop = "yes/no"
    allowXfer = "yes/no"
    allowConf = "yes/no"
    LockIn = "yes/no"
    GoodbyeLockInURI = "some URI"
    allowDTMF = "yes/no"
    scrollUp = "some URI"
    scrollDown = "some URI"
    scrollLeft = "some URI"
    scrollRight = "some URI"
>
    <TopTitle      icon="icon index"
                    Color="white/black/red/green/brown/blue/magenta
                           cyan/lightgray/darkgray/lightred/lightgreen
                           yellow/lightblue/lightmagenta/lightcyan"
        >Top Title</TopTitle>
    <Line      Size="small/normal/double/large"
                Align="left/center/right"
                Color="white/black/red/green/brown/blue/magenta
                       cyan/lightgray/darkgray/lightred/lightgreen
                       yellow/lightblue/lightmagenta/lightcyan"
        >A line of static text</Line>
```

```

<!--Additional Lines may be added -->
<Scroll Height="integer">
    <Line Size="small/normal/double/large"
          Align="left/center/right"
          Color="white/black/red/green/brown/blue/magenta
                 cyan/lightgray/darkgray/lighter
                 lightgreen/yellow/lightblue/lightmagenta
                 lightcyan"
        >Scrolling text</Line>
    <!--Additional Lines may be added -->
</Scroll>
<Line   Size="small/normal/double/large"
       Align="left/center/right"
       Color="white/black/red/green/brown/blue/magenta
              cyan/lightgray/darkgray/lightred/lightgreen
              yellow/lightblue/lightmagenta/lightcyan"
        >Some static footer text</Line>
<!--Additional Lines may be added -->
<Dial  line="SIP line">Number to dial</Dial>
<!--Additional Softkey Items may be added -->
</AastraIPPhoneFormattedTextScreen>

```

Notes:



- Any lines that would display past the bottom of the screen will be ignored.
 - Text will not display with the top or bottom cut off.
 - Text that extends past the edge of the screen will be cropped to the last fully displayed word.
-

XML Document Objects

Document Object	Position	Type	Comments
AastralIPPhoneFormattedTextScreen	Root tag	Mandatory	Root object
destroyOnExit	Root tag	Optional	“yes/no” indicates if the object is kept or not in the phone browser after exit. If not specified, the object is kept in the browser.
cancelAction	Root tag	Optional	Defines the URI to be called when the user cancels the XML object.
doneAction	Root tag	Optional	Defines the URI to be called when the user selects the “Done” softkey or ‘SoftKey:Exit’.
Beep	Root tag	Optional	“yes” or “no” to indicate if a notification beep must be generated by the phone.
Timeout	Root tag	Optional	Overrides the default 45 seconds timeout of the UI XML object. A Timeout set to “0” will disable the timeout feature. See section 4.10.2 for more details

Document Object	Position	Type	Comments
LockIn	Root tag	Optional	If set to "yes", the phone ignores all events that would cause the screen to exit without using the keys defined by the object. Default value is "no". See section 4.10.3 for more details.
GoodbyeLockInURI	Root tag	Optional	Valid only if LockIn="yes", this tag defines a URI to be called when the "Goodbye" key is pressed during a locked XML session. This URI overrides the native behavior of the "Goodbye" key which is to destroy the current XML object displayed.
allowAnswer	Root tag	Optional	This tag applies only to the non-softkey phones. If set to "yes", the phone will display "Ignore" and "Answer" if the XML object is displayed when the phone is in the ringing state. Default value is "no". See section 6.3 for more details. <i>Only for 6730i, 6731i, 53i, 6739i, 9143i, 6863i, 6865i</i>
allowDrop	Root tag	Optional	This tag applies only to the non-softkey phones. If set to "yes", the phone will display "Drop" if the XML object is displayed when the phone is in the connected state. Default value is "no". See section 6.4 for more details. <i>Only for 6730i, 6731i, 53i, 6739i, 9143i, 6863i, 6865i</i>
allowXfer	Root tag	Optional	This tag applies only to the non-softkey phones. If set to "yes", the phone will display "Xfer" if the XML object is displayed when the phone is in the connected state. Default value is "no". See section 6.4 for more details. <i>Only for 6730i, 6731i, 53i, 6739i, 9143i, 6863i, 6865i</i>
allowConf	Root tag	Optional	This tag applies only to the non-softkey phones. If set to "yes", the phone will display "Conf" if the XML object is displayed when the phone is in the connected state. Default value is "no". See section 6.4 for more details. <i>Only for 6730i, 6731i, 53i,</i>

Document Object	Position	Type	Comments
			<i>6739i, 9143i, 6863i, 6865i</i>
allowDTMF	Root tag	Optional	This tag allows letting keypad strokes as DTMF when the phone is in the connected status.
scrollUp	Root tag	Optional	This tag allows overriding the default behavior of the Up arrow key once the scrolling reaches an end. <i>Not available on 6739i</i>
scrollDown	Root tag	Optional	This tag allows overriding the default behavior of the Down arrow key once the scrolling reaches an end. <i>Not available on 6739i</i>
scrollLeft	Root tag	Optional	This tag allows overriding the default behavior of the Left arrow key once the scrolling reaches an end. <i>Not available on 6739i</i>
scrollRight	Root tag	Optional	This tag allows overriding the default behavior of the Right arrow key once the scrolling reaches an end. <i>Not available on 6739i</i>
TopTitle	Body	Optional	Text to be used as top title for the object <i>6867i, 6869i and 6739i only.</i>
Icon	TopTitle tag	Optional	Index of the icon to be used for the top title <i>6867i, 6869i and 6739i only.</i>
Color	TopTitle tag	Optional	Label color, the possible values are: “white”, “black”, “red”, “green”, “brown”, “blue”, “magenta”, “cyan”, “lightgray”, “darkgray”, “lightred”, “lightgreen”, “yellow”, “lightblue”, “lightmagenta”,

Document Object	Position	Type	Comments
			"lightcyan" If not specified the default value is "white". <i>6867i, 6869i and 6739i only</i>
Line	Body	Optional	Text to be displayed on the line. If the text is larger than the display, line is cropped to the last word.
Size	Line tag	Optional	Size of the font for the line: "small" for the small font "normal" for the regular font, "double" for the larger font. "large" for the largest font. "normal" is the default value if not specified. <i>"small" and "large" are available only on 6739i</i>
Align	Line tag	Optional	Alignment of the line, "left", "right" or "center". If not specified the default value is "left".
Color	Line tag	Optional	Color of the line, the possible values are: "white", "black", "red", "green", "brown", "blue", "magenta", "cyan", "lightgray", "darkgray", "lightred", "lightgreen", "yellow", "lightblue", "lightmagenta", "lightcyan" If not specified the default value is "white". <i>6867i, 6869i and 6739i only</i>
Scroll	Body	Optional	Defines the scrolling section of the display.
Height	Scroll tag	Optional	Specifies the height of the scroll zone. If not specified, the phone uses the remaining lines of the physical screen and does not allow footer

Document Object	Position	Type	Comments
			lines.
Line	Scroll Body	Optional	Text to be displayed on the line in the scrolled zone. If the text is larger than the display, line is cropped to the last word.
Size	Line tag	Optional	Size of the font for the line: “small” for the small font “normal” for the regular font, “double” for the larger font. “large” for the largest font. “normal” is the default value if not specified. <i>“small” and “large” are available only on 6739i</i>
Align	Line tag	Optional	Alignment of the scrolled line, “left”, “right” or “center”. If not specified the default value is “left”.
Color	Line tag	Optional	Color of the line, the possible values are: “white”, “black”, “red”, “green”, “brown”, “blue”, “magenta”, “cyan”, “lightgray”, “darkgray”, “lightred”, “lightgreen”, “yellow”, “lightblue”, “lightmagenta”, “lightcyan” If not specified the default value is “white”. <i>6867i, 6869i and 6739i only</i>
Dial	Body	Optional	Defines what number will be dialed when an offhook action is performed on the phone or if the “Dial2” custom softkey is pressed <i>6863i, 6865i, 6867i and 6869i only</i>
line	Dial tag	Optional	Defines which SIP line to use when the Dial command is

Document Object	Position	Type	Comments
			executed. If omitted, the Dial command is performed using the first available SIP line. <i>6863i, 6865i, 6867i and 6869i only</i>
SoftKey	Body	Optional	See section 4.1 for details Not available on non softkey phones

Limitations on the non softkey phones

- Custom Softkeys are not supported
- Only 2 lines are available to display the object.
- A double size line on line 1 does not allow any scrolling
- The scroll height can not be more than 2.

3.4.5 EXAMPLES

XML Example 1 (non softkey phones)

```
<AastraIPPhoneFormattedTextScreen destroyOnExit = "yes">
    <Scroll Height="2">
        <Line>Line 1</Line>
        <Line>Line 2</Line>
        <Line Size="double">Line 3</Line>
        <Line>Line 4</Line>
        <Line>Line 5</Line>
    </Scroll>
    <Line Align="center">Footer</Line>
</AastraIPPhoneFormattedTextScreen>
```

Resulting Screen



Figure 49: FormattedTextScreen Example 1 (non softkey phones)

XML Example 2 (softkey phones)

```
<AastraIPPhoneFormattedTextScreen destroyOnExit = "yes">
    <Line Size="double" Align="center">Formatted Screen</Line>
    <Scroll Height="2">
        <Line>Scrolling text1</Line>
        <Line>Scrolling text2</Line>
        <Line>Scrolling text3</Line>
        <Line>Scrolling text4</Line>
        <Line>Scrolling text5</Line>
    </Scroll>
    <Line Align="center">Footer</Line>
</AastraIPPhoneFormattedTextScreen>
```

Resulting Screen

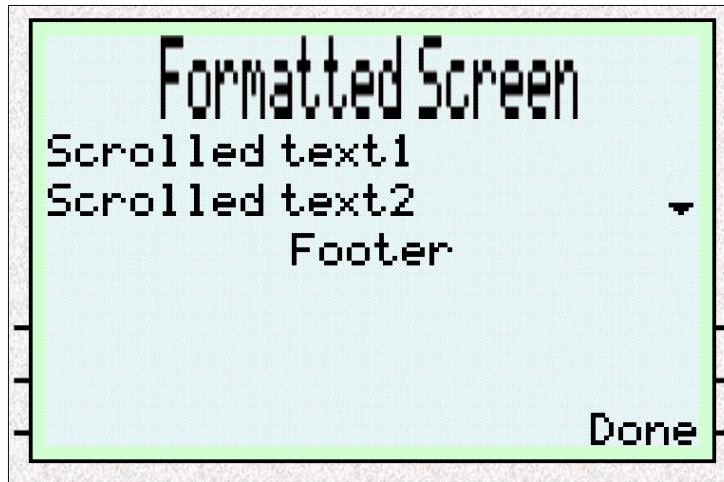


Figure 50: FormattedTextScreen Example 2 (softkey phones)

XML Example 3

In this example, there is no need for scrolling.

```
<AastraIPPhoneFormattedTextScreen destroyOnExit="yes">
    <Line Size="large" Align="center" Color="red">Header Line</Line>
    <Scroll>
        <Line>Scrolled Line 1</Line>
        <Line>Scrolled Line 2</Line>
        <Line>Scrolled Line 3</Line>
        <Line>Scrolled Line 4</Line>
        <Line>Scrolled Line 5</Line>
    </Scroll>
    <Line Size="double" Align="center" Color="blue">Footer Line</Line>
</AastraIPPhoneFormattedTextScreen>
```

Resulting Screen

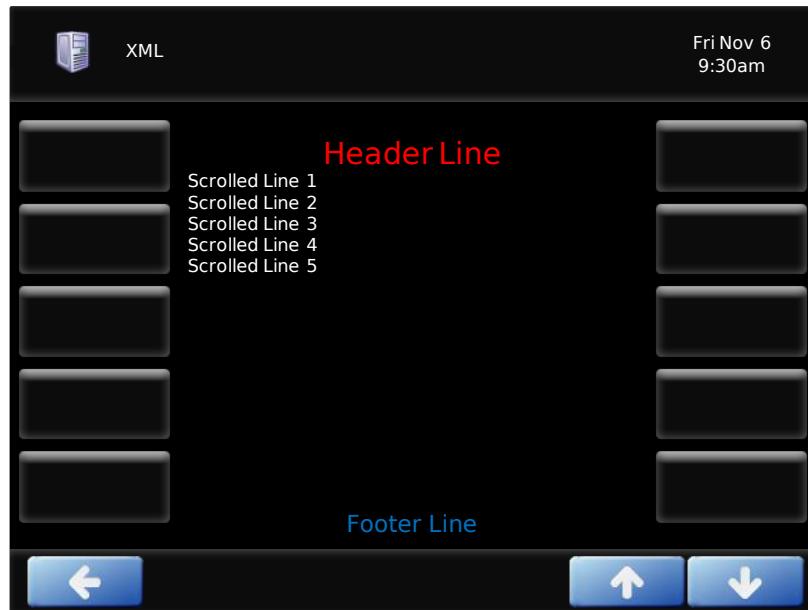


Figure 51: FormattedTextScreen Example 3 (6739i)

XML Example 4

In this example, scrolling is needed.

```

<AastraIPPhoneFormattedTextScreen destroyOnExit="yes">
    <Line Size="large" Align="center" Color="red">FormattedTextScreen</Line>
    <Line Size="large" Align="center" Color="red">Header Line</Line>
    <Scroll>
        <Line>Scrolled Line 1</Line>
        <Line>Scrolled Line 2</Line>
        <Line>Scrolled Line 3</Line>
        <Line>Scrolled Line 4</Line>
        <Line>Scrolled Line 5</Line>
        <Line>Scrolled Line 6</Line>
        <Line>Scrolled Line 7</Line>
        <Line>Scrolled Line 8</Line>
        <Line>Scrolled Line 9</Line>
        <Line>Scrolled Line 10</Line>
    </Scroll>
    <Line Size="double" Align="center" Color="blue">FormattedTextScreen</Line>
    <Line Size="double" Align="center" Color="blue">Footer Line</Line>
</AastraIPPhoneFormattedTextScreen>

```

Resulting Screen

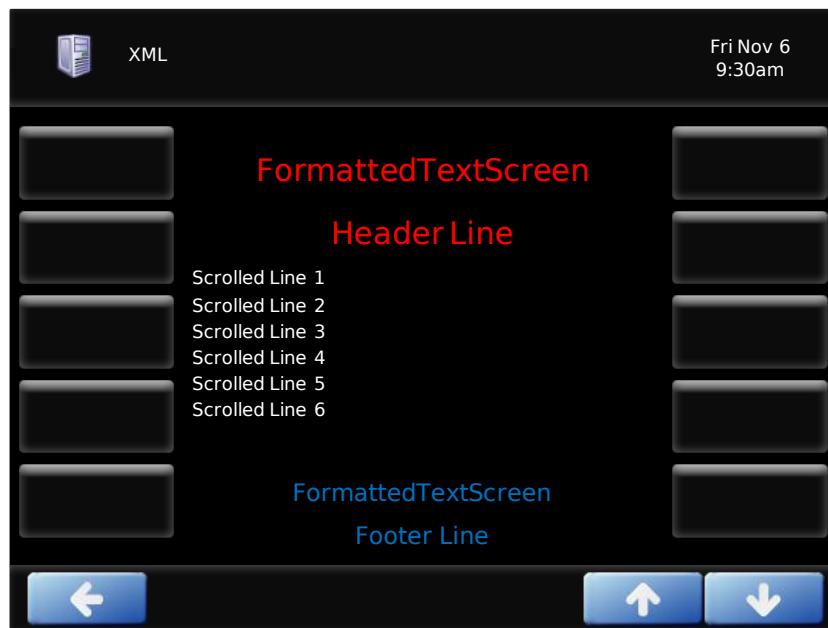


Figure 52: FormattedTextScreen Example 4 (6739i)

3.5 IMAGESCREEN OBJECT (55i/57i/57iCT/6735i/6737i/6867i/6869i/6739i)

The `ImageScreen` object can be used to display single image (bitmap for the 55i/57i/57iCT/6735i/6737i, jpeg or png file for 6867i, 6869i and 6739i).

The user can specify where the image should be placed by setting horizontal and vertical alignment of the upper left hand corner, along with the height and width of the image.

3.5.1 IMPLEMENTATION (55i/57i/57iCT/6735i/6737i)

The image itself is specified as a series of hexadecimal characters. See chapter 4.2.1.1 for more details.

Note: With firmware 4.1.0 the image size is limited to 144x40 pixels.

Object native interaction

- **Done** Redisplays the previous XML object present in the phone browser.

Object default Softkeys (softkey phones)

Position	Label	Description	URIs
6	Done	Redisplays the previous XML object present in the phone browser.	SoftKey:Exit

Note:

- the Left Arrow key default interaction is disabled if the `LockIn` tag is set to "yes".
 - the Left Arrow key default interaction can be modified using the `cancelAction` tag on a non-softkey phone.
→
 - If the `LockIn` tag is set to "yes" and the `cancelAction` tag is configured, pressing the Left Arrow key triggers the configured `cancelAction`.
 - the Right arrow key default interaction can be modified using the `doneAction` tag on a non-softkey phone.
 - The up, down, left and right arrow key default interactions can be overridden using the `scrollUp`, `scrollDown`, `scrollLeft` and `scrollRight` tags.
-

3.5.2 IMPLEMENTATION (6867i/6869i)

For the 6867i and 6869i, the image is either a 24/32 bit depth "png" or a "jpeg" file located on a server and which can be downloaded by the phone using TFTP, FTP, HTTP or HTTPS. See chapter 4.2.1.2 for more details.

Two image sizes are supported:

6867i

- Up to 320x184 pixels (mode=regular or extended).
- Up to 320x240 pixels (mode=fullscreen). In that case, the softkeys are not displayed.

6869i

- Up to 480x204 pixels (mode=regular or extended).
- Up to 480x272 pixels (mode=fullscreen). In that case, the softkeys are not displayed

If the image is bigger than the size supported by the requested mode, the image is clipped based on the requested alignment.

If the image is smaller than the size supported by the requested mode, the image is displayed based on the requested alignment

The **Left** key is mapped to the cancelAction tag, if not specified the XML object is destroyed.

Note:

- the Left Arrow key default interaction is disabled if the `LockIn` tag is set to "yes".
 - If the `LockIn` tag is set to "yes" and the `cancelAction` tag is configured, pressing the Left Arrow key triggers the configured `cancelAction`.
 - The up, down, left and right arrow key default interactions can be overridden using the `scrollUp`, `scrollDown`, `scrollLeft` and `scrollRight` tags.
-

Object default Softkeys (6867i)

Six (four physical) customizable softkeys are available for this object.

Position	Label	Interaction	URIs
4	Done	Exit: Redisplays the previous XML object present in the phone browser.	SoftKey:Exit

Object default Softkeys (6869i)

Eight (five physical) customizable softkeys are available for this object.

Position	Label	Interaction	URIs
5	Done	Exit: Redisplays the previous XML object present in the phone browser.	SoftKey:Exit

The following figure details how the `AastraIPPhoneImageScreen` is implemented on the Mitel 6867i.



Figure 53: ImageScreen 6867i implementation (mode regular/extended)

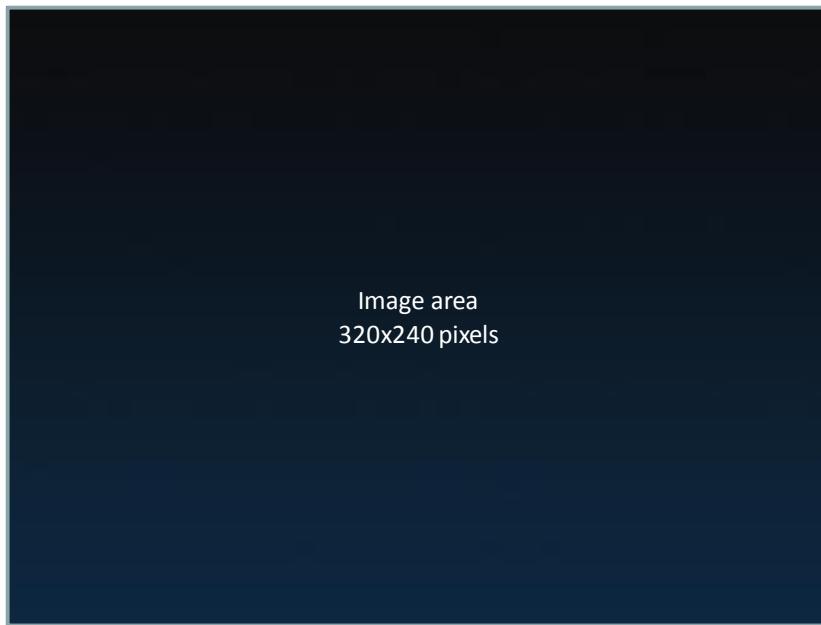


Figure 54: ImageScreen 6867i implementation (fullscreen mode)

Also a URI can be programmed to be called when the user presses the **Select** key (imageAction root tag). If this tag is empty, phone will use the URI configured by the doneAction tag (SoftKey:Exit by default).

So by default pressing the **Select** key destroys the current XML object unless an imageAction or a doneAction is configured.

Native Interaction

- “SoftKey:Exit”

3.5.3 IMPLEMENTATION (6739i)

For the 6739i, the image is either a 24 bit depth “png” or a “jpeg” file located on a server and which can be downloaded by the phone using TFTP, FTP, HTTP or HTTPS. See chapter 4.2.1.2 for more details.

Three image sizes are supported:

- 380x340 pixels (mode=regular).
- 640x340 pixels (mode=extended). In that case, the softkeys are not displayed.
- 640x480 pixels (mode=fullscreen). In that case, the softkeys are not displayed.

The key is mapped to the cancelAction tag, if not specified the XML object is destroyed.

Ten customizable softkeys are available for this object, there is no default softkey.

Note: the key interaction is disabled if the LockIn tag is set to “yes”.

Object default Softkeys

Ten customizable softkeys are available for this object.

Position	Label	Interaction	URIs
10	Done	Exit: Redisplays the previous XML object present in the phone browser.	SoftKey:Exit

The following figure details how the AastraIPPhoneImageScreen is implemented on the Mitel 6739i.



Figure 55: ImageScreen 6739i implementation (normal mode)



Figure 56: ImageScreen 6739i implementation (extended mode)

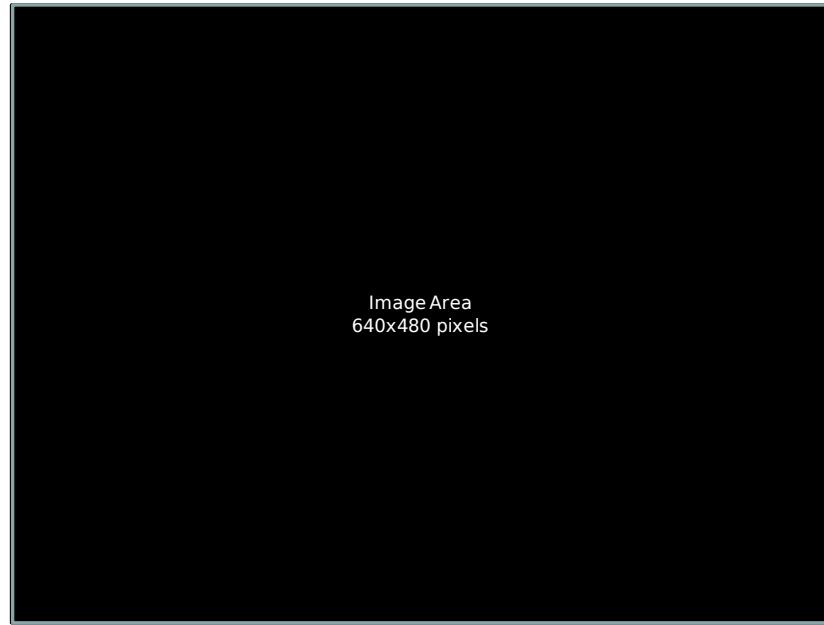


Figure 57: ImageScreen 6739i implementation (fullscreen mode)

Also a URI can be programmed to be called when the user presses on the displayed image (imageAction root tag). If this tag is empty, phone will use the URI configured by the doneAction tag (SoftKey:Exit by default).

So by default pressing on the image destroys the current XML object unless an imageAction or a doneAction is configured.

Native Interaction

- “SoftKey:Exit”

3.5.4 XML DESCRIPTION

"Red" tags indicates that the tag does not apply to all phones, when not supported the tags are just ignored.

```

<AastraIPPhoneImageScreen
    destroyOnExit = "yes/no"
    cancelAction = "some URI"
    doneAction = "some URI"
    imageAction = "some URI"
    Beep = "yes/no"
    Timeout = "some integer"
    LockIn = "yes/no"
    GoodbyeLockInURI = "some URI"
    allowDTMF = "yes/no"
    scrollUp = "some URI"
    scrollDown = "some URI"
    scrollLeft = "some URI"
    scrollRight = "some URI"
    mode = "regular/extended/fullscreen"
    >
        <TopTitle      icon="icon index"
                        Color="white/black/red/green/brown/blue/magenta
                                cyan/lightgray/darkgray/lightred/lightgreen
                                yellow/lightblue/lightmagenta/lightcyan"
                    >Top Title</TopTitle>
        <Image
            verticalAlign = "top,middle,bottom"
            horizontalAlign = "left,middle,right"
            height = "height in pixels"
            width = "width in pixels"
            >Image as hexadecimal characters or URL</Image

```

XML Document Objects

Document Object	Position	Type	Comments
AastralIPPhoneImageSc reen	Root tag	Mandatory	Root object
destroyOnExit	Root tag	Optional	"yes/no" indicates if the object is kept or not in the phone browser after exit. If not specified, the object is kept in the browser.
cancelAction	Root tag	Optional	Defines the URI to be called when the user cancels the XML object.
doneAction	Root tag	Optional	Defines the URI to be called when the user selects the "Done" softkey or 'SoftKey:Exit'.
imageAction	Root tag	Optional	Defines the URI to be called when the user presses on the image (6739i) or presses Select on 6867i, 6869i. 6867i, 6869i and 6739i

Document Object	Position	Type	Comments
			only.
Beep	Root tag	Optional	"yes" or "no" to indicate if a notification beep must be generated by the phone.
Timeout	Root tag	Optional	Overrides the default 45 seconds timeout of the UI XML object. A Timeout set to "0" will disable the timeout feature. See section 4.10.2 for more details
LockIn	Root tag	Optional	If set to "yes", the phone ignores all events that would cause the screen to exit without using the keys defined by the object. Default value is "no". See section 4.10.3 for more details.
GoodbyeLockInURI	Root tag	Optional	Valid only if LockIn="yes", this tag defines a URI to be called when the "Goodbye" key is pressed during a locked XML session. This URI overrides the native behavior of the "Goodbye" key which is to destroy the current XML object displayed.
allowDTMF	Root tag	Optional	This tag allows letting keypad strokes as DTMF when the phone is in the connected status.
scrollUp	Root tag	Optional	This tag allows overriding the default behavior of the Up arrow key. <i>Ignored on 6739i</i>
scrollDown	Root tag	Optional	This tag allows overriding the default behavior of the Down arrow key. <i>Ignored on 6739i</i>
scrollLeft	Root tag	Optional	This tag allows overriding the default behavior of the Left arrow key. <i>Ignored on 6739i</i>
scrollRight	Root tag	Optional	This tag allows overriding the default

Document Object	Position	Type	Comments
			behavior of the Right arrow key. <i>Ignored on 6739i</i>
mode	Root tag	Optional	Configures the display mode, “regular”, “extended” or “fullscreen” <i>6867i, 6869i and 6739i only</i>
TopTitle	Body	Optional	Text to be used as top title for the object <i>6867i, 6869i and 6739i only.</i>
Icon	TopTitle tag	Optional	Index of the icon to be used for the top title <i>6867i, 6869i and 6739i only.</i>
Color	TopTitle tag	Optional	Label color, the possible values are: “white”, “black”, “red”, “green”, “brown”, “blue”, “magenta”, “cyan”, “lightgray”, “darkgray”, “lightred”, “lightgreen”, “yellow”, “lightblue”, “lightmagenta”, “lightcyan” If not specified the default value is “white”. <i>6867i, 6869i and 6739i only</i>
Image	Body	Mandatory	Image to be displayed as a series of hexadecimal characters (55i/57i/57iCT/6735i/6737i) or URL to get the png file. See section 4.2.1 for more details.
verticalAlign	Image tag	Optional	Vertical position of the image (“top”, “middle” or “bottom”). If the tag is not specified, the object will use “middle” as a

Document Object	Position	Type	Comments
			default value.
horizontalAlign	Image tag	Optional	Horizontal position of the image (“left”, “middle” or “right”). If the tag is not specified, the object will use “middle” as a default value.
Height	Image tag	Mandatory	Height in pixels. Must match the image height. (not on 6867i, 6869i) <i>Optional and Ignored on 6867i and 6869i</i>
Width	Image tag	Mandatory	Width in pixels. Must match the image width. (not on 6867i, 6869i) <i>Optional and Ignored on 6867i, 6869i</i>
SoftKey	Body	Optional	See section 4.1 for details

3.5.5 EXAMPLES

XML Example (55i/57i/57iCT)

```
<AastraIPPhoneImageScreen destroyOnExit="yes">
<Image
width="40" height="40"
>ffffffffc02fffffe4ffffbffffc05ffffe7ff7a7fffffffffeebd7fffffea6bcf
fffffe796f3feff6fa289f0a86f4866fa20df42414595dd0134f8037ed1637f0e2522b2dd003b6eb
936f05ffffbd4f4107bba6eb0080e93715000010b754001281271408c640252081b1b22500013c5c
66201368004e04467520dc11067152b82094d418e10024720580549478010500260153002093140
0020ac5c91088b0f2b08c21c07d0c2006009fdfe81f80efe0107fe0fb1c3ffff8ffc3ffffef8f7fe
bffbfccf87ffbfff64</Image>
<SoftKey index="1" icon="1">
<Label>Mail</Label>
<URI>http://myserver.com/script.php?action=1</URI>
</SoftKey>
<SoftKey index="6">
<Label>Exit</Label>
<URI>SoftKey:Exit</URI>
</SoftKey>
<IconList>
<Icon index="1">Icon:Envelope</Icon>
</IconList>
</AastraIPPhoneImageScreen>
```

Resulting Screen



Figure 58: ImageScreen Example (55i/57i/57iCT/6735i/6737i)

XML Example (6739i)

```
<AastraIPPhoneImageScreen destroyOnExit="yes">
<Image height="64" width="380">http://myserver.com/images/mitel.png</Image>
<SoftKey index="1" icon="1">
<Label>Mail</Label>
<URI>http://myserver.com/script.php?action=1</URI>
</SoftKey>
<SoftKey index="10">
<Label>Exit</Label>
<URI>SoftKey:Exit</URI>
</SoftKey>
<IconList>
<Icon index="1">Icon:Envelope</Icon>
</IconList>
</AastraIPPhoneImageScreen>
```

Resulting Screen



Figure 59: ImageScreen Example (6739i)

[3.6 INPUTSCREEN OBJECT – SINGLE INPUT FIELD \(ALL MODELS\)](#)

The InputScreen object allows developers to create a screen capable of gathering user input. The Mitel IP phones support seven input types:

- IP Addresses,
- Numbers (integers plus * and #),
- Strings,
- Dates (US and international format)

- Time (US and international format)

Each parameter has a URL tag that is used to send information back to the HTTP server. The label in the parameter tag is appended to the address in the URL tag and sent via HTTP GET.

3.6.1 IMPLEMENTATION (NON SOFTKEY AND SOFTKEY PHONES)

Object native interactions

- **Done/Submit** Completes the user input by submitting the programmed URI and value
- **Cancel** Redisplays the previous XML object present in the phone browser.

Non softkey phone keys

The object is displayed on two lines, one line for the prompt message and one line for the input field, the title is not displayed.

Line selected	Label	Keys
Input field	^Cancel	Up Arrow Exit
	vDone	Down Arrow Done
		Right Arrow Next Character
		Left Arrow Previous Character
		prgkey2 (Delete) Backspace

Note:



- the Up Arrow key interaction is disabled if the `LockIn` tag is set to "yes".
- the Up Arrow key interaction can be modified using the `cancelAction` tag.

Softkey phone keys

Line selected	Keys
Input field	Right Arrow Next Character
	Left Arrow Previous Character

55i/57i/57iCT/9480i/9480iCT/6735i/6737i Common default Softkeys

Position	Label	Description	URIs
5	Done	Completes the user input by submitting the programmed URI and value.	SoftKey:Submit
6	Cancel	Redisplays the previous XML object present in the phone browser. Not available if <code>LockIn</code> set to "yes".	SoftKey:Exit

3.6.2 IMPLEMENTATION ON THE 6867i/6869i

On the 6867i/6869i, the input is very similar to the softkey phones.

The **Left/Right** keys are used to navigate between characters in the input field.

The **Up/Down** keys allow up and down scrolling in order to display the previous/next input field.

The **Select** key is mapped to the doneAction tag (Submit by default).

Object native interaction

- **Submit** (SoftKey:Submit) Completes the user input by submitting the programmed URI and value.
"SoftKey:Exit"

Common default Softkeys (6867i)

Position	Label	Description	URIs
3	Done	Completes the user input by submitting the programmed URI and value.	SoftKey:Submit
4	Cancel	Redisplays the previous XML object present in the phone browser. Not available if LockIn set to "yes".	SoftKey:Exit

Common default Softkeys (6869i)

Position	Label	Description	URIs
4	Done	Completes the user input by submitting the programmed URI and value.	SoftKey:Submit
5	Cancel	Redisplays the previous XML object present in the phone browser. Not available if LockIn set to "yes".	SoftKey:Exit



Figure 60: InputScreen implementation on 6867i

On the 6867i/6869i, like "Softkey::Submit" the URI custom softkeys are also appended with the parameter values as well as the selection, this allows to exit the InputScreen object without the validity check.

3.6.3 IMPLEMENTATION (6739i)

On the 6739i, the input for a field is done via a virtual keyboard which is displayed when the user touches the input zone; the keyboard is removed if the user touches outside of the input zone.

The  key is mapped to the cancelAction tag, if not specified the XML object is destroyed.

The  key on the virtual keyboard resets the content of the input field to its default value.

The  key on the virtual keyboard triggers the submission of the entered value.

The  key on the virtual keyboard removes the keyboard from the display.

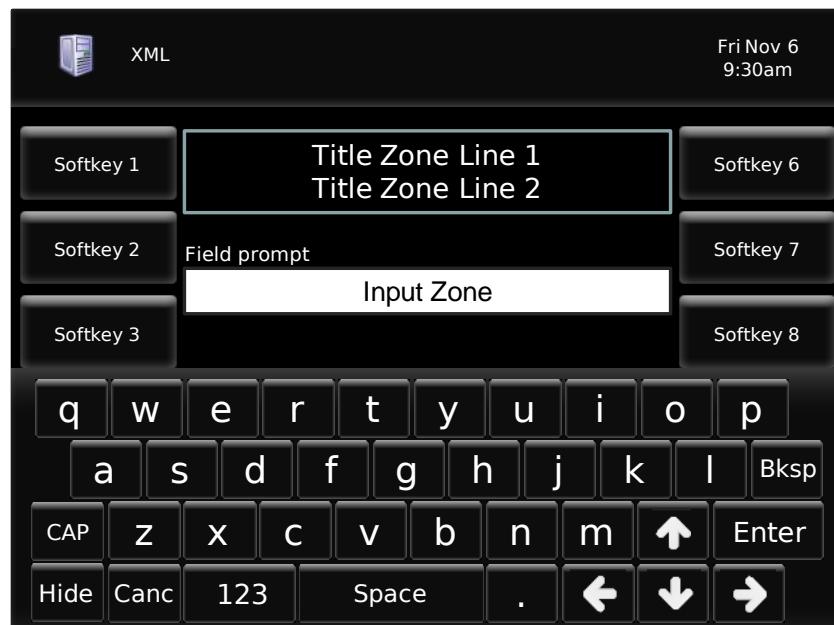


Figure 61: InputScreen implementation on 6739i

Object native interaction

- **Submit** (SoftKey:Submit) Completes the user input by submitting the programmed URI and value.
- “SoftKey:Exit”

Object default Softkeys

Ten customizable softkeys are available for this object.

Position	Label	Interaction	URIs
10	Done	Exit: Redisplays the previous XML object present in the phone browser.	SoftKey:Exit

3.6.4 XML DESCRIPTION

“Red” tags indicates that the tag does not apply to all phones, when not supported the tags are just ignored.

```

<AastralIPPhoneInputScreen
    type = "IP/string/stringN/number/timeUS/timeInt/dateUS/dateInt"
    password = "yes/no"
    editable = "yes/no"
    destroyOnExit = "yes/no"
    cancelAction = "some URI"
    Beep = "yes/no"
    Timeout = "some integer"
    allowAnswer = "yes/no"
    allowDrop = "yes/no"
    allowXfer = "yes/no"
    allowConf = "yes/no"
    defaultFocus = "yes/no"
    LockIn = "yes/no"
    GoodbyeLockInURI = "some URI"
    inputLanguage = "English / French / German / Italian / Spanish /
Portuguese/ Russian / Nordic"
>
    <Title      wrap="yes/no"
                Color="white/black/red/green/brown/blue/magenta
                cyan/lightgray/darkgray/lightred/lightgreen
                yellow/lightblue/lightmagenta/lightcyan"
        >Title string</Title>
    <TopTitle   icon="icon index"
                Color="white/black/red/green/brown/blue/magenta
                cyan/lightgray/darkgray/lightred/lightgreen
                yellow/lightblue/lightmagenta/lightcyan"
        >Top Title</TopTitle>
    <Prompt     Color="white/black/red/green/brown/blue/magenta
                cyan/lightgray/darkgray/lightred/lightgreen
                yellow/lightblue/lightmagenta/lightcyan"
        >Guidance for the input</Prompt>
    <URL>Target receiving the input</URL>
    <Parameter  Color="white/black/red/green/brown/blue/magenta
                cyan/lightgray/darkgray/lightred/lightgreen
                yellow/lightblue/lightmagenta/lightcyan"
        >name of the parameter added to URL</Parameter>
    <Default>Default Value</Default>
    <!--Additional Softkey Items may be added -->
    <!--Additional Icon Items may be added -->
</AastralIPPhoneInputScreen>

```

XML Document Objects

Document Object	Position	Type	Comments
AastralIPPhoneInputScreen	Root tag	Mandatory	Root object
type	Root tag	Optional	Specifies the type of input, possible values are "IP", "string", "stringN", "number", "timeUS", "timeInt", "dateUS", "dateInt". Default value is "string"
password	Root tag	Optional	Specifies if the input is masked by "*" characters. Default value is "no"
editable	Root tag	Optional	Specifies if the user is allowed to modify the input. Default value is "yes"
destroyOnExit	Root tag	Optional	"yes/no" indicates if the object

Document Object	Position	Type	Comments
			is kept or not in the phone browser after exit. If not specified, the object is kept in the browser.
cancelAction	Root tag	Optional	Defines the URI to be called when the user cancels the XML object.
Beep	Root tag	Optional	"yes" or "no" to indicate if a notification beep must be generated by the phone.
Timeout	Root tag	Optional	Overrides the default 45 seconds timeout of the UI XML object. A Timeout set to "0" will disable the timeout feature. See section 4.10.2 for more details
LockIn	Root tag	Optional	If set to "yes", the phone ignores all events that would cause the screen to exit without using the keys defined by the object. Default value is "no". See section 4.10.3 for more details.
GoodbyeLockInURI	Root tag	Optional	Valid only if LockIn="yes", this tag defines a URI to be called when the "Goodbye" key is pressed during a locked XML session. This URI overrides the native behavior of the "Goodbye" key which is to destroy the current XML object displayed.
defaultFocus	Root tag	Optional	If set to "yes", the input field automatically goes to edit mode (keyboard displayed). Default value is "no". <i>6739i only</i>
inputLanguage	Root tag	Optional	Defines the language character set used for the input. English by default. See section 15 for the localized key mapping.
allowAnswer	Root tag	Optional	This tag applies only to the non-softkey phones. If set to "yes", the phone will display "Ignore" and "Answer" if the XML object is displayed when the phone is in the ringing state. Default value is "no". See section 6.3 for more details. <i>Only for 6730i, 6731i, 53i, 6739i, 9143i, 6863i, 6865i.</i>
allowDrop	Root tag	Optional	This tag applies only to the non-softkey phones. If set to "yes", the phone will display "Drop" if the XML object is

Document Object	Position	Type	Comments
			displayed when the phone is in the connected state. Default value is "no". See section 6.4 for more details. <i>Only for 6730i, 6731i, 53i, 6739i, 9143i, 6863i, 6865i</i>
allowXfer	Root tag	Optional	This tag applies only to the non-softkey phones. If set to "yes", the phone will display "Xfer" if the XML object is displayed when the phone is in the connected state. Default value is "no". See section 6.4 for more details. <i>Only for 6730i, 6731i, 53i, 6739i, 9143i, 6863i, 6865i</i>
allowConf	Root tag	Optional	This tag applies only to the non-softkey phones. If set to "yes", the phone will display "Conf" if the XML object is displayed when the phone is in the connected state. Default value is "no". See section 6.4 for more details. <i>Only for 6730i, 6731i, 53i, 6739i, 9143i, 6863i, 6865i</i>
Title	Body	Optional	Text to be used as title for the object
Wrap	Title tag	Optional	If set to "yes" the title of the object will be wrapped on 2 lines. <i>Ignored on 6867i, 6869i and 6739i</i>
Color	Title tag	Optional	Label color, the possible values are: "white", "black", "red", "green", "brown", "blue", "magenta", "cyan", "lightgray", "darkgray", "lightred", "lightgreen", "yellow", "lightblue", "lightmagenta", "lightcyan"

Document Object	Position	Type	Comments
			If not specified the default value is “white”. <i>6867i, 6869i and 6739i only</i>
TopTitle	Body	Optional	Text to be used as top title for the object <i>6867i, 6869i and 6739i only.</i>
Icon	TopTitle tag	Optional	Index of the icon to be used for the top title <i>6867i, 6869i and 6739i only.</i>
Color	TopTitle tag	Optional	Label color, the possible values are: “white”, “black”, “red”, “green”, “brown”, “blue”, “magenta”, “cyan”, “lightgray”, “darkgray”, “lightred”, “lightgreen”, “yellow”, “lightblue”, “lightmagenta”, “lightcyan” If not specified the default value is “white”. <i>6867i, 6869i and 6739i only</i>
Prompt	Body	Mandatory	Text to be displayed as guidance for the user input.
Color	Prompt tag	Optional	Label color, the possible values are: “white”, “black”, “red”, “green”, “brown”, “blue”, “magenta”, “cyan”, “lightgray”, “darkgray”, “lightred”, “lightgreen”, “yellow”,

Document Object	Position	Type	Comments
			"lightblue", "lightmagenta", "lightcyan" If not specified the default value is "yellow" for 6867i, 6869i and "white" for 6739i. <i>6867i, 6869i and 6739i only</i>
URL	Body	Mandatory	URI called when user completes his input.
Parameter	Body	Mandatory	Name of the parameter to be added to the URL after input is complete.
Color	Parameter tag	Optional	Label color, the possible values are: "white", "black", "red", "green", "brown", "blue", "magenta", "cyan", "lightgray", "darkgray", "lightred", "lightgreen", "yellow", "lightblue", "lightmagenta", "lightcyan" If not specified the default value is "white" for 6867i, 6869i and "black" for 6739i. <i>6867i, 6869i and 6739i only</i>
Default	Body	Mandatory	Default value to be displayed in the input field.
SoftKey	Body	Optional	See section 4.1 for more details <i>Only on 6867i, 6869i, 6739i, 6755i, 6757i, 6757iCT, 6735i and 6737i.</i>

3.6.5 INPUT TYPE: IP

When the type is set to IP, the user input is restricted to integers only. The phone will validate the user input; if an invalid IP address is entered, nothing will be sent to the server and the user will receive an error message.

Object default Softkeys (softkey phones)

Position	Label	Description	URIs
1	Backspace	Deletes the character before the cursor in the input field.	SoftKey:BackSpace
2	Dot “.”	Inserts a “.” in the user input at the cursor position	SoftKey:Dot
5	Done	Completes the user input by submitting the programmed URI and value.	SoftKey:Submit
6	Cancel	Redisplays the previous XML object present in the phone browser. Does not appear if LockIn set to “yes”.	SoftKey:Exit

XML Example

```
<AastraIPPhoneInputScreen type = "IP">
    <Title>Proxy Server</Title>
    <Prompt>Server IP:</Prompt>
    <URL>http://10.50.10.53/script.pl</URL>
    <Parameter>proxy</Parameter>
    <Default></Default>
<AastraIPPhoneInputScreen>
```

- **Note:** In this example, when the user press “Done” or “Submit” or “Enter” on the phone after entering “192.168.0.100”, the phone will call the following URL
“http://10.50.10.53/script.pl?proxy=192.168.0.100”.

Resulting Screen (non softkey phone)



Figure 62: InputScreen “IP” Example (non softkey phone)

Resulting Screen (softkey phone)

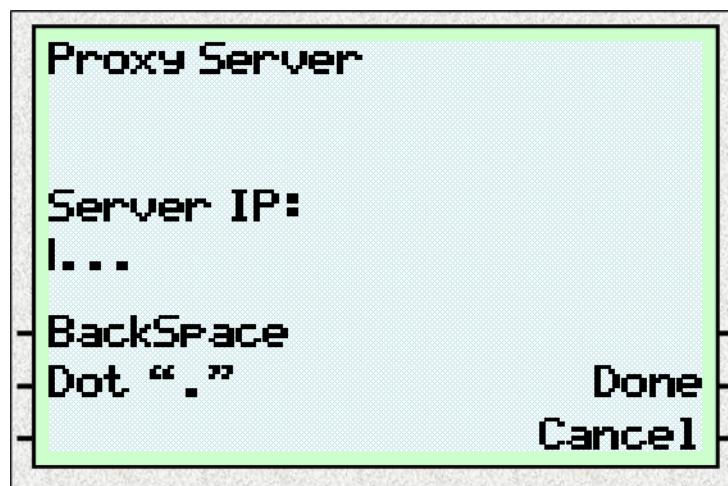


Figure 63: InputScreen “IP” Example (softkey phone)

Resulting Screen (6739i)

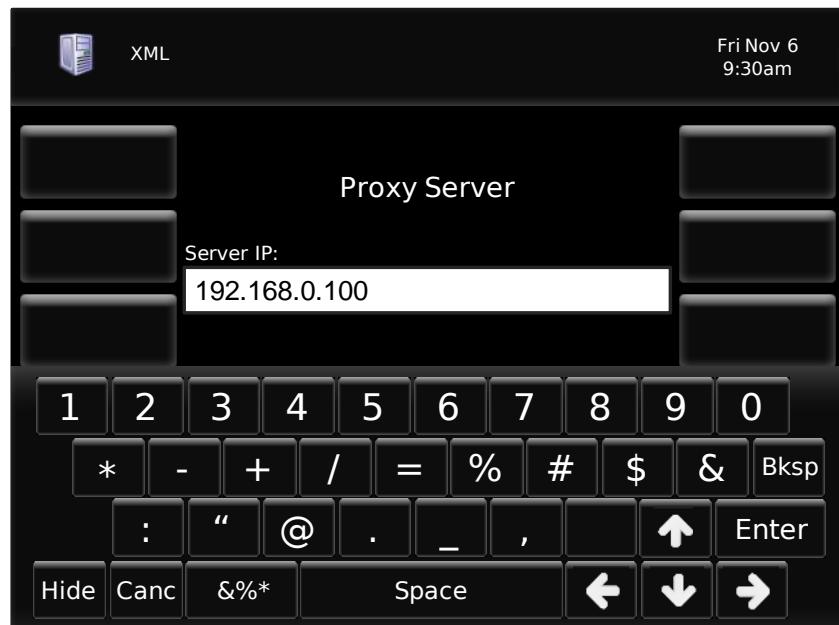


Figure 64: InputScreen “IP” Example (6739i)

3.6.6 INPUT TYPE: NUMBER

Like an IP screen, a number input screen restricts the user to numbers only. Field validation is performed on the user input.

Object default Softkeys (softkey phones)

Position	Label	Description	URIs
1	Backspace	Deletes the character before the cursor in the input field.	SoftKey:BackSpace
5	Done	Completes the user input by submitting the programmed URI and value.	SoftKey:Submit
6	Cancel	Redisplays the previous XML object present in	SoftKey:Exit

the phone browser. Does not appear if LockIn set to "yes".

XML Example

```
<AastraIPPhoneInputScreen type = "number">
    <Title>Proxy Port</Title>
    <Prompt>Port:</Prompt>
    <URL>http://10.50.10.53/script.pl</URL>
    <Parameter>port</Parameter>
    <Default>5060</Default>
<AastraIPPhoneInputScreen>
```

Resulting Screen (non softkey phone)

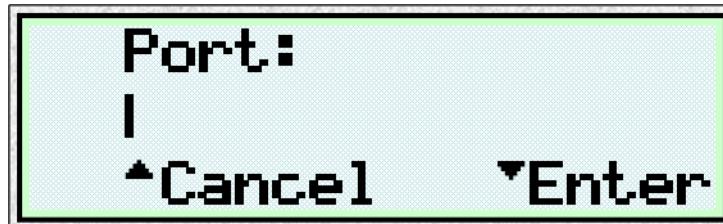


Figure 65: InputScreen “Number” Example (non softkey phone)

Resulting Screen (softkey phone)

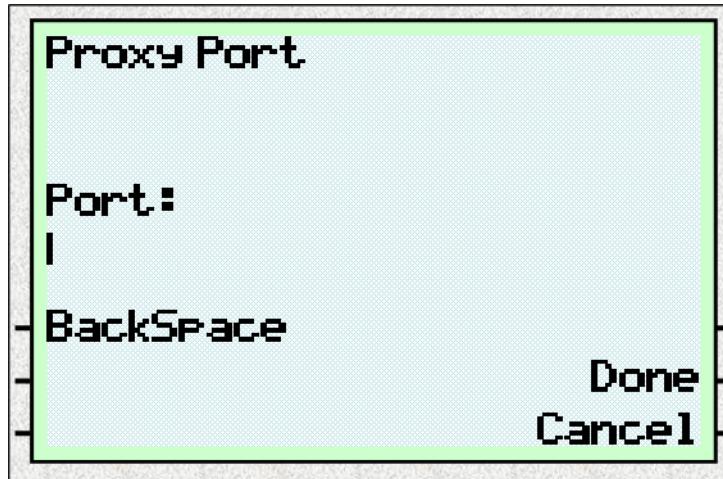


Figure 66: InputScreen “Number” Example (softkey phone)

Resulting Screen (6739i)

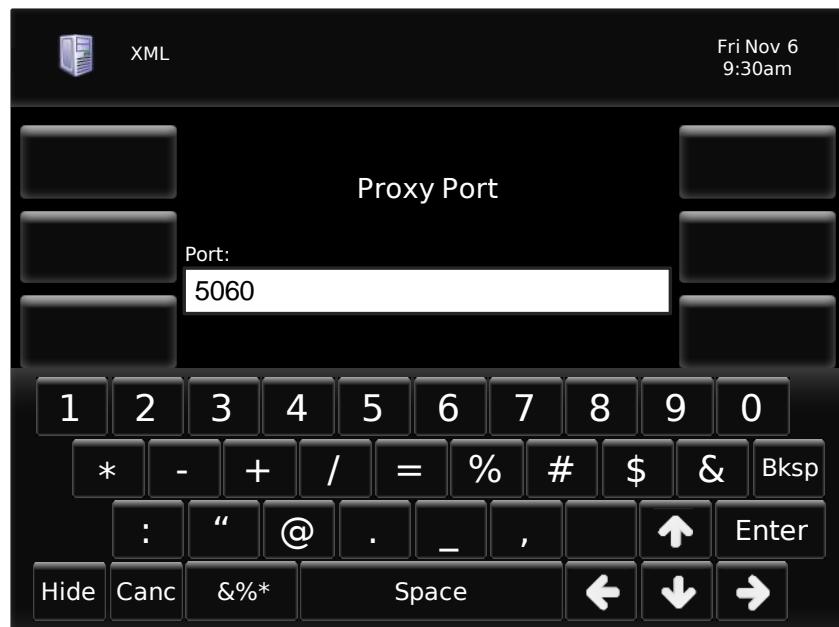


Figure 67: InputScreen “Number” Example (6739i)



Note: In this example, when the user presses “Done” or “Submit” or “Enter” on the phone after entering “5060”, the phone will call the following URL “<http://10.50.10.53/script.pl?port=5060>”.

3.6.7 INPUT TYPE: STRING OR STRINGN

When the input type is set to string, the user can enter uppercase letters, lowercase letters, symbols, and numbers.

Non softkey phone input

The user can scroll through some available input symbols

- . : ; , = _ , - ‘ & () ” \$! by pressing the 1 key repeatedly.
- # / \ @ by pressing the # key repeatedly.
- Space by pressing the * key repeatedly

Keys 2-9 scroll through the keypad letters in upper case and lower case (e.g. pressing repeatedly 2 will scroll through ABC2abc or abc2ABC if type is string and 2ABCabc or 2abcABC if type is stringN)

Softkey phone input

The input mode can be switched via the Mode Key (Upper Case, Lower Case and Digits).

The user can scroll through some available input symbols

- . : ; , = _ , - ‘ & () ” \$! by pressing the 1 key repeatedly.
- # / \ @ by pressing the # key repeatedly.
- Space by pressing the * key repeatedly

In Upper Case or Lower Case mode, keys 2-9 scroll through the keypad letters (e.g. pressing repeatedly 2 in Upper case mode will scroll through ABC2)

Object default Softkeys (softkey phones)

Position	Label	Description	URIs
1	Backspace	Deletes the character before the cursor in the input field.	SoftKey:BackSpace
2	Dot “.”	Inserts a “.” in the user input at the cursor position	SoftKey:Dot
3	ABC>	Toggle between input modes, “ABC”, “123”, “abc”. Type is “string”	SoftKey:ChangeMode
3	123>	Toggle between input modes, “123”, “ABC”, “abc”. Type is “stringN”	SoftKey:ChangeMode
4	NextSpace	Inserts a space in the user input at the cursor position	SoftKey:NextSpace
5	Done	Completes the user input by submitting the programmed URI and value.	SoftKey:Submit
6	Cancel	Redisplays the previous XML object present in the phone browser. Does not appear if LockIn set to “yes”.	SoftKey:Exit

XML Example

```
<AastraIPPhoneInputScreen  
    type = "string"  
    password = "yes">  
        <Title>SIP Settings</Title>  
        <Prompt>Enter something</Prompt>  
        <URL>http://10.50.10.53/script.pl</URL>  
        <Parameter>passwd</Parameter>  
        <Default></Default>  
<AastraIPPhoneInputScreen>
```

Resulting Screen (non softkey phone)



Figure 68: InputScreen “String” Example (non softkey phone)

Resulting Screen (softkey phone)

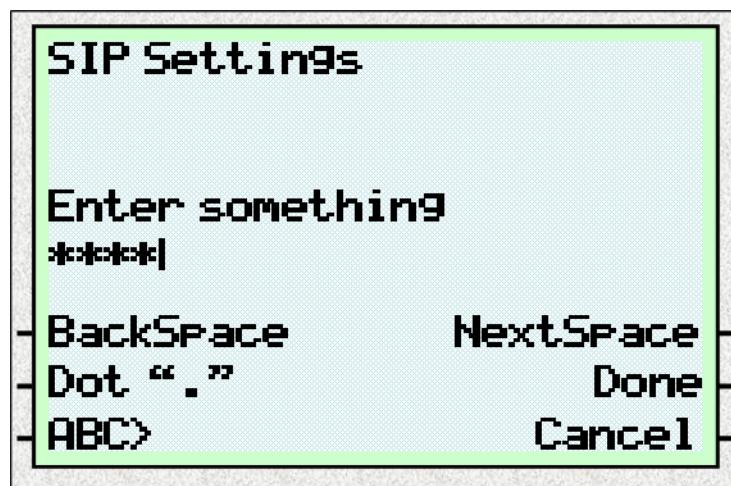


Figure 69: InputScreen “String” Example (softkey phone)

Resulting Screen (6739i)



Figure 70: InputScreen “String” Example (6739i)



Note: In this example, when the user press “Done” or “Submit” or “Enter” on the phone after entering “12345”, the phone will call the following URL “<http://10.50.10.53/script.pl?passwd=12345>”.

3.6.8 INPUT TYPE: TIMEUS

When the input type is set to “timeUS”, the user can enter a time using the US format with 12 hours cycle (HH:MM:SS AM/PM with HH from 00 to 12).

The user navigates between the various fields using the left and right navigation arrow keys, the toggle between AM and PM is done using the right navigation arrow key with the cursor positioned right before the AM/PM field.

Notes:

-
- the “password” attribute has no effect on this input type.
 - the format of the “Default” attribute must be HH:MM:SSXX
 - where XX is AM or PM, HH between 00 and 12 and MM/SS between 00 and 59.
 - If the “Default” tag is empty, the phone displays “12:00:00 AM”.
 - On the 6867i/6869i, an extra softkey “AM/PM” is also available.
-

Object default Softkeys (softkey phones)

Position	Label	Description	URIs
5	Done	Completes the user input by submitting the programmed URI and value.	SoftKey:Submit
6	Cancel	Redisplays the previous XML object present in the phone browser. Does not appear if LockIn set to “yes”.	SoftKey:Exit

XML Example

```
<AastraIPPhoneInputScreen type = "timeUS">
    <Title>Time US</Title>
    <Prompt>Enter time:</Prompt>
    <URL>http://10.50.10.53/script.pl</URL>
    <Parameter>time</Parameter>
    <Default></Default>
<AastraIPPhoneInputScreen>
```

Resulting Screen (non softkey phone)



Figure 71: InputScreen “TimeUS” Example (non softkey phone)

Resulting Screen (softkey phone)

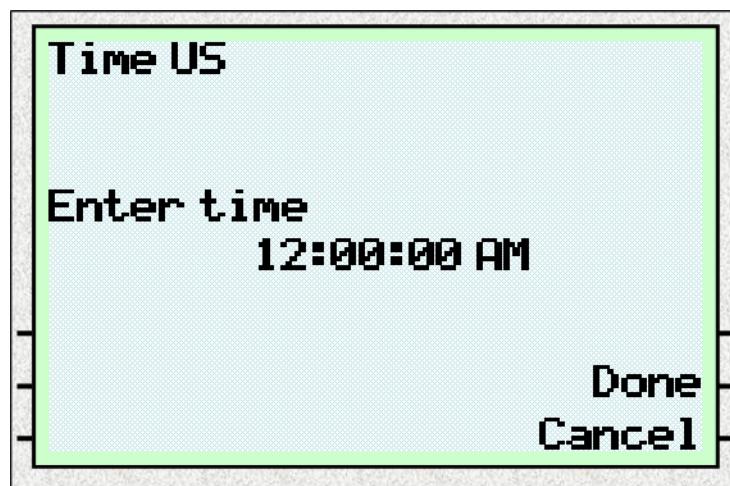


Figure 72: InputScreen “TimeUS” Example (softkey phone)

Resulting Screen (6739i)

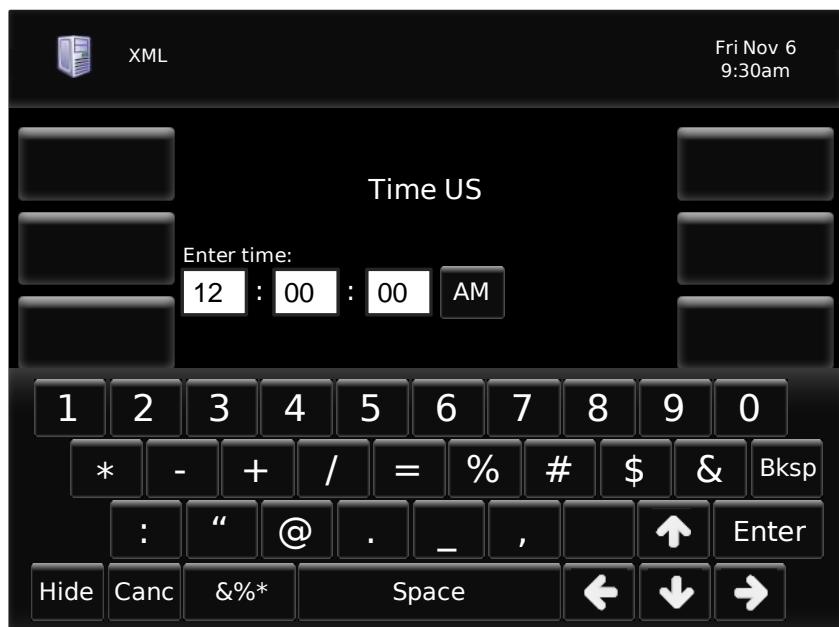


Figure 73: InputScreen “TimeUS” Example (6739i)

Note: In this example, when the user press “Done” or “Submit” or “Enter” on the phone after entering “10:20:00 AM”, the phone will call the following URL “<http://10.50.10.53/script.pl?time=10:20:00AM>” (actually the phone URL encodes the URL so the “.” character is replaced by %3A but transparent to the receiving code)

3.6.9 INPUT TYPE: TIMEINT

When the input type is set to “timeInt”, the user can enter a time using the international format with a 24 hours cycle (HH:MM:SS with HH from 00 to 23).

The user navigates between the various fields using the left and right navigation arrow keys.

Notes:

-
- the “password” attribute has no effect on this input type.
 - the format of the “Default” attribute must be HH:MM:SS with HH from 00 to 23. If the “Default” tag is empty, the phone displays “00:00:00”.
-

Object default Softkeys (softkey phone)

Position	Label	Description	URIs
5	Done	Completes the user input by submitting the programmed URI and value.	SoftKey:Submit
6	Cancel	Redisplays the previous XML object present in the phone browser. Does not appear if LockIn set to “yes”.	SoftKey:Exit

XML Example

```
<AastraIPPhoneInputScreen type = "timeInt">
  <Title>Time International</Title>
  <Prompt>Enter time:</Prompt>
  <URL>http://10.50.10.53/script.pl</URL>
  <Parameter>time</Parameter>
  <Default></Default>
<AastraIPPhoneInputScreen>
```

Resulting Screen (non softkey phone)



Figure 74: InputScreen “Timelnt” Example (*non softkey phone*)

Resulting Screen (softkey phone)



Figure 75: InputScreen “Timelnt” Example (*softkey phone*)

Resulting Screen (6739i)

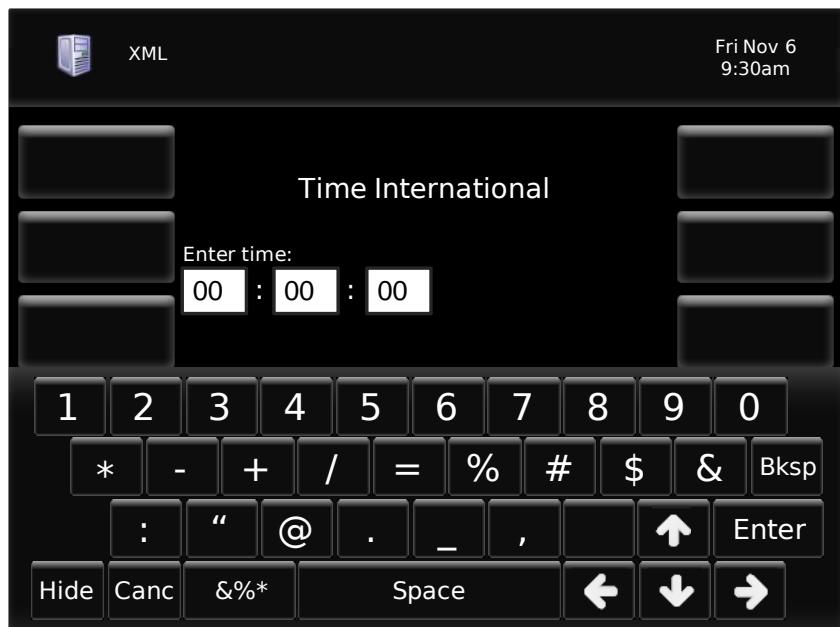


Figure 76: InputScreen “TimeInt” Example (6739i)

- Note:** In this example, when the user press “Done” or “Submit” or “Enter” on the phone after entering “14:20:00”, the phone will call the following URL <http://10.50.10.53/script.pl?time=14:20:00> (actually the phone URL encodes the URL so the “.” character is replaced by %3A but transparent to the receiving code)

3.6.10 INPUT TYPE: DATEUS

When the input type is set to “dateUS”, the user can enter a date using the US format (MM/DD/YYYY).

The user navigates between the various editable fields using the left and right navigation arrow keys.

Notes:

-
- the “password” attribute has no effect on this input type.
 - the format of the “Default” attribute must be MM/DD/YYYY. If “Default” tag is empty, today’s date is displayed.

Object default Softkeys (softkey phone)

Position	Label	Description	URIs
5	Done	Completes the user input by submitting the programmed URI and value.	SoftKey:Submit
6	Cancel	Redisplays the previous XML object present in the phone browser. Does not appear if LockIn set to “yes”.	SoftKey:Exit

XML Example

```
<AastraIPPhoneInputScreen type = "dateUS">
    <Title>Date US</Title>
    <Prompt>Enter date</Prompt>
    <URL>http://10.50.10.53/script.pl</URL>
    <Parameter>date</Parameter>
    <Default></Default>
<AastraIPPhoneInputScreen>
```

Resulting Screen (non softkey phone)



Figure 77: InputScreen “DateUS” Example (*non softkey phone*)

Resulting Screen (softkey phone)



Figure 78: InputScreen “DateUS” Example (*softkey phone*)

Resulting Screen (6739i)

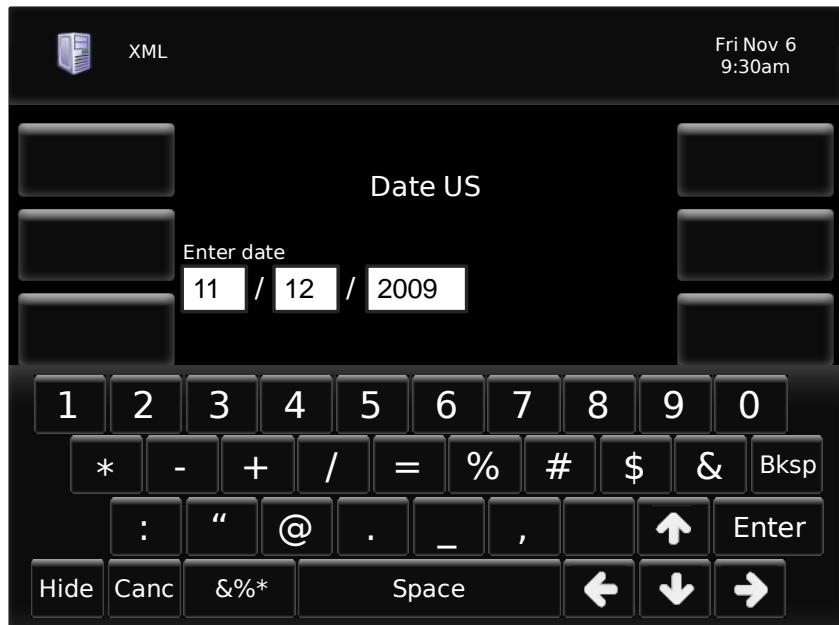


Figure 79: InputScreen “DateUS” Example (6739i)

Notes:



- In this example, when the user press “Done” or “Submit” or “Enter” on the phone after entering “06/14/2009”, the phone will call the following URL
“<http://10.50.10.53/script.pl?date=06/14/2009>”.
 - the `InputScreen` object does not perform any control on the validity of the date entered by the user.
-

3.6.11 INPUT TYPE: DATEINT

When the input type is set to “dateInt”, the user can enter a date using the international format (DD/MM/YYYY).

The user navigates between the various editable fields using the left and right navigation arrow keys.

Notes:



- the “password” attribute has no effect on this input type.
 - the format of the “Default” attribute must be DD/MM/YYYY. If “Default” tag is empty, today’s date is displayed.
-

Object default Softkeys (softkey phones)

Position	Label	Description	URIs
5	Done	Completes the user input by submitting the programmed URI and value.	SoftKey:Submit
6	Cancel	Redisplays the previous XML object present in the phone browser. Does not appear if LockIn set to “yes”.	SoftKey:Exit

XML Example

```
<AastraIPPhoneInputScreen type = "dateInt">
    <Title>Date International</Title>
    <Prompt>Enter date</Prompt>
    <URL>http://10.50.10.53/script.pl</URL>
    <Parameter>date</Parameter>
    <Default></Default>
<AastraIPPhoneInputScreen>
```

Resulting Screen (non softkey phone)



Figure 80: InputScreen “DateInt” Example (*non softkey phone*)

Resulting Screen (softkey phone)

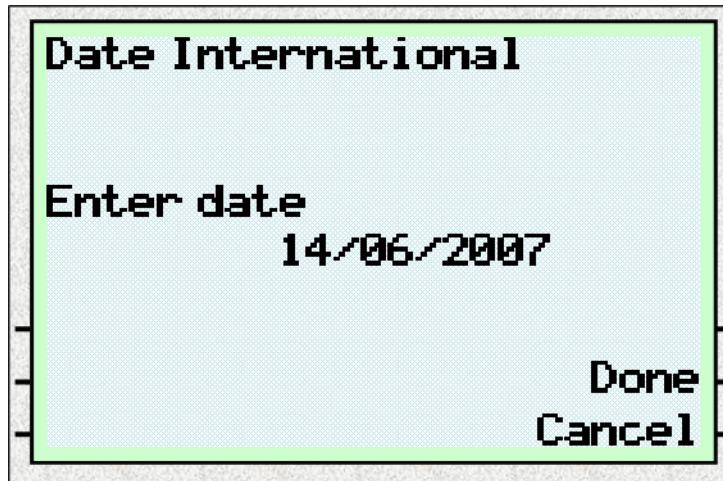


Figure 81: InputScreen “DateInt” Example (*softkey phone*)

Resulting Screen (6739i)



Figure 82: InputScreen “DateInt” Example

Notes:



- In this example, when the user press “Done” or “Submit” or “Enter” on the phone after entering “14/06/2009”, the phone will call the following URL
`“http://10.50.10.53/script.pl?date=14/06/2009”.`
 - **Note:** the `InputScreen` object does not perform any control on the validity of the date entered by the user.
-

3.7 INPUTSCREEN OBJECT – MULTIPLE INPUT FIELDS (55i / 57i / 57ICT / 9480i / 9480ICT / 6735i / 6737i / 6739 / 6867i / 6869i)

The InputScreen object can support up to 10 input fields, each of them potentially having different individual attributes.

The supported input types for each field are the same than the ones supported for the single input object plus an 'empty' type.

For each input field, the following attributes can be defined overriding the ones declared in the main object:

- Type
- Editable
- Password
- Prompt
- Default
- Parameter

Of course, only one URL can be defined to be called when the user has completed his inputs; the label in the parameter tags is appended to the address in the URL tag and sent via HTTP GET. If the Selection tag is used the value of the tag is also appended to the URL tag.

Two display modes are available for the Multiple Input AastralPPhoneInputScreen:

- **Normal**: similar aspect to the single input field with a prompt and the input field on 2 separate lines, two (55i / 57i / 57ICT / 9480i / 9480ICT / 6735i / 6737i) or three (6739 / 6867i / 6869i) input fields will be displayed per screen and the user will be able to scroll through them.
- **Condensed**: the prompt and the input field are on the same line, the prompts being right aligned on the longest prompt. Up to 5 fields are displayed on the same screen.

3.7.1 IMPLEMENTATION (SOFTKEY PHONES)

Object native interactions

- **Done/Submit** Completes the user input by submitting the programmed URI and value.
- **Cancel** Redisplays the previous XML object present in the phone browser

Softkey phone keys

Line selected	Keys	
Input field	Right Arrow Left Arrow	Next Character Previous Character

55i/57i/57ICT/9480i/9480ICT/6735i/6737i Common default Softkeys

Position	Label	Description	URIs
5	Done	Completes the user input by submitting the programmed URI and value.	SoftKey:Submit
6	Cancel	Redisplays the previous XML object present in the phone browser. Not available if LockIn set to "yes".	SoftKey:Exit

3.7.2 IMPLEMENTATION ON THE 6867i/6869i

On the 6867i/6869i, the input is very similar to the softkey phones.

The **Left/Right** keys are used to navigate between characters in the input field.

The **Up/Down** keys allow up and down scrolling in order to display the previous/next input field.

When multiple fields are displayed, the **Select** key is mapped to go to the next field (like the arrow down key) until the last field is reached where it is then mapped to the doneAction tag (Submit by default).



Figure 83: InputScreen implementation on 6867i mode “normal”



Figure 84: InputScreen implementation on 6867i mode “condensed”

The number of fields displayed on a single screen depends on the presence of the optional title.

Object native interaction

- **Submit** Completes the user input by submitting the programmed URI and value.

“SoftKey:Exit”

Object default Softkeys (6867i)

Six customizable softkeys are available for this object. If more than 4 softkeys are configured or needed the softkeys are displayed on 2 pages.

Position	Label	Interaction	URIs
3	Done	Completes the user input by submitting the programmed URI and value.	SoftKey:Submit
4	Cancel	Redisplays the previous XML object present in the phone browser. Not available if <code>LockIn</code> set to	SoftKey:Exit

"yes".

Object default Softkeys (6869i)

Eight customizable softkeys are available for this object. If more than 5 softkeys are configured or needed the softkeys are displayed on 2 pages.

Position	Label	Interaction	URIs
4	Done	Completes the user input by submitting the programmed URI and value.	SoftKey:Submit
5	Cancel	Redisplays the previous XML object present in the phone browser. Not available if LockIn set to "yes".	SoftKey:Exit

On the 6867i/6869i, like "Softkey::Submit" the URI custom softkeys are also appended with the parameter values as well as the selection, this allows to exit the InputScreen object without the validity check. This allows for instance to create an input screen with a field which could be a selection amongst a list of values and come back to the screen without losing the user inputs.

3.7.3 IMPLEMENTATION ON THE 6739I

On the 6739i, the input for a field is done via a virtual keyboard which is displayed when the user touches the input zone; the keyboard is removed if the user touches outside of the input zone.

The key is mapped to the cancelAction tag, if not specified the XML object is destroyed.

The keys allow up and down scrolling in order to display all the fields if needed.

The key on the virtual keyboard resets the content of the input field to its default value.

The key on the virtual keyboard triggers the submission of the entered value.

The key on the virtual keyboard removes the keyboard from the display.



Figure 85: InputScreen implementation on 6739i mode "normal"



Figure 86: InputScreen implementation on 6739i mode “condensed”

Object native interaction

- **Submit** Completes the user input by submitting the programmed URI and value.

“SoftKey:Exit”

Object default Softkeys

Ten customizable softkeys are available for this object.

Position	Label	Interaction	URLs
10	Done	Exit: Redisplays the previous XML object present in the phone browser.	SoftKey:Exit

3.7.4 XML DESCRIPTION

“Red” tags indicates that the tag does not apply to all phones, when not supported the tags are just ignored.

```

<AastraIPPhoneInputScreen
    type = "IP/string/stringN/number/timeUS/timeInt/dateUS/dateInt"
    password = "yes/no"
    editable = "yes/no"
    destroyOnExit = "yes/no"
    cancelAction = "some URI"
    Timeout = "some integer"
    LockIn = "yes/no"
    GoodbyeLockInURI = "some URI"
    allowAnswer = "yes/no"
    allowDrop = "yes/no"
    allowXfer = "yes/no"
    allowConf = "yes/no"
    defaultIndex = "some integer (1 to 10)"
    defaultFocus = "yes/no"
    displayMode = "normal/condensed"
>
    <Title      wrap="yes/no"
                Color="white/black/red/green/brown/blue/magenta
                        cyan/lightgray/darkgray/lightred/lightgreen
                        yellow/lightblue/lightmagenta/lightcyan"
        >Title string</Title>
    <TopTitle   icon="icon index"
                Color="white/black/red/green/brown/blue/magenta
                        cyan/lightgray/darkgray/lightred/lightgreen
                        yellow/lightblue/lightmagenta/lightcyan"
        >Top Title</TopTitle>
    <Prompt     Color="white/black/red/green/brown/blue/magenta
                        cyan/lightgray/darkgray/lightred/lightgreen
                        yellow/lightblue/lightmagenta/lightcyan"
        >Guidance for the input</Prompt>
    <URL>Target receiving the input</URL>
    <Parameter  Color="white/black/red/green/brown/blue/magenta
                        cyan/lightgray/darkgray/lightred/lightgreen
                        yellow/lightblue/lightmagenta/lightcyan"
        >name of the parameter added to URL</Parameter>
    <Default>Default Value</Default>
    <InputField
        type = "IP/string/stringN/number
                timeUS/timeInt/dateUS/dateInt"
        password = "yes/no"
        editable = "yes/no"
    >
        <Prompt Color="white/black/red/green/brown/blue/magenta
                            cyan/lightgray/darkgray/lightred/lightgreen
                            yellow/lightblue/lightmagenta/lightcyan"
            >Guidance for the input</Prompt>
        <Parameter  Color="white/black/red/green/brown/blue/magenta
                            cyan/lightgray/darkgray/lightred/lightgreen
                            yellow/lightblue/lightmagenta/lightcyan"
            >parameter name added to URL</Parameter>
        <Default>Default Value</Default>
        <Selection>Selection</Selection>
        <!--Additional Softkey Items may be added -->
    </InputField>
    <!--Additional Input fields Items may be added -->
    <!--Additional Softkey Items may be added -->
    <!--Additional Icon Items may be added -->
</AastraIPPhoneInputScreen>

```

XML Document Objects

Document Object	Position	Type	Comments
AastralPPhoneInputScreen	Root tag	Mandatory	Root object
Type	Root tag	Optional	Specifies the type of input, possible values are "IP", "string", "stringN", "number", "timeUS", "timeInt", "dateUS", "dateInt". Default value is "string".
Password	Root tag	Optional	Specifies if the input is masked by "*" characters. Default value is "no"
Editable	Root tag	Optional	Specifies if the user is allowed to modify the input. Default value is "yes"
destroyOnExit	Root tag	Optional	"yes/no" indicates if the object is kept or not in the phone browser after exit. If not specified, the object is kept in the browser.
cancelAction	Root tag	Optional	Defines the URI to be called when the user cancels the XML object.
Timeout	Root tag	Optional	Overrides the default 45 seconds timeout of the UI XML object. A Timeout set to "0" will disable the timeout feature. See section 4.10.2 for more details
LockIn	Root tag	Optional	If set to "yes", the phone ignores all events that would cause the screen to exit without using the keys defined by the object. Default value is "no". See section 4.10.3 for more details.
GoodbyeLockInURI	Root tag	Optional	Valid only if LockIn="yes", this tag defines a URI to be called when the "Goodbye" key is pressed during a locked XML session. This URI overrides the native behavior of the "Goodbye" key which is to destroy the current XML object displayed.
allowAnswer	Root tag	Optional	This tag applies only to the non-softkey phones. If set to "yes", the phone will display "Ignore" and "Answer" if the XML object is displayed when the phone is in the ringing state. Default value is "no". See section 6.4 for more details. Only for 6730i, 6731i, 53i,

Document Object	Position	Type	Comments
			6739i, 9143i, 6863i, 6865i
allowDrop	Root tag	Optional	<p>This tag applies only to the non-softkey phones. If set to "yes", the phone will display "Drop" if the XML object is displayed when the phone is in the connected state. Default value is "no". See section 6.4 for more details.</p> <p><i>Only for 6730i, 6731i, 53i, 6739i, 9143i, 6863i, 6865i</i></p>
allowXfer	Root tag	Optional	<p>This tag applies only to the non-softkey phones. If set to "yes", the phone will display "Xfer" if the XML object is displayed when the phone is in the connected state. Default value is "no". See section 6.4 for more details.</p> <p><i>Only for 6730i, 6731i, 53i, 6739i, 9143i, 6863i, 6865i</i></p>
allowConf	Root tag	Optional	<p>This tag applies only to the non-softkey phones. If set to "yes", the phone will display "Conf" if the XML object is displayed when the phone is in the connected state. Default value is "no". See section 6.4 for more details.</p> <p><i>Only for 6730i, 6731i, 53i, 6739i, 9143i, 6863i, 6865i</i></p>
defaultFocus	Root tag	Optional	<p>If set to "yes", the first input field defined by defaultIndex automatically goes to edit mode (keyboard displayed). Default value is "no".</p> <p><i>6739i only</i></p>
displayMode	Root tag	Optional	If set to "normal" the input fields will be displayed with the prompt and the input field on 2 lines. If set to "condensed" both the prompt and the input field are on the same line. Default value is "normal"
defaultIndex	Root tag	Optional	Defines the field where the user will start his input amongst the multiple field inputs. Default 1.
Title	Body	Optional	Text to be used as title for the object
Wrap	Title tag	Optional	<p>If set to "yes" the title of the object will be wrapped on 2 lines.</p> <p><i>Ignored on 6867i, 6869i and</i></p>

Document Object	Position	Type	Comments
			6739 <i>i</i>
			Label color, the possible values are: “white”, “black”, “red”, “green”, “brown”, “blue”, “magenta”, “cyan”,
Color	TopTitle tag	Optional	“lightgray”, “darkgray”, “lightred”, “lightgreen”, “yellow”, “lightblue”, “lightmagenta”, “lightcyan” If not specified the default value is “white”. <i>6867<i>i</i>, 6869<i>i</i> and 6739<i>i</i> only</i>
TopTitle	Body	Optional	Text to be used as top title for the object <i>6867<i>i</i>, 6869<i>i</i> and 6739<i>i</i> only.</i>
Icon	TopTitle tag	Optional	Index of the icon to be used for the top title <i>6867<i>i</i>, 6869<i>i</i> and 6739<i>i</i> only.</i>
Color	TopTitle tag	Optional	Label color, the possible values are: “white”, “black”, “red”, “green”, “brown”, “blue”, “magenta”, “cyan”, “lightgray”, “darkgray”, “lightred”, “lightgreen”, “yellow”, “lightblue”, “lightmagenta”, “lightcyan” If not specified the default value

Document Object	Position	Type	Comments
			is “white”. <i>6867i, 6869i and 6739i only</i>
Prompt	Body	Optional	Text to be displayed as guidance for the user input. Is used as the default value for each input field.
Color	Prompt tag	Optional	<p>Label color, the possible values are:</p> <p>“white”, “black”, “red”, “green”, “brown”, “blue”, “magenta”, “cyan”, “lightgray”, “darkgray”, “lightred”, “lightgreen”, “yellow”, “lightblue”, “lightmagenta”, “lightcyan”</p> <p>If not specified the default value is “yellow” for 6867i, 6869i and “white” for 6739i. <i>6867i, 6869i and 6739i only</i></p>
URL	Body	Mandatory	URI called when user completes his input.
Parameter	Body	Optional	Name of the parameter to be added to the URL after input is complete. Is used as the default value for each input field.
Color	Parameter tag	Optional	<p>Label color, the possible values are:</p> <p>“white”, “black”, “red”, “green”, “brown”, “blue”, “magenta”, “cyan”, “lightgray”, “darkgray”, “lightred”</p>

Document Object	Position	Type	Comments
			"lightgreen", "yellow", "lightblue", "lightmagenta", "lightcyan" If not specified the default value is "white". <i>6867i, 6869i and 6739i only</i>
Default	Body	Optional	Default value to be displayed in the input field. Is used as the default value for each input field.
InputField	Body	Optional	
Type	InputField tag	Optional	Specifies the type of input for the field, possible values are "IP", "string", "number", "timeUS", "timeInt", "dateUS", "dateInt" or "empty". Overrides the value set in the root tag for the field. An "empty" value will create one blank line in condensed mode and 2 blank lines in normal mode.
Password	InputField tag	Optional	Specifies if the input is masked by "*" characters. Default value is "no". Overrides the value set in the root tag for the field.
Editable	InputField tag	Optional	Specifies if the user is allowed to modify the input. Default value is "yes". Overrides the value set in the root tag for the field
Prompt	InputField Body	Optional	Text to be displayed as guidance for the user input. Overrides the value set in the object for the field.
Color	Prompt tag	Optional	Label color, the possible values are: "white", "black", "red", "green", "brown", "blue", "magenta", "cyan", "lightgray", "darkgray", "lightred", "lightgreen",

Document Object	Position	Type	Comments
			<p>“yellow”, “lightblue”, “lightmagenta”, “lightcyan”</p> <p>If not specified the default value is “yellow” for 6867i, 6869i and “white” for 6739i.</p> <p><i>6867i, 6869i and 6739i only</i></p>
Parameter	InputField Body	Optional	<p>Name of the parameter to be added to the URL after input is complete. Overrides the value set in the object for the field.</p>
Color	Parameter tag	Optional	<p>Label color, the possible values are:</p> <p>“white”, “black”, “red”, “green”, “brown”, “blue”, “magenta”, “cyan”, “lightgray”, “darkgray”, “lightred”, “lightgreen”, “yellow”, “lightblue”, “lightmagenta”, “lightcyan”</p> <p>If not specified the default value is “white” for 6867i, 6869i and “black” for 6739i</p> <p><i>6867i, 6869i and 6739i only</i></p>
Default	InputField Body	Optional	<p>Default value to be displayed in the input field. Overrides the value set in the object for the field.</p>
Selection	InputField Body	Optional	<p>The content of this tag will be added when the “Submit” key is pressed while editing this field.</p>
SoftKey	Body	Optional	<p>See section 4.1 for details.</p> <p><i>Only on 6867i, 6869i, 6739i, 6755i, 6757i, 6757ICT, 6735i and 6737i.</i></p>



Note: when the `InputField type` is set to 'empty', a non editable blank line replaced the input field on the display when the XML object is in condensed mode, 2 blank lines for the normal mode. Also an empty field is a proper field; the `defaultIndex` value must consider the empty field as a plain field.

3.7.5 EXAMPLES

XML Example 1

```
<AastraIPPhoneInputScreen
    type="string"
    destroyOnExit="yes"
    displayMode="condensed"
>
    <Title>Restricted application</Title>
    <URL>http://myserver.com/script.php</URL>
    <Default/>
    <InputField type="empty">
    </InputField>
    <InputField type="string">
        <Prompt>Username:</Prompt>
        <Parameter>user</Parameter>
        <Selection>1</Selection>
    </InputField>
    <InputField type="number" password="yes">
        <Prompt>Password:</Prompt>
        <Parameter>passwd</Parameter>
        <Selection>2</Selection>
    </InputField>
    <SoftKey index="10">
        <Label>Exit</Label>
        <URI>SoftKey:Exit</URI>
    </SoftKey>
</AastraIPPhoneInputScreen>
```



Note: In this example, when the user press "Submit" on the phone after entering "admin" for the username and "22222" for the password, the phone will call the following URLs:

- <http://myserver.com/script.php?user=admin&passwd=22222&selection=1>, if the "Submit" or "Enter" key is pressed while editing the "User name" field,
- <http://myserver.com/script.php?user=admin&passwd=22222&selection=2>, if the "Submit" key or "Enter" is pressed while editing the "Password" field.

Resulting Screen (55i/57i/57iCT/9480i/9480iCT/6735i/6737i)



Figure 87: InputScreen multiple inputs “condensed” (55i/57i/57iCT/9480i/9480iCT/6735i/6737i)

Resulting Screen (6739i)

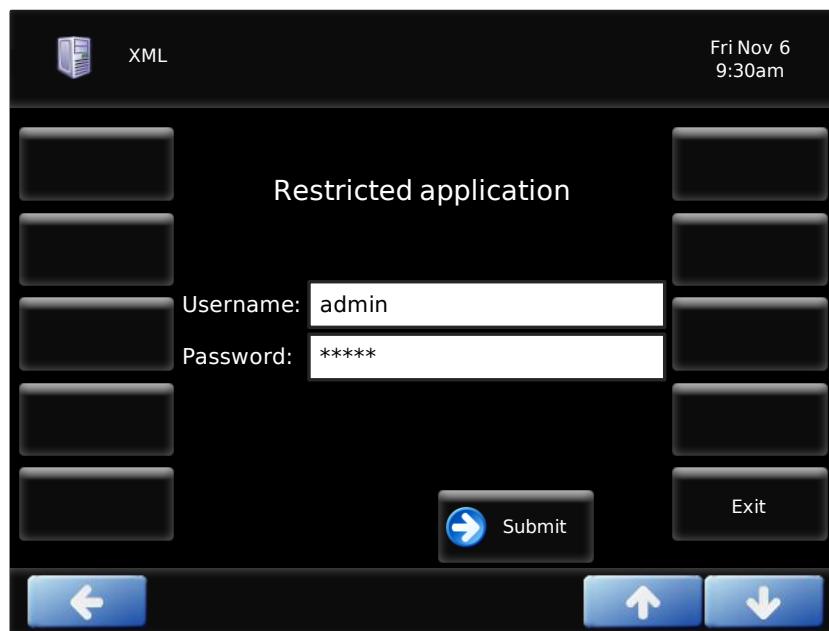


Figure 88: InputScreen multiple inputs “condensed” (6739i)

XML Example 2

```
<AastraIPPhoneInputScreen  
    type="string"  
    destroyOnExit="yes"  
>  
    <Title>Date and Time</Title>  
    <URL>http://myserver.com/script.php</URL>  
    <Default/>  
    <InputField type="dateUS">  
        <Prompt>Enter Date</Prompt>  
        <Parameter>date</Parameter>  
    </InputField>  
    <InputField type="timeUS">  
        <Prompt>Enter Time</Prompt>  
        <Parameter>time</Parameter>  
    </InputField>  
    <SoftKey index="10">  
        <Label>Exit</Label>  
        <URI>SoftKey:Exit</URI>  
    </SoftKey>  
</AastraIPPhoneInputScreen>>
```



Note: In this example, when the user press “Done” on the phone after entering “2/21/2010” for the date and “12:00:00 AM” for the time, the phone will call the following URL “<http://myserver.com/script.php?date=02/21/2010&time=12:00:00AM>”.

Resulting Screen (55i/57i/57iCT/9480i/9480iCT/6735i/6737i)

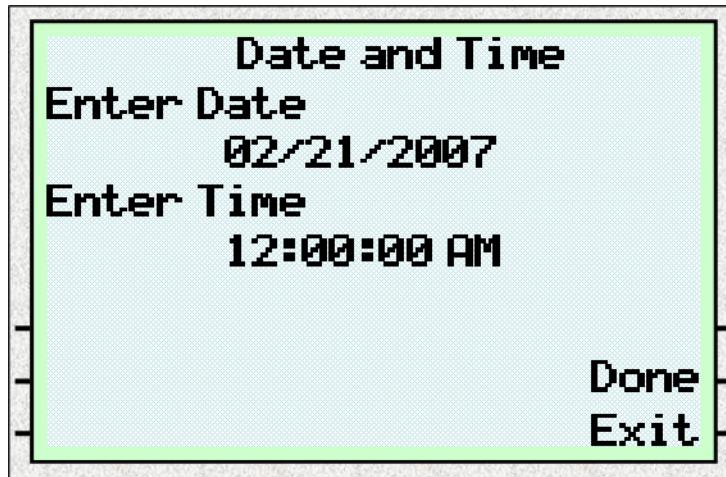


Figure 89: InputScreen multiple inputs “normal” ((55i/57i/57iCT/9480i/9480iCT/6735i/6737i)

Resulting Screen (6739i)

The screenshot displays a mobile application interface with a dark theme. At the top, there is a header bar with a small icon on the left, the word "XML" in the center, and the date and time "Fri Nov 6 9:30am" on the right. Below the header, the main title "Date and Time" is centered. To the left of the title, there is a label "Enter Date" above a date input field showing "02 / 21 / 2010". To the right of the title, there is a label "Enter Time" above a time input field showing "12 : 00 : 00 AM". At the bottom of the screen, there is a row of four buttons: a blue left arrow, a blue up arrow, a blue down arrow, and a blue right arrow labeled "Submit".

Figure 90: InputScreen multiple inputs “normal” (6739i)

3.8 PHONECALLLOG OBJECT (6739I ONLY)

The `PhoneCallLog` object is an UI XML object which mimics the 6739i native user interface for “Call Logs” and “Redial”.

This object allows displaying a list of calls identified by the following parameters for a call:

- Name,
- Number
- Call Date/Time
- Call duration
- Call type (incoming, outgoing, missed)
- Call terminal type (home, office, mobile)
- Number of calls
- SIP line used

Each individual call is displayed in a selectable list and is detailed on the right side of the display. If the image server is configured on the phone, the object also performs an image lookup on the provided number as long as the `image server uri` parameter is properly configured.

3.8.1 IMPLEMENTATION

This object is available only on the 6739i.

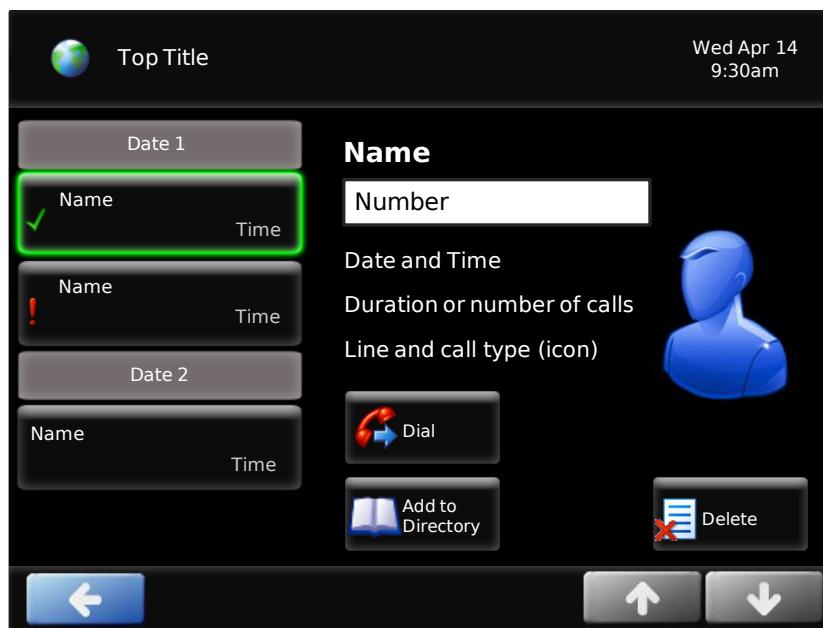


Figure 91: CallLog Implementation

The list of calls is presented as a selectable list sorted by descending date/time on the left side of the screen.



Note: the list is limited to 50 items.

The call details of a selected call are displayed on the right side.



Note: this object has no custom softkey.

Object interaction

- The key is mapped to the `cancelAction` tag, if not specified the XML object is destroyed.
 - The keys allow scrolling up and down the list of calls if needed. When one end is reached they are mapped to `scrollUp` or `scrollDown` tags, if not specified the XML object follows `scrollConstrain` tag.
 - The key is mapped to the `dialUri` tag, if not specified the phone dials the number using the first available line. Selection tag (if set) from the selected log item is added to the HTTP request the same way it would be done for a custom softkey, refer to section 4.2.2 for more details.
 - The key is mapped to the `addUri` tag, if not specified the phone adds the contact name and number in the phone embedded directory. Selection tag (if set) from the selected log item is added to the HTTP request the same way it would be done for a custom softkey, refer to section 4.2.2 for more details.
 - The key is mapped to the `deleteUri` and `deleteAllUri` tag (pressing this key brings a menu with the choice “Delete” or “Delete All”, if not specified the phone deletes the data locally within the object. Selection tag (if set) from the selected log item is added to the HTTP request the same way it would be done for a custom softkey, refer to section 4.2.2 for more details.
-



Note: the key interaction is disabled if the `LockIn` tag is set to “yes”.

3.8.2 XML DESCRIPTION

```

<AstraIPPhoneCallLog
    destroyOnExit = "yes/no"
    Beep = "yes/no"
    cancelAction = "some URI"
    Timeout = "some integer"
    LockIn = "yes/no"
    GoodbyeLockInURI = "some URI"
    allowAnswer = "yes/no"
    allowDrop = "yes/no"
    allowXfer = "yes/no"
    allowConf = "yes/no"
    scrollUp = "some URI"
    scrollDown = "some URI"
    deleteUri = "some URI"
    deleteAllUri = "some URI"
    dialUri = "some URI"
    addUri = "some URI"
>
    <TopTitle icon="icon index"
        Color="white/black/red/green/brown/blue/magenta
        cyan/lightgray/darkgray/lightred/lightgreen
        yellow/lightblue/lightmagenta/lightcyan"
        >Top Title</TopTitle>
    <LogItem type = "incoming/outgoing/missed"
        duration = "call duration in seconds"
        callingTerminal = "office/mobile/home"
        count = "number of calls"
        line = "SIP line used 1-9"
        <Name>name</Name>
        <Number>number</Number>
        <Date>date as MM-DD-YYYY</Date>
        <Time>time as HH:MM (24 hours)</Time>
        <Selection>selection to be added</Selection>
    </LogItem>
    <!--Additional Log Items may be added (up to 50)-->
    <!--Additional Icon Items may be added -->
</AstraIPPhoneCallLog>

```

XML Document Objects

Document Object	Position	Type	Comments
AastralIPPhoneCallLog	Root tag	Mandatory	Root object
destroyOnExit	Root tag	Optional	"yes/no" indicates if the object is kept or not in the phone browser after exit. If not specified, the object is kept in the browser.
cancelAction	Root tag	Optional	Defines the URI to be called when the user cancels the XML object.
Beep	Root tag	Optional	"yes" or "no" to indicate if a notification beep must be generated by the phone.
Timeout	Root tag	Optional	Overrides the default 45 seconds timeout of the UI XML object. A Timeout set to "0" will disable the timeout feature. See section 4.10.2 for more details

Document Object	Position	Type	Comments
LockIn	Root tag	Optional	If set to “yes”, the phone ignores all events that would cause the screen to exit without using the keys defined by the object. Default value is “no”. See section 4.10.3 for more details.
GoodbyeLockInURI	Root tag	Optional	Valid only if LockIn=“yes”, this tag defines a URI to be called when the “Goodbye” key is pressed during a locked XML session. This URI overrides the native behavior of the “Goodbye” key which is to destroy the current XML object displayed.
allowAnswer	Root tag	Optional	This tag applies only to the non-softkey phones. If set to “yes”, the phone will display “Ignore” and “Answer” if the XML object is displayed when the phone is in the ringing state. Default value is “no”. See section 6.3 for more details.
allowDrop	Root tag	Optional	This tag applies only to the non-softkey phones. If set to “yes”, the phone will display “Drop” if the XML object is displayed when the phone is in the connected state. Default value is “no”. See section 6.4 for more details.
allowXfer	Root tag	Optional	This tag applies only to the non-softkey phones. If set to “yes”, the phone will display “Xfer” if the XML object is displayed when the phone is in the connected state. Default value is “no”. See section 6.4 for more details.
allowConf	Root tag	Optional	This tag applies only to the non-softkey phones. If set to “yes”, the phone will display “Conf” if the XML object is displayed when the phone is in the connected state. Default value is “no”. See section 6.4 for more details.
scrollConstrain	Root tag	Optional	If set to “yes”, the phone will not “wrap” the list: scrolling down the last item does not move the cursor to the first item. Default value is “no”.
scrollUp	Root tag	Optional	This tag allows overriding the default behavior of the Up arrow key once the scrolling reaches an end.
scrollDown	Root tag	Optional	This tag allows overriding the default behavior of the Down arrow key once the scrolling reaches an end.
dialUri	Root tag	Optional	This tag allows overriding the default behavior of the “Dial” button.
deleteUri	Root tag	Optional	This tag allows overriding the default behavior of the “Delete” button.
deleteAllUri	Root tag	Optional	This tag allows overriding the default behavior of the “Delete All” button.
addUri	Root tag	Optional	This tag allows overriding the default

Document Object	Position	Type	Comments
			behavior of the “Add to Directory” button.
TopTitle	Body	Optional	Text to be used as top title for the object
Icon	TopTitle tag	Optional	Index of the icon to be used for the top title
			Label color, the possible values are: “white”, “black”, “red”, “green”, “brown”, “blue”, “magenta”, “cyan”, “lightgray”, “darkgray”, “lightred”, “lightgreen”, “yellow”, “lightblue”, “lightmagenta”, “lightcyan”
Color	TopTitle tag	Optional	If not specified the default value is “white”.
LogItem	Body	Mandatory	Log Item (up to 50 instances, minimum is 1 instance)
duration	LogItem tag	Optional	Call duration in seconds.
			Call type, possible values are: incoming outgoing missed
type	LogItem tag	Optional	If not provided, “missed” is assumed.
callingTerminal	LogItem tag	Optional	For incoming calls, type of terminal, possible values are: home office mobile No default value.
count	LogItem tag	Optional	Number of calls from the caller.
line	LogItem tag	Optional	SIP Line used for the call, 1 to 9.
Name	LogItem tag	Optional	Caller or Callee name.
Number	LogItem body	Mandatory	Caller or Callee number
Date	LogItem body	Mandatory	Call date MM-DD-YYYY
Time	LogItem body	Mandatory	Call time HH:MM (24 hours)
Selection	LogItem body	Optional	This tag must be used in conjunction with

Document Object	Position	Type	Comments
			custom uris (addUri, deleteUri, deleteAllUri and dialUri). See Section 4.11 for details
IconList	Body	Optional	List of icon definitions
Icon	IconList body	Optional	Icon value, it can be "Icon:Iconname" or the URL to a png file. See section 4.2.2 for more details.
Index	Icon tag	Optional	Index of the icon must be consistent with the 'Icon' used in the object.

3.8.3 EXAMPLES

XML Example

Application for a Callers List replacement

```
<?xml version="1.0" encoding="ISO-8859-1"?>
<AstraIPPhoneCallLog
    destroyOnExit="yes"
    addUri="http://myserver/myscript?action=add"
>
    <TopTitle icon="1">Callers List</TopTitle>
    <LogItem duration="60"
        type="incoming"
        callingTerminal="mobile"
        line="1">
        <Name>John Doe</Name>
        <Number>972-555-2345</Number>
        <Date>01-01-2012</Date>
        <Time>15:28</Time>
        <Selection>1</Selection>
    </LogItem>
    <LogItem type="missed"
        callingTerminal="home"
        count="2"
        line="1">
        <Name>Jane Doe</Name>
        <Number>408-555-1234</Number>
        <Date>01-05-2011</Date>
        <Time>10:01</Time>
        <Selection>2</Selection>
    </LogItem>
    <IconList>
        <Icon index="1">Icon:Book</Icon>
    </IconList>
</AstraIPPhoneCallLog>
```

Resulting Screen

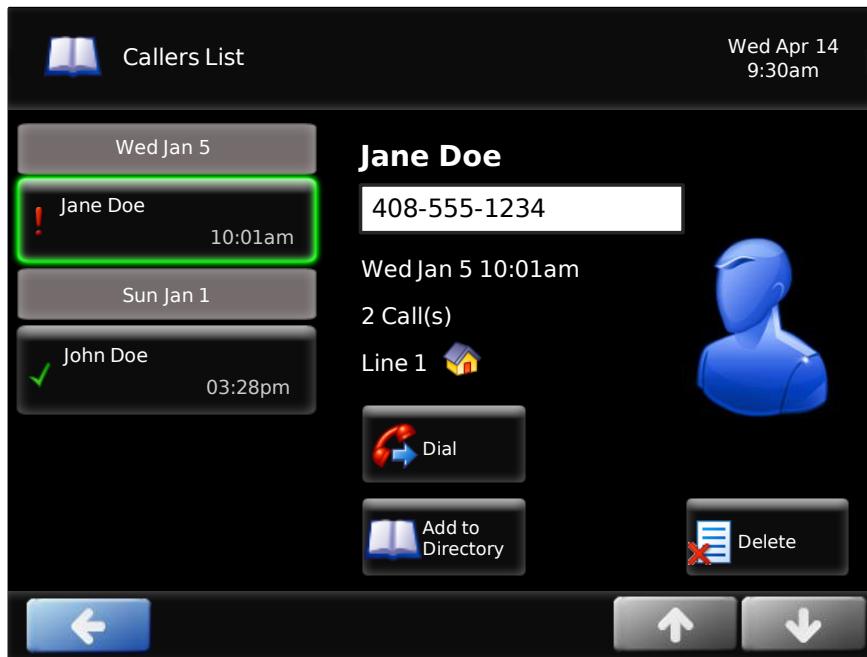


Figure 92: PhoneCallLog Example

If user presses the “Add to directory” button, phone will perform the following HTTP GET.

<http://myserver/myscript?action=add&selection=2>

3.9 PHONESTATUS OBJECT

The `AstraIPPhoneStatus` object provides the ability to display a status message or icon on the phone's idle screen when XML information is pushed from the servers.

If the phone receives multiple messages, the first message received displays first and the remaining messages scroll consecutively one at a time.

The `AstraIPPhoneStatus` object supports 3 modes for the information to be displayed on the idle screen:

Normal mode: messages remain displayed until they are removed (by the server) or after a phone reboot.

Alert mode: **one** message is displayed on top of the existing messages only for a limited time (3 seconds by default) or permanently until removed or replaced by another one.

Icon mode (6867i/6869i/6739i only): **up to 4 icons** are displayed on the top line of the display and remain there until they are removed/replaced (by the server) or after a phone reboot.

→ Note: You can set the amount of time, in seconds, that a message displays to the phone before scrolling to the next message (See *Scroll delay* below).

3.9.1 IMPLEMENTATION (NON SOFTKEY AND SOFTKEY PHONES)

The softkey phones display messages on the second line in the phone window (where “No Service” would display if there was no service. If there is no service on the phone, the “No Service” message overrides the XML object message).

The non softkey phones display messages on the second line. Long messages that are wider than the phone screen get truncated.

Default Softkeys

Not Applicable, this object has no predefined softkey as it impacts only the idle screen of the Mitel SIP Phones.



Note: On the 6867i/6869i alert messages are displayed in red by default

3.9.2 IMPLEMENTATION ON THE 6739I

On the 6739i, the status messages are displayed in a “box” on the idle screen which is also used by the phone to display the missed calls. This “box” can either be flat or a button the user can press if an URI has been sent along with the XML object.

Also on the 6739i, icons can be added to the text. For more details on the 6739i icons please refer to chapter 4.2.2.2.

The user can scroll between messages (if more than one) using the ← and → keys on the side of the status “box”.

The XML object also controls the display of icons on the top line of the display with the same mechanism used by the text messages. If a text message is sent along with the icon, it is displayed below the icon as long as the message is between “00” and “99”, which matches the MWI indicator.

The AastralIPPhoneStatus object feature is always enabled.



Note: Alert messages are displayed in red (default color) on the 6739i. This can be changed using the “Color” tag.

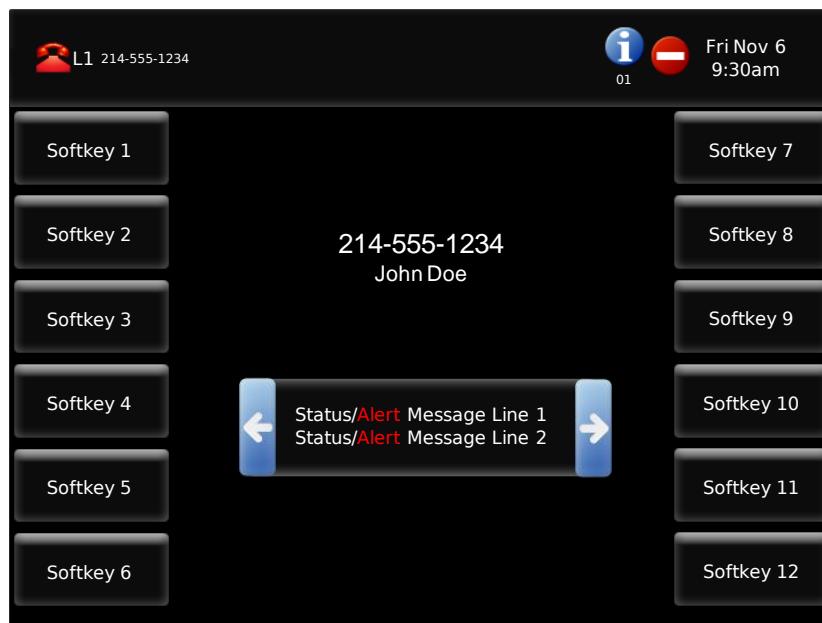


Figure 93: AastralIPPhoneStatus implementation on the 6739i (no URI callback)

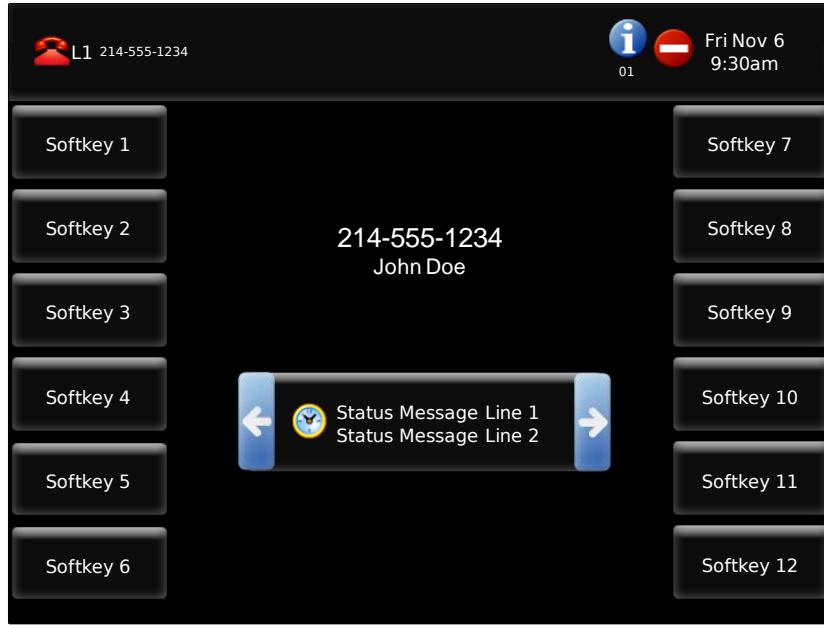


Figure 94: AastralIPPhoneStatus implementation on the 6739i (with URI callback)

3.9.3 XML DESCRIPTION

"**Red**" tags indicates that the tag does not apply to all phones, when not supported the tags are just ignored.

```
<AastralIPPhoneStatus
    Beep = "yes/no"
    triggerDestroyOnExit = "yes/no"
>
<Session>Session ID</Session>
<Message
    Index = "index"
    Color="white/black/red/green/brown/blue/magenta
           cyan/lightgray/darkgray/lightred/lightgreen
           yellow/lightblue/lightmagenta/lightcyan"
    Type = "alert/icon"
    Timeout = "timeout"
    URI = "some URI"
    icon = "icon index"
>Message</Message>
<!--Additional Message Items may be added -->
<!--Additional Icon Items may be added -->
</AastralIPPhoneStatus>
```

Notes:



- The *Session ID* must be unique to the application sending the XML object to the phone. It is up to the application to generate that session ID, which does not have to be limited to just numbers. It could be a combination of letters and numbers. There could only be one Session tag per PhoneStatusMsg object. If the *Session* tag is not provided, the phone assumes a default value (0) for it; this can be used if you don't have multiple applications displaying messages on the idle screen.
- The *type="alert"* tag indicates the alert mode, if not specified, the message is displayed in the normal mode. In this mode a timeout of "0" indicates that the alert message is displayed until a new alert is posted or until the phone is rebooted or a new empty alert is posted. In this mode as only one alert is displayed, the session and index values are ignored.

-
- The `type="icon"` indicates the icon mode, if not specified, the message is displayed in the normal mode. The four icons are referenced by the index value (0 to 3), the session value is ignored.
-

Scroll Delay

The Scroll delay can be configured via the configuration files and the Mitel Web UI using the following parameters:

`xml status scroll delay (via configuration files)`

Status Scroll Delay (in seconds) (via the Mitel Web UI see chapter 7.6)

XML Document Objects

Document Object	Position	Type	Comments
AastralIPPhoneStatus	Root tag	Mandatory	Root object
Beep	Root tag	Optional	"yes" or "no" to indicate if a notification beep must be generated by the phone.
triggerDestroyOnExit	Root tag	Optional	If the XML object is sent as an answer to a UI object, setting this parameter to "yes" will trigger the exit of the calling object as if it was a UI object. See section 4.10.4 for more details.
Session	Body	Optional	Session ID used to identify the application displaying message. It allows message change and message reset. Ignored if type is "alert" or "icon"
Message	Body	Mandatory	Message to be displayed or empty to reset the message.
index	Message tag	Mandatory	Index of the message for the session, the index starts at 0. Ignored if type is "alert". If type is "icon" the index must be from 0 to 3 (4 icons).
Color	Prompt tag	Optional	Label color, the possible values are: "white", "black", "red", "green", "brown", "blue", "magenta", "cyan", "lightgray", "darkgray",

Document Object	Position	Type	Comments
			"lightred", "lightgreen", "yellow", "lightblue", "lightmagenta", "lightcyan" If not specified the default value is "white" for standard messages and "red" for alert messages. <i>6867i, 6869i and 6739i only</i>
type	Message tag	Optional	Type of message, "alert" to indicate that the message is displayed for a limited time. "icon" to indicate an update of the top line icons. If not specified the message stays on the screen until it is reset by an empty message or after a phone reboot. "icon" value is for 6867i, 6869i and 6739i only
Timeout	Message tag	Optional	Timeout of the "alert" message, overrides the 3s default value. If set to "0" the message is displayed indefinitely.
URI	Message tag	Optional	URI to be called when the user presses the message button on the idle screen <i>6739i only</i>
icon	Message tag	Optional	Index of the icon to be used for this message/alert. <i>6867i, 6869i and 6739i only</i>
IconList	Body	Optional	List of icons used in the object <i>6867i, 6869i and 6739i only</i>

3.9.4 EXAMPLES

XML Example 1

```
<AastraIPPhoneStatus Beep="yes">
    <Session>abc12345</Session>
    <Message index="0">Message 1 displayed</Message>
    <Message index="1" type="alert" Timeout="5">Alert displayed</Message>
</AastraIPPhoneStatus>
```

Resulting Screen (non softkey phone)



Figure 95: PhoneStatus Example (non softkey phone)

Resulting Screen (softkey phone)

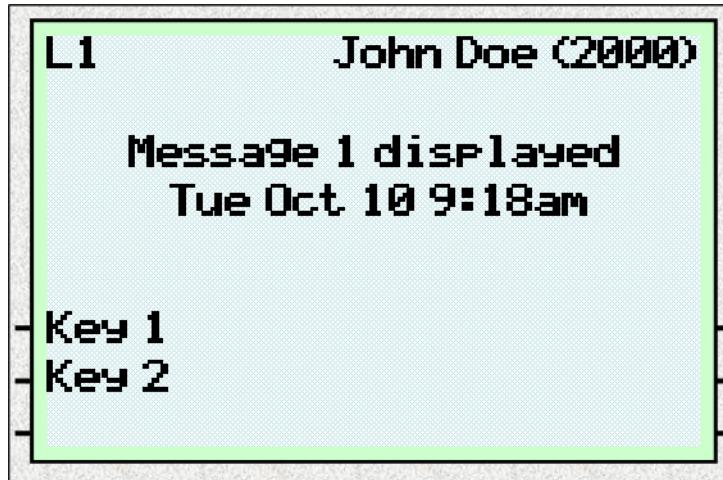


Figure 96: PhoneStatus Example (softkey phone)

XML Example 2

```
<AastraIPPhoneStatus Beep="yes">
    <Session>abc12345</Session>
    <Message index="0">Message 1 is a very long message</Message>
    <Message index="1">Message 2 is shorter</Message>
    <Message index="2" type="alert" Timeout="5">Alert Message</Message>
</AastraIPPhoneStatus>
```

Resulting Screens (6739i)

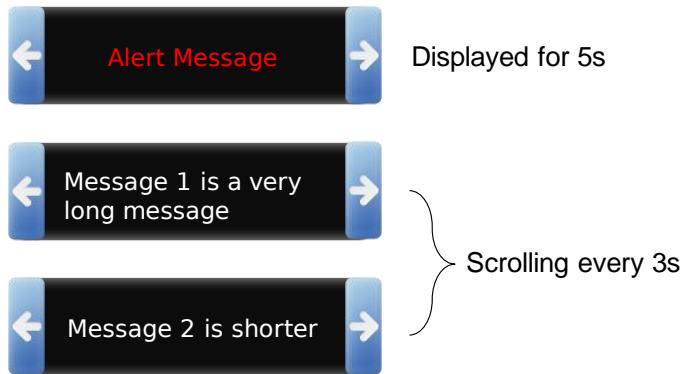


Figure 97: PhoneStatus Example (6739i)

- Note:** The PhoneStatusMsg object can also be used to remove status messages from the display using the same SessionID and the same index. This can be accomplished by setting an empty tag for the Message tag. For example, here is the XML object to remove the previous messages (as the second message was in alert mode it does not remain on the display so no need to remove it).

```
<AastraIPPhoneStatus>
    <Session>abc12345</Session>
    <Message index="0"/>
    <Message index="1"/>
</AastraIPPhoneStatus>
```

- Note (6739i):** The PhoneStatusMsg object can also be used to remove icons from the display using the same index but setting the icon to "Icon:None".

This XML example displays the “information” icon on the top line.

```
<AastraIPPhoneStatus>
    <Session>abc12345</Session>
    <Message index="1" type="icon" icon="1"></Message>
    <IconList>
        <Icon index="1">Icon:Information</Icon>
    </IconList>
</AastraIPPhoneStatus>
```

To remove this icon, the following content must be sent

```

<AAstraIPPhoneStatus>
    <Session>abc12345</Session>
    <Message index="1" type="icon" icon="1"></Message>
    <IconList>
        <Icon index="1">Icon:None</Icon>
    </IconList>
</AAstraIPPhoneStatus>

Or

<AAstraIPPhoneStatus>
    <Session>abc12345</Session>
    <Message index="1" type="icon"></Message>
</AAstraIPPhoneStatus>

```

3.10 PHONEEXECUTE OBJECT (ALL MODELS)

The PhoneExecute object allows an external application to ask the phone to execute a sequence of local actions using a URI.

3.10.1 IMPLEMENTATION

The actions can be:

- Any supported uri
- [http\(s\)://myserver.com/myscript.pl](http://myserver.com/myscript.pl), you can now use variables in the URI, variables are parsed by the phone.
- Dial:XXXXX
- DialLine:X:YYYYYY (X is the SIP line number, YYYYYY is the number or URI to dial) see chapter 4.7 for more details on this feature.
- Led: XXXXXX=on/off/slowflash/fastflash see chapter 4.3 for more details on the LED control.
- Led: all=on/off/slowflash/fastflash to controll all the phone XML keys see chapter 4.3 for more details on the LED control.
- Key: XXXXX see chapter 4.5 for more details on the simulated keypress feature.
- RTPRx:i:p:v:[mix]:[disableIcon] or RTPRx:Stop to control the reception of a Unicast RTP stream, see chapter 4.4 for more details.
- RTPTx:i:p or RTPTx:Stop to control the transmission of a Unicast RTP stream, see chapter 4.4 for more details.
- RTPMRx:i:p:v:[mix]:[disableIcon] to control the reception of a Multicast RTP stream, see chapter 4.4 for more details.
- RTPMTx:i:p:[mix]:[disableIcon] to control the transmission of a Multicast RTP stream, see chapter 4.4 for more details.
- Stream a wav file, see chapter 4.6 for more details.
- Download and play a wav file, see chapter 4.7 for more details.
- Phone Reboot (URI="Command: Reset"), the phone will restart (if the phone is idle) and process the complete boot sequence (configuration, language packs, firmware...)
- Phone Fast Reboot (URI="Command: FastReboot"), the phone will restart (if the phone is idle) but will reduce the boot sequence as it will not check for new firmware and will only download language packs if there is a change in supported languages
- Phone Lock (URI="Command: Lock"), this command will lock the phone and will allow only emergency calls.
- Phone Unlock (URI="Command: Unlock"), this command will unlock the phone.
- Clear local configuration and reboot (URI="Command: ClearLocal")
- Clear the callers list and missed calls indicator (URI="Command: ClearCallersList")
- Clear the local directory (URI="Command:ClearDirectory")
- Clear the redial list (URI="Command:ClearRedialList")

- Retrieve crash and configuration file (URI="Command:UploadSystemInfo") , see chapter 4.9 for more details.
- Do nothing (URI="")

More actions will be implemented in future firmware versions.

In order to prevent a pushed dial uri from putting an active call on hold the PhoneExecute object supports an optional tag "interruptCall". By default, the attribute will allow the current call to be interrupted. To prevent this, set the attribute to "no".

3.10.2 XML DESCRIPTION

```
<AstraIPPhoneExecute
    Beep
    triggerDestroyOnExit="yes/no"
>
    <ExecuteItem URI="URI" interruptCall="yes/no"/>
<!!--Additional ExecuteItems may be added -->
</AstraIPPhoneExecute>
```

XML Document Objects

Document Object	Position	Type	Comments
AastralPPhoneExecute	Root tag	Mandatory	Root object
Beep	Root tag	Optional	"yes" or "no" to indicate if a notification beep must be generated by the phone.
triggerDestroyOnExit	Root tag	Optional	If the XML object is sent as an answer to a UI object, setting this parameter to "yes" will trigger the exit of the calling object as if it was a UI object. See section 4.10.4 for more details.
ExecuteItem	Body	Optional	Tag for the action to be executed
URI	ExecuteItem tag	Optional	URI describing the action to be executed.
interruptCall	ExecuteItem tag	Optional	When the URI is a dial command, if this tag is set to 'no' an existing call will not be put on hold.

3.10.3 EXAMPLES

```
<AstraIPPhoneExecute>
    <ExecuteItem URI="http://myserver.com/myscript.php"/>
    <ExecuteItem URI="Dial:12345" interruptCall="no"/>
    <ExecuteItem URI="Command: ClearCallersList"/>
    <ExecuteItem URI="Command: ClearDirectory"/>
    <ExecuteItem URI="Command: ClearRedialList"/>
    <ExecuteItem URI="Command: Reset"/>
</AstraIPPhoneExecute>
```

This example will make the phone execute 6 actions:

- Do an HTTP GET to myserver.com/myscript.php
- Dial 12345 without putting any current call on hold
- Clear the Callers List
- Clear the local directory
- Clear the Redial List
- Reset the phone

Notes:



- the “do nothing” can be used when an application needs to display nothing as an answer to a HTTP GET.
 - you must be careful when you use the “Dial:” URI as the state of phone is unknown at the time of the XML GET.
 - the FastReboot command will speed up the boot process of the phone which may be useful in the self-configuration application.
-

3.11 PHONECONFIGURATION OBJECT (ALL MODELS)

The `PhoneConfiguration` object allows an external application to modify the phone configuration dynamically. The configuration parameters are the ones that are used in the configuration files (`astra.cfg` and `<MAC>.cfg`) and detailed in the administrator guide.

3.11.1 IMPLEMENTATION

The phone parameters have 2 levels of precedence: 'server' where the parameters are coming from the configuration files and 'local' where the parameters are locally set via the TUI or WebUI. The 'local' parameters override the 'server' parameters.

The `AstralIPPhoneConfiguration` object supports a parameter called 'setType' which allows defining at which level the parameter change will apply.

- `remote` - parameter will be saved with the same precedence as the server settings. This set will not persist through a reboot.
- `local` - parameter will be saved with the same precedence as TUI or WebUI settings. This set will persist through reboots of the phone. The only way to unset this type is via the TUI, WebUI, or another local type set.
- `oneBoot` - parameter will be saved with a precedence above server settings and below local settings. This parameter will persist through a single reboot and be lost after that. Using this value for setType anywhere in the object will cause the phone to reboot when the AstraIPPhoneConfiguration object is done parsing
- `override` - parameter will be saved with the same precedence as server settings. This is different from `remote` because it will also override a conflicting local value. This override will persist through a reboot but the new value will be lost.



Note: Default value is 'remote' as it was the object behavior prior to firmware release 2.4.0.

If `setType` is set in the `AstralIPPhoneConfiguration` root tag, it affects all of the `ConfigurationItem` sub-elements but when set in the `ConfigurationItem` tag it will affect that set only (override the global setting for the object).

The number of parameters to be sent in a single `Phoneconfiguration` object is only limited by the overall size of the XML object (10000 bytes). Practically 30 parameters can be sent in a single object.



Note: Not all the configuration parameters are dynamic; specifically the network parameters are static and need a reboot.

The list of the dynamic configuration parameters is detailed in section 14.

3.11.2 XML DESCRIPTION

```

<AAstraIPPhoneConfiguration
    Beep = "yes/no"
    triggerDestroyOnExit = "yes/no"
    setType = "remote/local/oneBoot/override"
>
    <ConfigurationItem setType = "remote/local/oneBoot/override">
        <Parameter
            firstItem="first instance"
            lastItem="last instance"
            >parameter#</Parameter>
    Or
        <Parameter>parameter</Parameter>
        <Value>value</Value>
    </ConfigurationItem>
<!--Additional ConfigurationItems may be added -->
</AAstraIPPhoneConfiguration>

```

XML Document Objects

Document Object	Position	Type	Comments
AastralIPPhoneConfiguration	Root tag	Mandatory	Root object
Beep	Root tag	Optional	"yes" or "no" to indicate if a notification beep must be generated by the phone.
triggerDestroyOnExit	Root tag	Optional	In case the XML object is sent as an answer to a UI object, setting this parameter to "yes" will trigger the exit of the calling object as if it was a UI object. See section 4.10.4 for more details.
setType	Root tag	Optional	Tag to define the type of configuration change. It applies to all sub-items.
ConfigurationItem	Body	Optional	Tag for the configuration change
setType	ConfigurationItem tag		Tag to define the type of configuration change. It applies only to this item and overrides global policy.
Parameter	ConfigurationItem tag	Mandatory	Configuration parameter to be changed
firstItem	Parameter tag	Optional	These parameters define the range of the parameter values.
lastItem	Parameter tag	Optional	The parameter must include the character '#' in the name.
Value	ConfigurationItem tag	Mandatory	New value of the configuration parameter.

3.11.3 EXAMPLES

XML Example 1: 'remote'

```
<AastraIPPhoneConfiguration>
  <ConfigurationItem>
    <Parameter>softkey1_label</Parameter>
    <Value>Test</Value>
  </ConfigurationItem>
</AastraIPPhoneConfiguration>
```

or

```
<AastraIPPhoneConfiguration setType="remote">
  <ConfigurationItem>
    <Parameter>softkey1_label</Parameter>
    <Value>Test</Value>
  </ConfigurationItem>
</AastraIPPhoneConfiguration>
```

If `softkey1_label` parameter is unset, set via the configuration files, or set via another `setType="remote"` it will be assigned the value "Test". This value will be lost when the phone reboots. If "`softkey1_label`" has been set locally, this object will not change it.

XML Example 2: 'local'

```
<AastraIPPhoneConfiguration setType="local">
  <ConfigurationItem>
    <Parameter>softkey1_label</Parameter>
    <Value>Test</Value>
  </ConfigurationItem>
</AastraIPPhoneConfiguration>
```

The `softkey1_label` parameter will be given the value "Test" whichever way this parameter was set before and this value will persist through reboots.

XML Example 3: 'override'

```
<AastraIPPhoneConfiguration setType="override">
  <ConfigurationItem>
    <Parameter>softkey1_label</Parameter>
    <Value>Test</Value>
  </ConfigurationItem>
</AastraIPPhoneConfiguration>
```

The `softkey1_label` parameter will be set to the value "Test". When the phone reboots, `softkey1_label` will revert to the server configured value or its default if no server configured value is present.

XML Example 4: 'oneBoot'

```
<AastraIPPhoneConfiguration setType="oneBoot">
  <ConfigurationItem>
    <Parameter>tftp_server</Parameter>
    <Value>10.50.103.12</Value>
  </ConfigurationItem>
</AastraIPPhoneConfiguration>
```

If the `tftp_server` parameter is unset, set via the configuration files, or another `setType="remote"` it will be assigned the value "10.50.103.12". When this object is done parsing the phone will reboot. Upon booting tftp server will still have the value "10.50.103.12". This value will be lost after configuration files have been downloaded from the server.

XML Example 5: Mixed types

```
<AastraIPPhoneConfiguration setType="local">
    <ConfigurationItem setType="oneBoot">
        <Parameter>softkey1 label</Parameter>
        <Value>Test</Value>
    </ConfigurationItem>
    <ConfigurationItem>
        <Parameter>softkey2 label</Parameter>
        <Value>Test</Value>
    </ConfigurationItem>
    <ConfigurationItem setType="override">
        <Parameter>softkey3 label</Parameter>
        <Value>Test</Value>
    </ConfigurationItem>
</AastraIPPhoneConfiguration>
```

Parameter softkey1 label will be set using the oneBoot rules (the phone will not reboot yet).

Parameter softkey2 label will be set using the local rules.

Parameter softkey3 label will be set using the override rules.

When all three items are done being set, the phone reboots as at least one configuration parameter was using the oneBoot policy.

XML Example 6: Parameter range

```
<AastraIPPhoneConfiguration>
    <ConfigurationItem>
        <Parameter firstItem="1" lastItem="20">
            softkey# type</Parameter>
            <Value></Value>
        </ConfigurationItem>
    </AastraIPPhoneConfiguration>
```

This example sets the parameters “softkey1 type” to “softkey20 type” to a blank value. This feature is very useful to limit the number of configuration parameters to be sent.

4 XML EXTENSIONS

4.1 CUSTOMIZABLE SOFTKEYS (SOFTKEY PHONES)

The Softkey object can be used to override the default softkeys in each of the XML objects. It allows developers to link arbitrary URIs to keys in the XML screens and invoke softkey behavior native to each XML screen type.

XML Description (9480i/9480iCT/55i/57i/57iCT/6735i/6737i/6867i/6869i)

6 softkeys are available (8 for the 6869i)

```
<SoftKey index = "1-6" icon = "iconindex">
<Label>Text</Label>
<URI>
http(s)://someserver/somepage
OR SoftKey:XXXXXX
OR Dial:somenumber
</URI>
</SoftKey>
<IconList>
    <Icon index = "iconindex">Icon:Iconname or Hex Icon</Icon>
    <Icon index = "iconindex">Icon:Iconname or Hex Icon</Icon>
<!-As many as used in the softkey definition -->
</IconList>
```

Notes:



- Icons are not supported on the 6867/6869ii
 - Custom softkeys are only available for the UI XML objects.
 - If you use custom softkeys, the default softkeys of the XML object are not displayed anymore. This means they have to be recreated as custom softkeys.
-

XML Description (6739i)

10 softkeys are available

```
<SoftKey index = "1-10">
    <Label Color="white/black/red/green/brown/blue/magenta
           cyan/lightgray/darkgray/lightred/lightgreen
           yellow/lightblue/lightmagenta/lightcyan">
        <Text></Text>
    <URI>
        http(s)://someserver/somepage
        OR SoftKey:Exit
        OR SoftKey:Submit
        OR Dial:somenumber
    </URI>
    </SoftKey>
    <IconList>
        <Icon index = "iconindex">Icon:Iconname or Hex Icon</Icon>
        <Icon index = "iconindex">Icon:Iconname or Hex Icon</Icon>
    <!-As many as used in the softkey definition -->
    </IconList>
```



Notes:

- Custom softkeys are only available for the UI XML objects.
-

-
- Only “SoftKey:Exit” and “SoftKey:Submit” are supported as a special softkey
-

XML Document Objects

Document Object	Position	Type	Comments
SoftKey	Body	Mandatory	Softkey Root object (up to 6 or 10 for 6739i)
Index	SoftKey Root tag	Mandatory	Indicates the softkey number
Icon	SoftKey Root tag	Optional	Index of the icon to be used from the icon list
Label	SoftKey Body	Mandatory	Label of the softkey
URI	SoftKey Body	Mandatory	URI called if the softkey is pressed
IconList	Body	Optional	Icon root object
Icon	Iconlist Body	Optional	Icon definition see chapter 4.2.2 for more details.
index	Icon tag	Optional	Icon index (from 1 to 21)

 **Note:** The phone supports up to 21 different icons in the same XML object, going over this limit will generate a parsing error on the phone.

Available object commands (9480i/9480iCT/55i/57i/57iCT/6735i/6737i/6867i/6869i)

The following softkey functionality is available to the developer for the purpose of reordering or preserving the default functionality of the XML screens.

- “SoftKey:Select” is available for AastralPPhoneTextMenu only and calls the `URI` tag of the selected MenuItem.
- “SoftKey:Exit” is available for all UI XML objects and redisplays the previous XML object present in the phone browser.
- “SoftKey:Dial” is available to screens that allow input. The dial string for the “Dial” function is taken from the menu items `URI` on the Menu Screen, and from the editor field input on the Input Screen.
- “SoftKey:Dial2” is available only for the AastralPPhoneTextMenu, AastralPPhoneTextScreen and AastralPPhoneFormattedTextScreen objects and will dial the number set by the “Dial” tag.
- “SoftKey:Submit” is available only for the AastralPPhoneInputScreen object, it completes the user input by submitting the programmed URI (`URL` tag) and value (`Parameter` tag).
- “SoftKey:BackSpace” is available only for the AastralPPhoneInputScreen object, it deletes the character placed before the cursor.
- “SoftKey:NextSpace” is available only for the AastralPPhoneInputScreen object, it inserts a “space” character at the cursor position.
- “SoftKey:Dot” is available only for the AastralPPhoneInputScreen object, it inserts a “.” character at the cursor position.
- “SoftKey:ChangeMode” is available only for the AastralPPhoneInputScreen object, it allows a toggle between lower case, upper case and digit inputs.
- “SoftKey:Answer” is available for all UI XML objects and allows the user to answer an incoming call. This softkey will only be displayed if it is created while the phone is in an incoming state and disappears when the call is answered or ignored.

- “SoftKey:Ignore” is available for all UI XML objects and allows the user to ignore an incoming call. This softkey will only be displayed if it is created while the phone is in an incoming state and disappears when the call is answered or ignored.
 - “Softkey: Drop” is available for all UI XML objects and allows the user to drop the current call. This softkey will only be displayed if it is created while the phone is in connected state and disappears when the call is dropped.
-



Note: Dropping the call using the drop softkey will maintain the current XML display.

“Softkey:Conf” is available for all UI XML objects and allows the user to start a 3-way conference. This softkey will only be displayed if it is created while the phone is in connected state and disappears when the call is dropped or the conference started.



Note: Using this softkey will destroy the current XML display.

“Softkey:Xfer” is available for all UI XML objects and allows the user to transfer the current call. This softkey will only be displayed if it is created while the phone is in connected state and disappears when the call is transferred or dropped.



Note: Using this softkey will destroy the current XML display.

“SoftKey:SymbolList=”XYZ”” is available only for the AastralPPhoneInputScreen object, it allows an input of a custom list of characters at the cursor position.

The format is:

```
<SoftKey index="1">
  <Label>Symbols</Label>
  <URI>SoftKey:SymbolList="@."</URI>
</SoftKey>
```

The content of the Symbol List must be encapsulated with quotes.



Note: SymbolList supports only standard ASCII characters.

Note that there can be multiple SymbolList softkeys with different list of symbols. There are some special characters that need to be encoded due to XML limitations (see chapter 2.6 for the encoded value).

Available object commands (6739i)

“SoftKey:Exit” is available for all UI XML objects and redisplays the previous XML object present in the phone browser.

“SoftKey:Submit” is available for AastralPPhoneInputScreen.

Softkey availability per object

SoftKey	TextScreen	TextMenu	InputScreen
Select		X	
Exit	X	X	X

SoftKey	TextScreen	TextMenu	InputScreen
Dial		X	X
Dial2	X	X	
Submit			X
BackSpace			X
NextSpace			X
Dot			X
ChangeMode			X
Answer ¹	X	X	X
Ignore ¹	X	X	X
Drop ²	X	X	X
Xfer ²	X	X	X
Conf ²	X	X	X
SymbolList			X

SoftKey	Formatted TextScreen	ImageScreen	ImageMenu
Select			
Exit	X	X	X
Dial			
Dial2	X		
Submit			
BackSpace			
NextSpace			
Dot			
ChangeMode			

¹ This softkey will only be displayed if it is created while the phone is in an incoming state.

² This softkey will only be displayed if it is created while the phone is in a connected state.


SoftKey	Formatted TextScreen	ImageScreen	ImageMenu
Answer ¹	X	X	X
Ignore ¹	X	X	X
Drop ²	X	X	X
Xfer ²	X	X	X
Conf ²	X	X	X
SoftKey List			

You can define up to six, eight or ten softkeys depending on the phone model before the closing tag of any object. The following example illustrates the use of the softkey XML element used with the Text Menu object, and the resulting screen output.


XML Example 1

```
<AstraIPPhoneTextMenu>
<Title> My Directory </Title>
<MenuItem>
<Prompt>John Doe 1</Prompt>
<URI>10.50.10.49</URI>
</MenuItem>
<MenuItem>
<Prompt>John Doe 2</Prompt>
<URI>Dial:200</URI>
</MenuItem>
<MenuItem>
<Prompt>John Doe 3</Prompt>
<URI>Dial:201</URI>
<Dial>201</Dial>
</MenuItem>
<SoftKey index = "3">
<Label>Previous</Label>
<URI>http://someserver/somepage.xml</URI>
</SoftKey>
<SoftKey index = "8">
<Label>Next</Label>
<URI>http://someserver/somepage.xml</URI>
</SoftKey>
<SoftKey index = "10">
<Label>Exit</Label>
<URI>SoftKey:Exit</URI>
</SoftKey>
</AstraIPPhoneTextMenu>
```

Resulting Screen (9480i/9480iCT/55i/57i/57iCT/6735i/6737i)

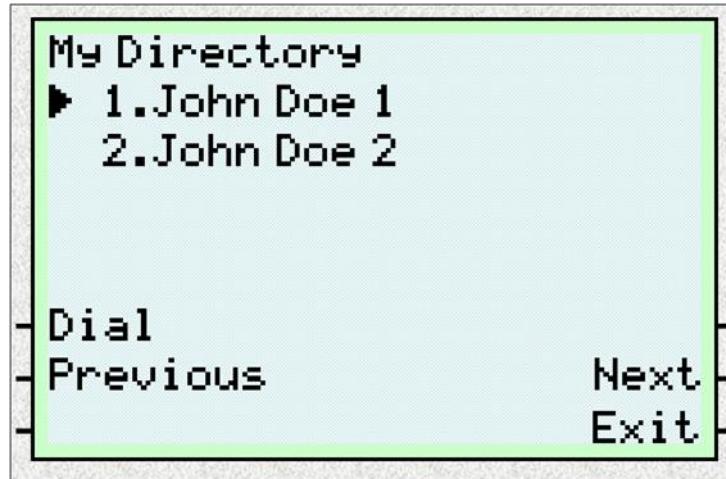

Resulting Screen (6739i)

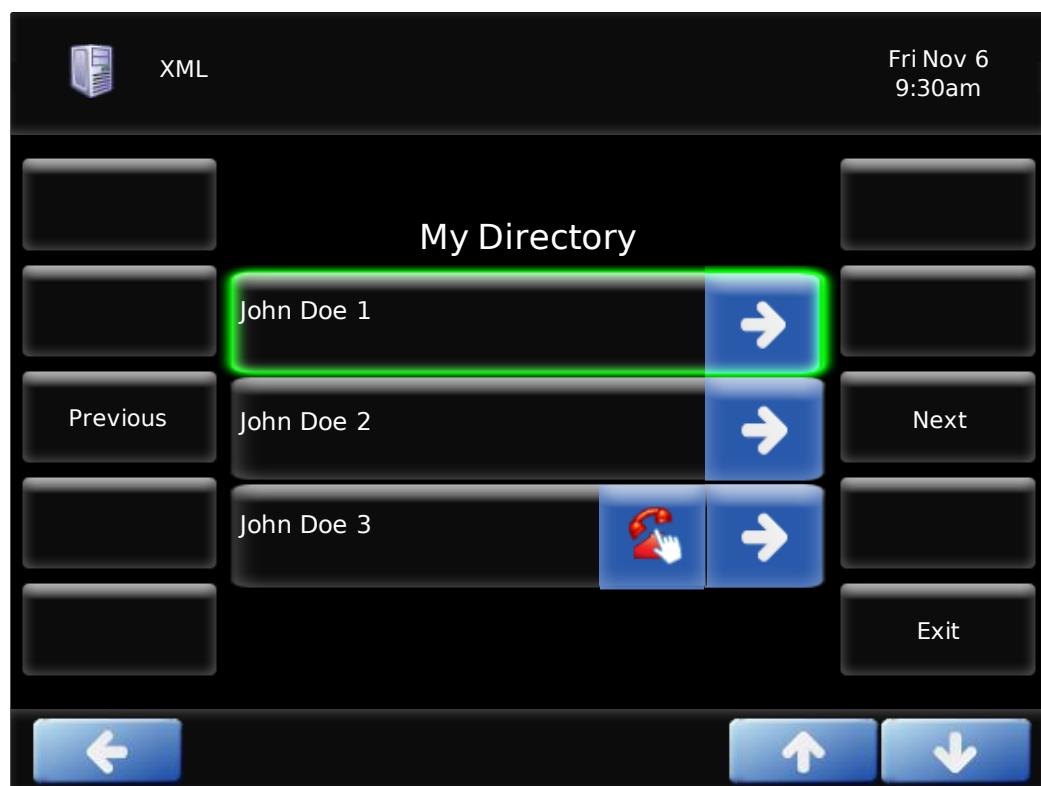

XML Example 2 (9480i/9480iCT/55i/57i/57iCT/6735i/6737i)

```
<AastraIPPhoneInputScreen type="string">
<Title>Title</Title>
<Prompt>Enter email address</Prompt>
<URL>http://myserver.com/script.php</URL>
<Parameter>email</Parameter>
<Default></Default>
<SoftKey index="1">
<Label>Backspace</Label>
<URI>SoftKey:BackSpace</URI>
</SoftKey>
<SoftKey index="2">
<Label>Symbols</Label>
<URI>SoftKey:SymbolList="@."</URI>
</SoftKey>
<SoftKey index="5">
<Label>Done</Label>
<URI>SoftKey:Submit</URI>
</SoftKey>
<SoftKey index="6">
<Label>Exit</Label>
<URI>SoftKey:Exit</URI>
</SoftKey>
</AastraIPPhoneInputScreen>
```

Resulting Screen



[4.2 GRAPHICS \(55i/57i/57iCT/6735i/6737i/6867i/6869i/6739i\)](#)

[4.2.1 IMAGES](#)

4.2.1.1 Implementation on the 55i/57i/57iCT/6735i/6737i

The `image` tag is used by the `ImageScreen` and `ImageMenu` XML objects.

Format

Two hex characters map to one byte of pixel data, where each bit represents a pixel. The image data describes the bitmap from left to right and top to bottom. The data is padded on an 8-bit boundary, so if the height and width do not match the pixel information, then the image will not display correctly.

The entire LCD on the 5 series IP phones can be used to display images.

Notes:



- with firmware 4.1.0, the size of the images to be displayed is limited to 144x40 pixels.
 - Mitel provides a Microsoft Windows tool called “bitmapconverter” able to convert any black and white Windows bitmap to the hexadecimal string to be used with Mitel graphical XML objects. The syntax under Windows command line interface is “bitmapconverter XXXXX.bmp”, the output is the result.
-

Screen resolution

The 55i/6735i screen has a resolution of 144 by 75 pixels.

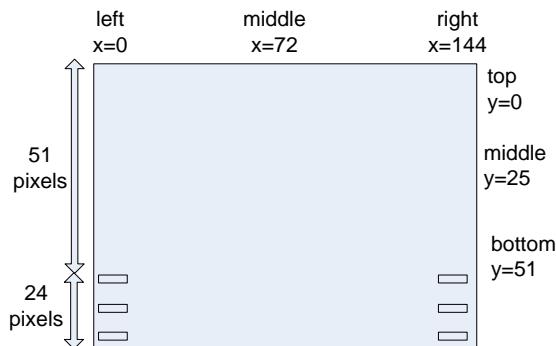


Figure 98: Mitel 6755i screen.

Similarly, the 57i/57iCT/6737i has a resolution of 144 by 128 pixels. The center of this display is at (72, 64).

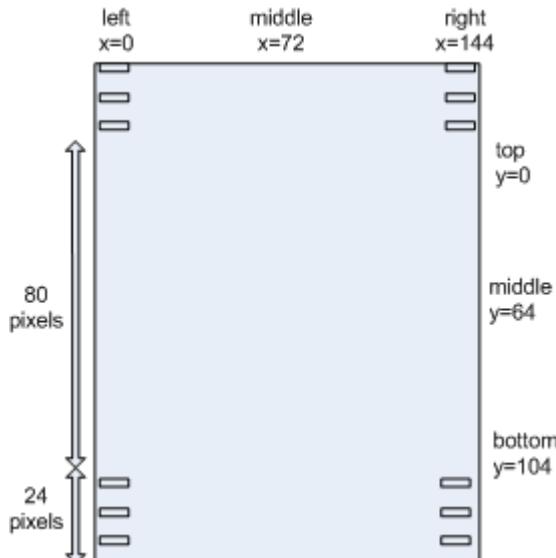


Figure 99: Mitel 6757i/6757i CT screen

4.2.1.2 Implementation on the 6867i

The `image` tag is used by the `ImageScreen` and `ImageMenu` XML objects.

Format

The 6867i supports 24/32 bits depth png or jpeg files, the `image` tag must include the URL to retrieve the png or jpeg file. The supported protocols are:

- TFTP

- FTP
- HTTP
- HTTPS

The area available to display the picture is 320x240 pixels, the phone uses the provided width and height tags as the display zone, if the image sent is bigger than the display zone, the picture is clipped using the top left corner as the origin of the clipping area.

Same thing if the width or height is larger than the supported resolution, the phone will use the minimum value and will clip if needed.

If the phone cannot retrieve the picture using the provided URL, the “unknown” image is displayed.

4.2.1.3 Implementation on the 6869i

The `image` tag is used by the `ImageScreen` and `ImageMenu` XML objects.

Format

The 6869i supports 24/32 bits depth png or jpeg files, the `image` tag must include the URL to retrieve the png or jpeg file. The supported protocols are:

- TFTP
- FTP
- HTTP
- HTTPS

The area available to display the picture is 480x272 pixels, the phone uses the provided width and height tags as the display zone, if the image sent is bigger than the display zone, the picture is clipped using the top left corner as the origin of the clipping area.

Same thing if the width or height is larger than the supported resolution, the phone will use the minimum value and will clip if needed.

If the phone cannot retrieve the picture using the provided URL, the “unknown” image is displayed.

4.2.1.4 Implementation on the 6739i

The `image` tag is used by the `ImageScreen` and `ImageMenu` XML objects.

Format

The 6739i supports 24 bits depth png or jpeg files, the `image` tag must include the URL to retrieve the png or jpeg file. The supported protocols are:

- TFTP
- FTP
- HTTP
- HTTPS

The area available to display the picture is 380x340 pixels, the phone uses the provided width and height tags as the display zone, if the image sent is bigger than the display zone, the picture is clipped using the top left corner as the origin of the clipping area.

Same thing if the width or height is larger than the supported resolution, the phone will use the minimum value and will clip if needed.

If the phone cannot retrieve the picture using the provided URL, the “unknown” image is displayed.

4.2.2 ICONS

4.2.2.1 Implementation on the 55i/57i/57iCT/6735i/6737i

On top of images, the 6755i, 6757i, 6757i CT, 6735i and 6737i support icons in some XML objects:

- TextMenu
- Custom softkeys

Format

The icons use the same encoding format than the images: two hex characters map to one byte of pixel data, where each bit represents a pixel, the icon data describes the icon from left to right.

Icons are 8 pixels high and a multiple of 6 pixels wide.

As the font used by the phone is 7 pixels high, in order to align the icons with the labels, it is recommended to use icons with the first row of pixel (from the bottom) empty. Also it is recommended to leave the last column empty to leave a space between the icon and the label.

In the following example which is a single cell icon, it is recommended to use 5x7 icons.

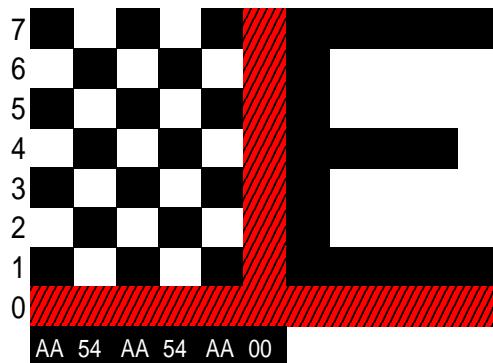


Figure 100: One cell icon

For a two cell icon, the recommended size is 11x7.

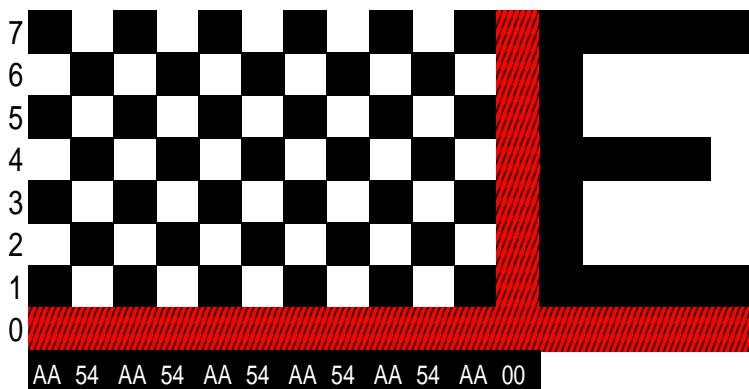


Figure 101: Two cell icon

3 cells: 17x7...

Predefined icons

Some predefined icons are available in the phone. To use the predefined icons you must set the `Icon` tag to `Icon:IconName` where `IconName` is the name of the predefined icon.

Here is the list of the available icons.

Name	Icon	Name	Icon
PhoneOnHook		ArrowDown	
PhoneOffHook		ArrowsUpAndDown	
PhoneRinging		FilledCircle	
DND		EmptyCircle	
ArrowRight		Envelope	
ArrowLeft		Square	
Prohibit		Ellipse	
Speaker		TailArrowUp	
ArrowUp		TailArrowDown	

Icons declaration

Icons are identified by an index in the XML objects; this index refers to the `IconList` tag which must be present each an icon is used.

```
<IconList>
  <Icon index = "iconindex">Icon:Iconname or Hex Icon</Icon>
  <Icon index = "iconindex">Icon:Iconname or Hex Icon</Icon>
  <!--As many as used in the object definition -->
</IconList>
```



Note: in the TextMenu object which can have icons in the `MenuItem`s and in the custom Softkeys, all the icons must be defined in a single `IconList` tag.

Other useful icons

Icon	Hex Value	Icon	Hex Value
	000000007E565AFE00000000		000000FEAEFAAEFE00000000
	00000066 4E5A4E6600000000		00000010 3E7A3E1000000000

4.2.2.2 Implementation on the 6867i/6869i

The 6867i/6869i also support icons in some XML objects:

- AastralPPPhoneTextMenu in the `menuItem` tags
- AastralPPPhoneStatus in the `icon` tags when type is set to “icon”
- All UI objects in `TopTitle` tag

But not in the Custom softkeys for the UI XML objects.

Only predefined icons residing in the 6867i/6869i identified by a unique name are available.

Predefined icons

Some predefined icons are available in the phone. To use the predefined icons you must set the `Icon` tag to `Icon:IconName` where `IconName` is the name of the predefined icon.

Here is the list of the available icons.

Name	Icon	Name	Icon
Icon:Add		Icon:Lock	

Name	Icon	Name	Icon
Icon:ArrowDown		Icon:MissedCall	
Icon:ArrowLeft		Icon:Mute	
Icon:ArrowRight		Icon:Office	
Icon:ArrowUp		Icon:Outgoing	
Icon:ArrowUpAndDown		Icon:OutgoingMissed	
Icon:BLF_Busy		Icon:PhoneDial	
Icon:BLF_Hold		Icon:PhoneOffHook	
Icon:BLF_Ringing		Icon:PhoneOnHold	
Icon:BLF_Unknown		Icon:PhoneOnHook	
Icon:Book		Icon:PhoneRinging	
Icon:Calendar		Icon:PresenceAbsent	
Icon:CallFailed		Icon:PresenceAvailable	
Icon:CallFwd		Icon:PresenceBusy	
Icon:CellPhone		Icon:PresenceMeeting	
Icon:CheckBoxCheck		Icon:PresenceNotAvailable	
Icon:CheckBoxUnCheck		Icon:PresenceSignedOut	

Name	Icon	Name	Icon
Icon:CircleBlue		Icon:PresenceUnknown	
Icon:CircleGreen		Icon:Prohibit	
Icon:CircleRed		Icon:RingTone	
Icon:CircleYellow		Icon:Save	
Icon:Delete		Icon:Search	
Icon:DND		Icon:Settings	
Icon>Edit		Icon:Speaker	
Icon:Envelope		Icon:StarBlue	
Icon:EnvelopeOpen		Icon:StarYellow	
Icon:Home		Icon:TailArrowDown	
Icon:Incoming		Icon:TailArrowUp	
Icon:IncomingMissed		Icon:UnLock	
Icon:Information		Icon:Warning	
Icon:Key		Icon:World	

Icons declaration

Icons are identified by an index in the XML objects; this index refers to the `IconList` tag which must be present each an icon is used.

```

<IconList>
    <Icon index = "iconindex">Icon:Iconname</Icon>
    <Icon index = "iconindex">Icon:Iconname</Icon>
    <!--As many as used in the object definition -->
</IconList>

```

4.2.2.3 Implementation on the 6739i

The 6739i also support icons in some XML objects:

- AastralPPhoneTextMenu
- AastralPPhoneStatus

And also Custom softkeys for the UI XML objects.

Two types of icons are supported:

- Predefined icons residing in the 6739i identified by a unique name
- Dynamic icons identified by a URI, the icon files are downloaded by the 6739i

Predefined icons

Some predefined icons are available in the phone. To use the predefined icons you must set the `Icon` tag to `Icon:IconName` where `IconName` is the name of the predefined icon.

Here is the list of the available icons.

Name	Icon	Name	Icon
Icon:PhoneOnHook		Icon:Mute	
Icon:PhoneOffHook		Icon:Settings	
Icon:PhoneRinging		Icon:Key	
Icon:DND		Icon:PhoneDial	
Icon:ArrowRight		Icon:PhoneOnHold	
Icon:ArrowLeft		Icon:CallFailed	
Icon:Prohibit		Icon:Calendar	
Icon:Speaker		Icon:Search	
Icon:ArrowUp		Icon:BLF_Busy	

Name	Icon	Name	Icon
Icon:ArrowDown		Icon:BLF_Hold	
Icon:ArrowUpAndDown		Icon:BLF_Ringing	
Icon:Envelope		Icon:BLF_Unknown	
Icon:CheckBoxUnCheck		Icon:CellPhone	
Icon:TailArrowUp		Icon:Add	
Icon:TailArrowDown		Icon:Delete	
Icon:CheckBoxCheck		Icon>Edit	
Icon:Lock		Icon:Information	
Icon:UnLock		Icon:CircleBlue	
Icon:EnvelopeOpen		Icon:CircleRed	
Icon:Home		Icon:CircleGreen	
Icon:Book		Icon:CircleYellow	
Icon:Warning		Icon:World	
Icon:Office		Icon:StarBlue	
Icon:Save		Icon:StarYellow	
Icon:PresenceAvailable		Icon:PresenceMeeting	
Icon:PresenceAbsent		Icon:PresenceNotAvailable	

Name	Icon	Name	Icon
Icon:PresenceBusy		Icon:CallFwd	
Icon:MissedCall			

Dynamic icons

Dynamic icons are identified by an URI which is the location of the graphical file on a server.

Icon files must be:

- png files
- resolution 32x32 pixels
- 24 bits depth

Supported protocols are:

- TFTP
- FTP
- HTTP
- HTTPS

Note: dynamic icons are not yet supported in the AastralPPhoneStatus phone object.

Example

```
<IconList>
  <Icon index="1">http://myserver/icons/icon.png</Icon>
</IconList>
```

Icons declaration

Icons are identified by an index in the XML objects; this index refers to the `IconList` tag which must be present each an icon is used.

```
<IconList>
  <Icon index = "iconindex">Icon:Iconname or URI</Icon>
  <Icon index = "iconindex">Icon:Iconname or URI</Icon>
  <!--As many as used in the object definition -->
</IconList>
```

Note: in the `TextMenu` object which can have icons for the `MenuItem`s and for the custom Softkeys, all the icons must be defined in a single `IconList` tag.

4.3 LED CONTROL

You can control the status of the LED associated to a phone key as long as the key is configured as an XML key. This can be done using the universal URI

"Led: XXXXX=on/off/fastflash/slowflash"

Even if the 6739i does not have LED attached to the softkeys on its main display, an equivalent feature has been developed to mimic the LED behavior still available on the expansion modules.

Where XXXXX represents the key you want to modify the LED or "all" for all the keys.



Note: the LED state is lost after a phone reboot.

The supported LED states are:

- on, the LED is steady on
- off, the LED is steady off
- slowflash, the LED blinks at a slow pace
- fastflash, the LED blinks at a fast pace

Keys supported on a 6730i/6731i

- prgkey1 to prgkey8

Keys supported on a 9143i

- prgkey1 to prgkey7

Keys supported on a 9480i/9480iCT

- None

Keys supported on a 53i

- prgkey1 to prgkey6

Keys supported on a 55i/6735i

- prgkey1 to prgkey6
- softkey1 to softkey20

Keys supported on a 57i/57i CT/6737i

- topsoftkey1 to topsoftkey10
- softkey1 to softkey20

Keys supported on an expansion module (6865i/6867i/6869i)

- M680i expmodX key1 to expmodX key16
- M685i expmodX key1 to expmodX key74
- Where X is the expansion module number (1 to 3)

Keys supported on a 6865i

- prgkey1 to prgkey8

Keys supported on a 6867i

- topsoftkey1 to topsoftkey20
- softkey1 to softkey18
- hardkey1 (L1)
- hardkey2 (L2)
- hardkey3 (Redial)
- hardkey4 (Callers)

Keys supported on a 6869i

- topsoftkey1 to topsoftkey44
- softkey1 to softkey24
- hardkey1 (L1)
- hardkey2 (L2)
- hardkey3 (Redial)
- hardkey4 (Callers)


Keys supported on an expansion module (53i/55i/57i/571CT/6735i/6737i)

- 536M: expmodX key1 to expmodX key36
- 560M: expmodX key1 to expmodX key60

Where X is the expansion module number (1 to 3)

Implementation on the 6867i/6869i

Though the 6867i/6869i has physical LEDs for the topsoftkeys, the LED status is also indicated on the screen.

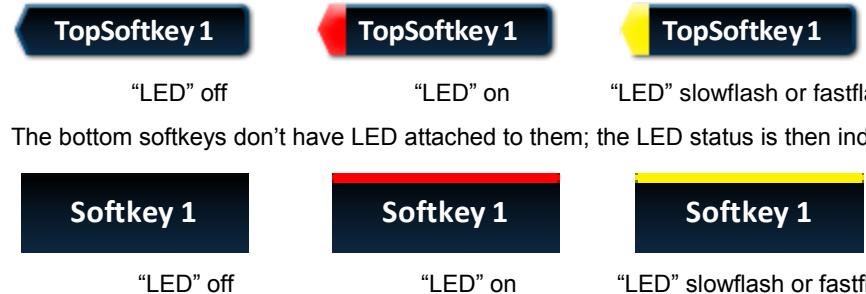

The bottom softkeys don't have LED attached to them; the LED status is then indicated on the screen.



Keys supported on a 6739i

- softkey1 to softkey55

Implementation on the 6739i

As the 6739i has no physical LEDs, the LEDs are replaced by colored/blinking softkeys.



XML Example

```
<AastraIPPhoneExecute>
  <ExecuteItem URI="Led: softkey1=on"/>
  <ExecuteItem URI="Led: softkey1=off"/>
  <ExecuteItem URI="Led: prgkey2=fastflash"/>
  <ExecuteItem URI="Led: expmod2 key20=slowflash"/>
  <ExecuteItem URI="Led: all=off"/>
</AastraIPPhoneExecute>
```

4.4 RTP STREAMING

The Mitel SIP Phones have XML commands to use with the `AastraIPPhoneExecute` object, these commands allow the phone to send/receive an RTP stream to/from any given multicast/unicast addresses (without involving any SIP signaling).

The XML commands to use with the `AastraIPPhoneExecute` object in an XML application are:

RTPRx (Receive (Rx) a Unicast RTP stream or stop receiving a Unicast/Multicast RTP streams)

RTPTx (Transmit (Tx) a Unicast RTP stream or stop transmitting a Unicast/Multicast RTP streams)

RTPMRx (Receive (Rx) a Multicast RTP stream)

RTPMTx (Transmit (Tx) a Multicast RTP stream)

 **Note:** Though the RTP commands could be considered as URLs they can not be used directly as a URI, they must be launch using a `AastraIPPhoneExecute` command..

The phones support **only** the following RTP stream format:

G.711 µ-law Codec

20 ms packet size

 **Note:** If one of the previous commands is sent to phone which is already in a communication, current call is placed on hold and the RTP streaming commands are performed using a new audio path.

Each RTP streaming command supports 2 modes:

With audio path mixing

Without audio path mixing

When the RTP streaming command is sent to the phone with an existing audio path (the phone is in the “connected” state), depending on the mixing parameter, the phone will behave differently.

With the audio mixing set to on, the command will apply on the existing audio path, for instance, sending a RTPTx will “add” the RTP streaming to the audio path. The typical use is for “agent whisper” in a contact center environment, “page whisper”, call recording...

With the audio mixing set to off, the command will create a new audio path putting the initial call on hold, for instance sending a RTPRx will create a new audio path. The typical use is for paging.

Notes: Mixing is not supported:

 when both the cordless handset (57iCT/9480iCT) and the base are connected. 57i/9480iCT.
when the phone is already in a 3-way conference.

4.4.1 RTPRX

The RTPRx URI instructs the phone to receive a Unicast RTP stream or stop receiving Unicast or Multicast RTP streams. The RTPRx formats to use with the `AastraIPPhoneExecute` XML object in the URI are:

```
RTPRx:i:p:[v]:[mix]:[disableIcon]
RTPRx:Stop
```

Where:

- i specifies the IP Address from which the stream is coming.
- p specifies the UDP port on which to receive the RTP stream. You must ensure that this is a number greater than 3100 to make sure not to use a port already bound to the phone.
- v (optional) indicates the optional volume setting that controls the volume of the stream playout. The supplied value is an offset to the current volume setting. After the initial volume level gets set and the stream starts, you can manually change the volume level as required using this “v” option. If you do not specify the optional volume parameter, the phone uses the current volume setting on the phone as the default.
- mix (optional) specifies that the incoming RTP stream will be added to the existing audio stream if it exists.
- disableIcon (optional) specifies that the “mix” icon is not displayed (if “mix” is configured in the command).

Stop specifies to stop any active custom RTP stream from being received.

Scenarios for “mix” RTP

Phone State	Action
Phone is in “idle” state	Phone initiates a new RTP session on the paging line and the paging line is displayed.
Phone is in “connected” state	Phone starts playing the incoming RTP stream on top of the existing call. Paging line is not displayed.
Phone is in a 3-way conference.	Request for receiving RTP is declined.
57iCT/9480iCT, base and handsets are in a “connected” state.	Request for receiving RTP is declined.
57iCT/9480iCT, handset is in “connected” state.	Phone starts playing the incoming RTP stream on top of the existing call. Paging line is not displayed.
The active voice call is dropped (RTP stream was being played on top of this voice call).	RTP stream is dropped as well.
A new call comes in while the active voice call (RTP stream was being played on top of this voice call) is put on hold.	RTP mixed stream is played on top of the currently active call.

Example1:

This example orders the phone to receive a unicast RTP stream from 10.30.100.20 at UDP port 21000 with the voice settings at 3 levels more than the current offset.

```
<AastraIPPhoneExecute>
<ExecuteItem URI = "RTPRx:10.30.100.20:21000:3"/>
</AastraIPPhoneExecute>
```

Example 2:

This example orders the phone to receive a unicast RTP stream from 10.30.100.20 at UDP port 21000 using the current voice settings.

```
<AastraIPPhoneExecute>
<ExecuteItem URI = "RTPRx:10.30.100.20:21000"/>
</AastraIPPhoneExecute>
```

Example 3:

This example orders the phone to receive a unicast RTP stream from 10.30.100.20 at UDP port 21000 using the current voice settings and audio mixing.

```
<AastraIPPhoneExecute>
<ExecuteItem URI = "RTPRx:10.30.100.20:21000:mix"/>
</AastraIPPhoneExecute>
```

Example 4:

This example orders the phone to receive a unicast RTP stream from 10.30.100.20 at UDP port 21000 with the voice settings at 3 levels more than the current offset, audio mixing and disabling the mixing icon.

```
<AastraIPPhoneExecute>
<ExecuteItem URI = "RTPRx:10.30.100.20:21000:3:mix:disableIcon"/>
</AastraIPPhoneExecute>
```

Example 5:

This example orders the phone to stop an incoming active multicast/unicast RTP stream.

```
<AastraIPPhoneExecute>
<ExecuteItem URI="RTPRx:Stop"/>
</AastraIPPhoneExecute>
```

Note: Once the RTPRx command in the URI is sent to the phone, it stops the phone from listening to any previous RTPRx or RTPMRx commands. The phone starts listening based on the most recent RTPRx command received. This behavior also applies to the RTPRx:Stop and RTPMRx:Stop commands as well but does not enable any further listening.

4.4.2 RTPTX

The RTPTx URI instructs the phone to transmit a Unicast RTP stream or to stop transmitting Unicast or Multicast RTP streams. The RTPTx formats to use with the AastraIPPhoneExecute object in the URI are:

```
RTPTx:i:p:[mix]:[disableIcon]
RTPTx:Stop
```

Where

- i specifies the IP Address to which an RTP stream is transmitted.
- p specifies the UDP port on which to transmit the RTP stream. You must ensure that this is a number greater than 3100 to make sure not to use a port already bound to the phone.
- mix (optional) specifies that the RTP stream sent will be the existing audio stream if it exists.
- disableIcon (optional) specifies that the “mix” icon is not displayed (if “mix” is configured in the command).

Stop specifies to stop any active custom RTP stream from being received.

Scenarios for “mix” RTP

Phone State	Action
Phone is in “idle” state	Phone initiates a new RTP session on the paging line and the paging line is displayed.
Phone is in “connected” state	Phone starts sending the mixed RTP stream. Paging

Phone State	Action
	line is not displayed.
Phone is in a 3-way conference.	Request for sending RTP is declined.
57iCT/9480iCT, base and handsets are in a "connected" state.	Request for sending RTP is declined.
57iCT/9480iCT, handset is in "connected" state.	Paging call is initiated using the voice stream with the mixed audio from the conference stream, paging line is not displayed.
The active voice call is dropped (RTP stream was being played on top of this voice call).	RTP stream is dropped as well.
A new call comes in while the active voice call (RTP stream was being played on top of this voice call) is put on hold.	RTP mixed stream is sent for the current active call.

Example 1:

This example orders the phone to send a unicast RTP stream to 10.30.100.20 on UDP port 21000.

```
<AastraIPPhoneExecute>
<ExecuteItem URI = "RTPTx:10.30.100.20:21000"/>
</AastraIPPhoneExecute>
```

Example 2:

This example orders the phone to send a unicast RTP stream to 10.30.100.20 on UDP port 21000 with audio mixing.

```
<AastraIPPhoneExecute>
<ExecuteItem URI = "RTPTx:10.30.100.20:21000:mix"/>
</AastraIPPhoneExecute>
```

Example 3:

This example orders the phone to send a unicast RTP stream to 10.30.100.20 on UDP port 21000 with audio mixing and "mix" icon disabled.

```
<AastraIPPhoneExecute>
<ExecuteItem URI = "RTPTx:10.30.100.20:21000:mix:disableIcon"/>
</AastraIPPhoneExecute>
```

Example 4:

This example orders the phone to stop an outgoing active multicast/unicast RTP stream.

```
<AastraIPPhoneExecute>
<ExecuteItem URI="RTPTx:Stop"/>
</AastraIPPhoneExecute>
```

4.4.3 RTPMRX

The RTPMRx URI instructs the phone to receive a Multicast RTP stream. The RTPMRx format to use with the AastraIPPhoneExecute object in the URI is:

```
RTPMRx:i:p:[v]:[mix]:[disableIcon]
```

Where

- i specifies the multicast IP Address from which to receive an RTP stream.

- p specifies the UDP port on which to receive the RTP stream. You must ensure that this is a number greater than 3100 to make sure not to use a port already bound to the phone.
- v (optional) indicates the optional volume setting that controls the volume of the stream playout. The supplied value is an offset to the current volume setting. After the initial volume level gets set and the stream starts, you can manually change the volume level as required using this "v" option. If you do not specify the optional volume parameter, the phone uses the current volume setting on the phone as the default.
- mix (optional) specifies that the incoming RTP stream will be added to the existing audio stream if it exists.
- disableIcon (optional) specifies that the "mix" icon is not displayed (if "mix" is configured in the command).

Scenarios for "mix" RTP

Phone State	Action
Phone is in "idle" state	Phone initiates a new RTP session on the paging line and the paging line is displayed.
Phone is in "connected" state	Phone starts playing the incoming RTP stream on top of the existing call. Paging line is not displayed.
Phone is in a 3-way conference.	Request for receiving RTP is declined.
57iCT/9480iCT, base and handsets are in a "connected" state.	Request for receiving RTP is declined.
57iCT/9480iCT, handset is in "connected" state.	Phone starts playing the incoming RTP stream on top of the existing call. Paging line is not displayed.
The active voice call is dropped (RTP stream was being played on top of this voice call).	RTP stream is dropped as well.
A new call comes in while the active voice call (RTP stream was being played on top of this voice call) is put on hold.	RTP mixed stream is played on top of the currently active call.

Example 1:

This example orders the phone to receive a multicast RTP stream from 239.0.1.20 on UDP port 21000 with the voice settings at -3 levels less than the current offset.

```
<AastraIPPhoneExecute>
<ExecuteItem URI = "RTPMRx:239.0.1.20:21000:-3"/>
</AastraIPPhoneExecute>
```

Example 2:

This example orders the phone to receive a multicast RTP stream from 239.0.1.20 at UDP port 21000 with the current voice settings.

```
<AastraIPPhoneExecute>
<ExecuteItem URI = "RTPMRx:239.0.1.20:21000"/>
</AastraIPPhoneExecute>
```

Example 3:

This example orders the phone to receive a multicast RTP stream from 239.0.1.20 at UDP port 21000 with the current voice settings and audio mixing.

```
<AastraIPPhoneExecute>
<ExecuteItem URI = "RTPMRx:239.0.1.20:21000:mix"/>
</AastraIPPhoneExecute>
```

Example 4:

This example orders the phone to receive a multicast RTP stream from 239.0.1.20 at UDP port 21000 with the current voice settings and audio mixing with the “mix” icon disabled.

```
<AastraIPPhoneExecute>
<ExecuteItem URI = "RTPMRx:239.0.1.20:21000:mix:disableIcon"/>
</AastraIPPhoneExecute>
```

 **Note:** Once the RTPMRx command in the URI is sent to the phone, it stops the phone from listening to any previous RTPRx or RTPMRx commands. The phone starts listening based on the most recent RTPMRx command received. This behavior also applies to the RTPRx:Stop and RTPMRx:Stop commands as well, but the “Stop” command does not enable any further listening.

4.4.4 RTPMTX

The RTPMTx URI instructs the phone to transmit a Multicast RTP stream. The RTPMTx format to use with the AastralIPPhoneExecute object in the URI is:

```
RTPMTx:i:p:[mix]:[disableIcon]
```

Where

- i specifies the Multicast IP Address to which an RTP stream is transmitted.
- p specifies the UDP port on which to transmit the RTP stream. You must ensure that this is a number greater than 3100 to make sure not to use a port already bound to the phone.
- mix (optional) specifies that the RTP stream sent will be the existing audio stream if it exists.
- disableIcon (optional) specifies that the “mix” icon is not displayed (if “mix” is configured in the command).

Scenarios for “mix” RTP

Phone State	Action
Phone is in “idle” state	Phone initiates a new RTP session on the paging line and the paging line is displayed.
Phone is in “connected” state	Phone starts sending the mixed RTP stream. Paging line is not displayed.
Phone is in a 3-way conference.	Request for sending RTP is declined.
57iCT/9480iCT, base and handsets are in a “connected” state.	Request for sending RTP is declined.
57iCT/9480iCT, handset is in “connected” state.	Paging call is initiated using the voice stream with the mixed audio from the conference stream, paging line is not displayed.
The active voice call is dropped (RTP stream was being played on top of this voice call).	RTP stream is dropped as well.
A new call comes in while the active voice call (RTP stream was being played on top of this voice call) is put on hold.	RTP mixed stream is sent for the current active call.

Example 1:

This example orders the phone to send a multicast RTP stream to 239.0.1.20 from UDP port 21000.

```
<AastraIPPhoneExecute>
<ExecuteItem URI = "RTPMTx:239.0.1.20:21000"/>
</AastraIPPhoneExecute>
```

Example 2:

This example orders the phone to send a multicast RTP stream to 239.0.1.20 from UDP port 21000 with audio mixing.

```
<AastraIPPhoneExecute>
<ExecuteItem URI = "RTPMTx:239.0.1.20:21000:mix"/>
</AastraIPPhoneExecute>
```

Example 3:

This example orders the phone to send a multicast RTP stream to 239.0.1.20 from UDP port 21000 with audio mixing and “mix” icon disabled.

```
<AastraIPPhoneExecute>
<ExecuteItem URI = "RTPMTx:239.0.1.20:21000:mix:disableIcon"/>
</AastraIPPhoneExecute>
```

4.4.5 INTERACTION WITH ACTION URIS

action uri incoming

The action uri incoming is not triggered when the phone starts streaming RTP. This is a known issue which will be fixed in a future firmware release.

action uri connected

The action uri connected is not triggered when the phone starts streaming RTP. This is a known issue which will be fixed in a future firmware release.

action uri onhook

The action uri onhook is triggered at the end of the RTP streaming but the URL variables are not bound. This is a known issue which will be fixed in a future firmware release.

action uri disconnected

The action uri disconnected is not triggered at the end of the RTP streaming. This is a known issue which will be fixed in a future firmware release.

4.5 KEYPRESS EMULATION

The Mitel SIP Phones support a “Key” URI to allow the XML application to send an event that a key has been pressed on the phone. The system initiates the event as if the button was physically pressed.

The phone maps key events to the phone physical keys and not to their mapped logical keys.

The exceptions to this rule are

- Xfer,
- Icom,
- Conf

as they can be dynamically mapped on the phone.

Notes:



- If the key is a valid key, the phone executes the key regardless of the current phone status.
 - Phone does not send a response detailing the success or failure of a simulated key.
-

Lines

- Key:Line1 to Key:Line4 Line 1 to 4
-



Note: Since no Mitel phone has Line 5 to 9 physical keys, Line5 to Line9 are not supported.

Keypad

- Key:KeyPad0 to Key:KeyPad9 Numeric Keypad buttons 0-9
- Key:KeyPadStar *Star button
- Key:KeyPadPound # Hash button

Programmable keys (depending on model)

- Key:SoftKey1 to Key:SoftKey55 soft keys 1-55
 - Key:PrgKey1 to Key:PrgKey11 programmable keys 1-11
 - Key:TopSoftKey1 to Key:TopSoftKey10 top softkeys 1-10
 - Key:ExpMod1SoftKey1 to Key:ExpMod1SoftKey60 exp. module 1 keys 1 to 60
 - Key:ExpMod2SoftKey1 to Key:ExpMod2SoftKey60 exp. module 2 keys 1 to 60
 - Key:ExpMod3SoftKey1 to Key:ExpMod3SoftKey60 exp. module 3 keys 1 to 60
-



Note: The phone ignores expansion module keys that are not present on the expansion module such as key 40 on a 536M.

Volume and Voice path control

- Key:VolDwn Decrease button
 - Key:VolUp Increase button
 - Key:Headset Headset
 - Key:Speaker Speaker
 - Key:Mute Mute
-



Note: for both keys (headset and speaker) the behaviour is as if the "speaker/headset" button is pressed, and it does not switch to headset for "Headset" key event or to speaker for "Speaker" key event.

Telephony

- Key:Xfer Transfer
- Key:Conf Conference
- Key:Hold Hold
- Key:Redial Redial
- Key:Callers Callers List
- Key:Services Services
- Key:Intercom Intercom
- Key:Directory Directory
- Key:Options Options
- Key:Save Save

- | | |
|-----------------|-----------|
| • Key:Delete | Delete |
| • Key:Goodbye | GoodBye |
| • Key:Voicemail | Voicemail |
-

→ Note: Since the phones do not have physical keys for Pickup and Park, those features will be only available if they are mapped to a programmable or soft key

Navigation (not available on 6739i)

- | | |
|----------------|----------------------|
| • Key:NavUp | Navigation up key |
| • Key:NavDwn | Navigation down key |
| • Key:NavLeft | Navigation left key |
| • Key:NavRight | Navigation right key |

Example:

This example asks the phone to display the phone directory.

```
<AastraIPPhoneExecute>
<ExecuteItem URI = "Key:Directory"/>
</AastraIPPhoneExecute>
```

4.6 WAV FILE STREAMING

The phone has the capability to stream a wav file from a TFTP or a HTTP server. In order to limit bandwidth fluctuations, the phone buffers 4 seconds of audio data (or the complete file) before playing the audio.

The Wav command follows the configured phone behavior for the audio path (speaker, headset and handset) and supports volume adjustments.

→ Note: The wav file is played only if the phone is idle.

The user can abort the streaming with:

- Goodbye key
- Soft 'Drop' key
- On hook (when handset active)
- Selecting a line

The beginning and the end of the streaming trigger the following action uris:

- action uri incoming/connected at the beginning of the streaming
- action uri onhook/disconnected at the end of the streaming (end of the file or aborted by the user)

As the phone displays a "Wav streaming" screen, the beginning of the streaming destroys the current XML display so diverting the action uri incoming and onhook is the only way to regain control for the XML application.

The typical use for this feature is a voicemail application or podcasts.

→ Note: Paging will not interrupt the streaming unless barge-in is set.

4.6.1 XML COMMANDS

The phone supports 2 AastraIPPhoneExecute commands. 'Wav.Play' and 'Wav.Stop'.

XML Command: Wav.Play

This command initiates the streaming of a WAV file to the phone.

Syntax:

```
Wav.Play:[v]:[tftp://|http://[username[:password]@]<host>[:port][/<path>]/file
```

Where v is the volume level of the audio path from 0 (lowest level) to 9 (highest level), this volume level overrides the current configured volume level of the phone.

Notes:



- The default mode is HTTP and the default port for HTTP is 80
- HTTPS is not supported.

Examples:

```
<ExecuteItem URI="Wav.Play:tftp://10.30.101.26/example.wav"/>
<ExecuteItem URI="Wav.Play:5:http://10.30.101.26/example.wav"/>
<ExecuteItem URI="Wav.Play:http://10.30.101.26:8080/example.wav"/>
<ExecuteItem URI="Wav.Play:2:http://user:password@10.30.101.26/sample.wav"/>
<ExecuteItem URI="Wav.Play:7:10.30.101.26/example.wav"/>
```

The last example is equivalent to

```
<ExecuteItem URI="Wav.Play:7:http://10.30.101.26/example.wav"/>
```

As HTTP is the default protocol.

XML Command: Wav.Stop

This command will abort WAV streaming.

Syntax:

```
Wav.Stop:
```

Example:

```
<ExecuteItem URI="Wav.Stop:"/>
```

4.6.2 FILE FORMAT

- The phones support **only** the following file format:
- Wav file
- G.711 µ-law and a-law Codec
- 20 ms packet size
- Mono 8KHz

If the format is not supported by the phone, the request is declined.

4.6.3 INTERACTION WITH ACTION URIS

action uri incoming/connected

When the phone starts streaming the wav file, the action uri incoming as well as action uri connected are triggered and the XML variables get the following values.

Variable Name	Value
\$\$SIPUSERNAME\$\$	"Streaming"

Variable Name	Value
\$\$DISPLAYNAME\$\$	“Streaming”
\$\$SIPAUTHNAME\$\$	“Streaming”
\$\$PROXYURL\$\$	“Streaming”
\$\$ACTIVEPROXY\$\$	“Streaming”
\$\$INCOMINGNAME\$\$	Name of the wav file
\$\$REMOTENUMBER\$\$	“”
\$\$LOCALIP\$\$	Local IP address of the phone
\$\$CALLDURATION\$\$	0
\$\$CALLDIRECTION\$\$	Empty

action uri onhook/disconnected

At the end of the streaming (end of file or aborted by user), the action uri onhook is triggered as well as the action uri disconnected and the XML variables get the following values.

Variable Name	Value
\$\$SIPUSERNAME\$\$	“Streaming”
\$\$DISPLAYNAME\$\$	“Streaming”
\$\$SIPAUTHNAME\$\$	“Streaming”
\$\$PROXYURL\$\$	“Streaming”
\$\$ACTIVEPROXY\$\$	“Streaming”
\$\$INCOMINGNAME\$\$	Name of the wav file
\$\$REMOTENUMBER\$\$	“”
\$\$LOCALIP\$\$	Local IP address of the phone
\$\$CALLDURATION\$\$	Duration of streaming
\$\$CALLDIRECTION\$\$	Empty

4.7 WAV FILE LOOP PLAYBACK (MELODY)

The phone also has the capability to download a wav file from a TFTP / FTP / HTTP server and play it continuously until it is stopped by a stop command or a user intervention.

Unlike the “Wav” streaming commands the file is first downloaded from the server and then played in loop locally on the phone.

For performance reasons, up to 8 wav files can be cached on the phone to allow a faster playback for following commands. The cache is limited to 400k and lost at reboot.

This command follows the configured phone behavior for the audio path (speaker, headset and handset) and supports volume adjustments.

Notes:



- The wav file is locally played only if the phone is idle.
 - The wav file size is limited to 200K
-

The user can abort the playback with:

- Goodbye key
- Soft 'Drop' key
- On hook (when handset active)
- Selecting a line

Unlike the streaming capability, the beginning and the end of a playback does not trigger any following action uri and the phone display is not changed.



Note: Paging will not interrupt the streaming unless barge-in is set.

4.7.1 XML COMMANDS

The phone supports 2 AastralIPPhoneExecute commands. 'Melody.Play' and 'Melody.Stop'.

XML Command: Melody.Play

This command initiates the download then playback of a WAV file to the phone.

Syntax:

```
melody.Play:[tftp://|ftp://|http://[username[:password]@]<host>[:port][/<path>]  
/file:[v]]
```

Where v is the volume level of the audio path from 0 (lowest level) to 9 (highest level), this volume level overrides the current configured volume level of the phone.

Examples:

```
<ExecuteItem URI="Melody.Play:tftp://10.30.101.26/example.wav"/>  
<ExecuteItem URI="Melody.Play:ftp://user:password@10.30.101.26/example.wav:5"/>  
<ExecuteItem URI="Melody.Play:http://10.30.101.26:8080/example.wav"/>  
<ExecuteItem URI="Melody.Play:http://user:password@10.30.101.26/sample.wav:2"/>
```

XML Command: Melody.Stop

This command will abort the wav file playback.

Syntax:

```
Melody.Stop:
```

Example:

```
<ExecuteItem URI="Melody.Stop:"/>
```

4.7.2 FILE FORMAT

The phones support **only** the following file format:

- Wav file
- G.711 µ-law and a-law Codec

- 20 ms packet size
- Mono 8KHz
- 200 kb

If the format is not supported by the phone, the request is declined.

4.8 DIAL AND DIALLINE URIS

The phone supports 2 URI commands to launch an outgoing call from XML.

- Dial:XXXXX
- DialLine:Y:XXXXX

Where XXXXX is the number/URI to dial and Y is the SIP line number.



Note: The AastraIPPhoneDirectory object does not support the “Dial” and “DialLine” commands.

The difference between Dial and DialLine is that with the DialLine command you can specify which SIP line to use, Dial will use the first available SIP line on the phone.

Dial and DialLine are generic URI and can be used anywhere a URI is requested by an XML object, this can be a custom softkey, an item in a TextMenu.

Although the line range is defined as 1 to 9, you must have a SIP account configured on the line to use the dial tag.

For example, if you configure lines 1 to 4 on a phone using a line value of 5 results in undefined behavior. The range of lines you can use for values is limited to the number of lines that the phone supports.

The following table identifies the number of lines supported on each phone type.

Phone model	Max Line
6730i, 6731i	6
6735i, 6737i, 6739i, 6753i, 6755i, 6757i, 6757iCT, 9143i, 9480i, 9480iCT	9
6863i	2
6865i/6867i/6869i	24

4.9 CRASH AND CONFIGURATION FILES RETRIEVAL

The phone has the capability to upload the last crash file as well as the configuration files to a pre-configured location. This operation can be triggered manually via the Web UI or via the phone (if configured) but also via an XML command.

Example

In the configuration file (aastra.cfg or MAC.cfg)

```
upload system info server: tftp://myserver/path
```

Command

```
<AastraIPPhoneExecute>
<ExecuteItem URI="Command: UploadSystemInfo"/>
</AastraIPPhoneExecute>
```

Sending this command to the phone make the phone uploads the last crash file as well as the configuration files (server.cfg and local.cfg) to the configured server (using TFTP in this example). Uploaded files are indexed by the MAC address, date and time.

TFTP, FTP, HTTP and HTTPS are supported for the upload protocol.

4.10 SPECIAL ATTRIBUTES

4.10.1 BEEP

You can enable or disable a Beep option in all the Mitel XML objects via the Beep attribute in the root tag. When the phone receives an XML object, the Beep notifies the user that an object is being displayed.

This attribute is optional. If the Beep attribute is set to "yes" (i.e. Beep="yes") then it is an indication to the phone to sound a beep when it receives the object. If the Beep attribute is set to "no" (i.e. Beep="no") or not present, then the default behavior is no beep is heard when the object arrives to the phone.

The Beep option can also be enabled or disabled via the configuration files and the Mitel Web UI using the following parameters:

xml beep notification (via configuration files)

XML Beep Support (via the Mitel Web UI see chapter 7.5)

The value set in the configuration files and Mitel Web UI override the attribute you specify in the XML object.

For example, if an AastraIPPhoneStatus object has the attribute of Beep="yes", and you uncheck (disable) the "XML Beep Support" in the Mitel Web UI, the phone does not beep when it receives an AastraIPPhoneStatus object.

4.10.2 TIMEOUT

The Timeout attribute is an optional root tag attribute for all of the current UI XML objects. When the phone receives an XML object with this attribute set it will override the default 45 seconds timeout specified for custom applications.

Setting Timeout to "0" will disable the timeout feature.

This timeout is reset by button presses.

4.10.3 LOCKIN

The LockIn attribute is an optional root tag attribute for all of the current UI XML objects. This attribute allows the XML designer to specify that a screen can not be cancelled.

When a phone receives an UI XML object with the attribute set to "yes" it ignores all events that would cause the screen to exit without using the keys defined by the object.

 **Note:** An incoming call still cancels the "locked" screen as telephony events have priority over XML applications.

Setting LockIn will disable the default timeout feature (45 seconds) unless the Timeout attribute is also set in the root tag.

4.10.4 TRIGGERDESTROYONEEXIT

The triggerDestroyOnExit is an optional root tag attribute for all of the current non-UI XML objects (PhoneStatus, PhoneExecute and PhoneConfiguration). Its default value is "no".

By default, if a UI XML object gets a non-UI XML object as an answer to an exit URI ("Select" on a TextMenu or "Done" on a InputScreen...) the UI XML object is not destroyed and stays on the phone display even if its destroyOnExit tag is set to "yes".

By setting triggerDestroyOnExit to "yes", the previous UI XML object is destroyed if its destroyOnExit tag is set to "yes".

4.11 TEXTMENU USER SELECTION (6735I, 6737I, 6739I, 55I, 57I, 57ICT, 9480I, 9480ICT, 6867I, 6869I)

It is also possible to send information related to a user's choice in a Text Menu.

"Select" and "Dial" system keys use the URI passed in the MenuItem attribute, a custom key might need to know the user selection in the TextMenu, and this is the purpose of the selection attribute.

When a user accesses an arbitrary URI via a custom softkey, the Text Menu will send along a bit of information regarding the user's currently selected option using an optional XML attribute **Selection**.

XML Example

```
<AastraIPPhoneTextMenu destroyOnExit = "yes">
<Title>Parameter Tester</Title>
<MenuItem>
    <Prompt>First Selection</Prompt>
    <URI>http://someserver/somepage.xml</URI>
    <Selection>dataToAppend</Selection>
</MenuItem>
<SoftKey index = "1">
    <Label>Custom Key</Label>
    <URI>http://someotherserver/someotherpage.xml</URI>
</SoftKey>
</AastraIPPhoneTextMenu>
```

When the user selects item 1 and presses softkey 1, the URI requested is **http://someotherserver/someotherpage.xml?selection=dataToAppend**

Notes:



- If a "?" already exists in the URI, then a "&" is used to separate the parameters. Note the parameter name "selection" is automatic. If the **Selection** attribute is omitted, then nothing extra is appended to the URI.
- the **Selection** attribute can be more than one parameter, for instance, the following **Selection** attribute is valid `<Selection>200&action=set</Selection>` (don't forget to escape encode the attribute for the "&").

4.12 TEXTMENU ITEM FORMATTING ON 2 LINES (55I/57I/57ICT/9480I/9480ICT/6735I/6737I)

As XML does not allow formatting characters such as TAB or CR or multiple spaces, it is difficult to create an AastraIPPhoneTextMenu with a controlled formatting.

This paragraph describes ways to achieve some advanced formatting using the unbreakable space character.

php function `format_line()`

```

function format_line($line1,$line2,$style,$offset,$char,$mode='left')
{
# Retrieve phone model
$user_agent=$_SERVER['HTTP_USER_AGENT'];
$value=preg_split("/ MAC:/",$user_agent);

# Get screen size
switch($value[0])
{
    case 'Aastra51i':
    case 'Aastra53i':
    case 'Aastra9143i':
    case 'Aastra6730i':
    case 'Aastra6731i':
        $length='16';
        break;
    case 'Aastra9480i':
    case 'Aastra9480iCT':
        $length='21';
        break;
    case 'Aastra55i':
    case 'Aastra57i':
    case 'Aastra57iCT':
    case 'Aastra6735i':
    case 'Aastra6737i':
        $length='24';
        break;
    default:
        $length='24';
        break;
}

# Adjust with the style
switch($style)
{
    case 'none':
    case 'radio':
        $length--;
        break;
    default:
        $length-=4;
        break;
}

# Unbreakable space
$nbsp=chr(0xa0);

# Pad the the first line with regular spaces
switch($mode)
{
    case 'center':
        $line=str_pad($line1,$length-$offset,$char,STR_PAD_BOTH);
        break;
    case 'right':
        $line=str_pad($line1,$length-$offset,$char,STR_PAD_LEFT);
        break;
    default:
        $line=str_pad($line1,$length-$offset,$char,STR_PAD_RIGHT);
        break;
}

# Crop the line to the correct length (-1 for wrap-space)
$line=substr($line,0,($length-$offset));

```

```

# Append a space so it can wrap to line two, and two non-break spaces to pad
below the icon
if($line2!='')
{
    $line.=' '.str_repeat($nbsp,$offset);
    switch($mode)
    {
        case 'center':
            if($char==chr(0xa0))      $line.=str_repeat($char,($length-
$offset-strlen($line2))/2).$line2;
            else                      $line.=str_pad($line2,$length-$offset-
1,$char,STR_PAD_BOTH);
            break;
        case 'right':
            $line.=str_repeat($char,$length-$offset-
strlen($line2)+1).$line2;
            break;
        default:
            $line.=$line2;
            break;
    }
}

# Return formatted prompt
return($line);
}

```

Parameters

- line1 string to be displayed on line 1
- line2 string to be displayed on line 2 (can be empty)
- style TextMenu style (none/numbered/radio)
- offset Integer represents the offset for the second line (size of the icon)
- char Character to use for the padding, space is supported.
- mode Optional padding mode ("left", "right", "center"), "left" is the default value.

Examples

2 lines left justified with double size icon

format_line('Line 1','Line 2','none',2,'');

generated with the 'envelope' icon.



1 line centered with '-' padding

format_line('Line 1','','none',0,'-','center');



PHP SDK


This function has been embedded in the XML SDK (fully described in chapter 13) within the AastralIPPhoneTextMenu constructor.

The method addEntry now supports an array for the menu item prompt parameter with

- 0=>Line1
- 1=>Line2
- 2=>Offset
- 3=>Padding character
- 4=>Mode

Example with the PHP SDK

```
require_once('AastraIPPhoneTextMenu.class.php');
$menu = new AastraIPPhoneTextMenu();
$menu->setTitle('Title');
$menu->setDestroyOnExit();
$menu->setWrapList();
$menu->setStyle('none');
$menu->addEntry(
    array( 'John Doe',
           '12/22/09 at 2:23 PM',
           2,
           ' ',
           'left'),
    'http://myserver.com/script.php?choice=1',
    '',
    '1');
$menu->addEntry(
    array( 'John Doe',
           '11/22/09 at 1:23 PM',
           2,
           ' ',
           'left'),
    'http://myserver.com/script.php?choice=2',
    '',
    '1');
$menu->addSoftkey('1', 'Select', 'SoftKey:Select');
$menu->addSoftkey('6', 'Exit', 'SoftKey:Exit');
$menu->addIcon('1', 'Icon:Envelope');
$menu->output();
```

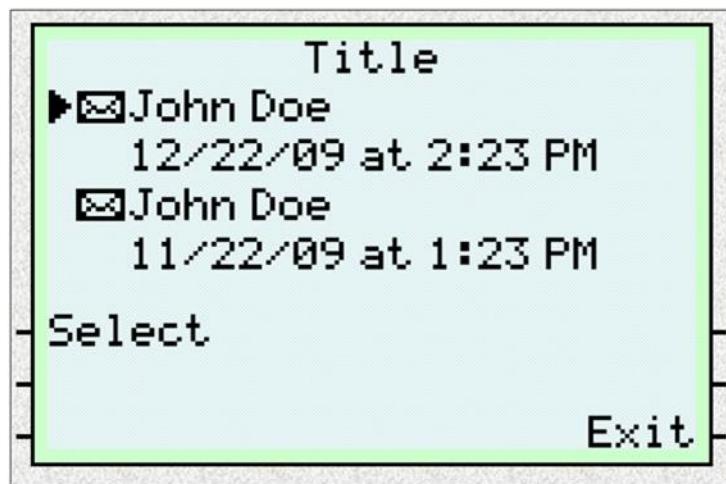

4.13 “SELECT” AND “DIAL” IN THE SAME TEXTMENU OBJECT

The only way to have a “Select” and “Dial” keys in the same text menu, the only option is to use “Dial” as a system command and mimic “Select” with a custom key.

```
<AAstraIPPhoneTextMenu destroyOnExit = "yes">
<Title>Dial and Select</Title>
<MenuItem>
<Prompt>First Selection</Prompt>
<URI>200</URI>
<Selection>200</Selection>
</MenuItem>
<MenuItem>
<Prompt>Second Selection</Prompt>
<URI>201</URI>
<Selection>201</Selection>
</MenuItem>
<SoftKey index = "1">
<Label>Dial</Label>
<URI>SoftKey:Dial</URI>
</SoftKey>
<SoftKey index = "2">
<Label>Select</Label>
<URI>http://myserver.com/script.php</URI>
</SoftKey>
</AAstraIPPhoneTextMenu>
```

When the user selects item 1 and presses

Softkey 1, the phone dials 200

Softkey 2, the requested URI requested is <http://myserver.com/script.php?selection=200>

4.14 “SELECT”, “DIAL” AND “DIAL2” BEHAVIOR IN A TEXTMENU OBJECT

The following table describes what actions will be performed for each possible combination of items and actions in a <MenuItem>.

MenuItem Content	Select Softkey	Offhook	Dial2 Softkey	Dial Softkey
<URI>http://XYZ.</URI>	GET(http://XYZ)	-	-	Dial(http://XYZ)
<Dial>123</Dial>	-	Dial(123)	Dial(123)	-
<URI>http://XYZ</URI> <Dial>123</Dial>	GET(http://XYZ)	Dial(123)	Dial(123)	Dial(http://XYZ)
<URI>Dial:456</URI> <Dial>123</Dial>	Dial(456)	Dial(123)	Dial(123)	Dial(Dial:456)



Note: the main purpose of the “Dial” tag in the TextMenu is to allow the Mitel SIP phones which do not support custom softkeys to dial a number going off-hook.

4.15 REFRESH OF AN XML PAGE

All XML UI objects have the ability to be refreshed. This is accomplished by adding a Refresh setting to the HTTP header. This setting comprises two parameters:

- a time in seconds
- a URL.

The Refresh setting is set by the XML application and it is up to the application to decide which objects they want to refresh. So, it is an optional setting.

If the setting appears, then both parameters must be set for the Refresh to work.

The format of the HTTP header is:

```
Refresh: timeout; url=page to load
```

Example

```
Refresh: 3; url=http://10.50.10.140/update.xml
```

All of the parameters are mandatory.

With php you will have to use the `header` command in your script.

```
header("Refresh: 1; url= http://10.50.10.140/update.xml");
```

4.16 HTTP HEADERS FORMAT FOR A PHONE HTTP GET

When the Mitel SIP performs a GET to an HTTP server, it sets multiple variables in the HTTP header:

- 'User-Agent' providing information on the characteristics of the phone (type, MAC address, firmware),
- 'X-Aastra-ExpMod1' providing information on the expansion module 1 if present,
- 'X-Aastra-ExpMod2' providing information on the expansion module 2 if present,
- 'X-Aastra-ExpMod3' providing information on the expansion module 3 if present,
- 'Accept-Language' providing information on the language used on the phone.

Example:

```
User-Agent: Aastra57i MAC:00-08-5D-19-94-B7 V:2.3.1.26-SIP
Accept-Language: en
X-Aastra-ExpMod1: 560M
X-Aastra-ExpMod2: 536M
```

4.16.1 USER-AGENT

The User-Agent header includes:

- The type of phone
- The MAC address of the phone
- The firmware version of the phone

Usually, the HTTP server is able to retrieve the User Agent parameters. The Mitel SIP phones send the following string for the User-Agent.

Phone_Model[space]MAC:-XX-XX-XX-XX-XX-XX[space]V:Version

This allows the application to adapt to the type of phone it is dealing with but also allows to design a single application to provide XML (for the phones) and HTML (for a web browser).

The following source code is a php example that can be used to decode the User-Agent header sent by a Mitel SIP phone.

```

function Decode_HTTP_header()
{
$user_agent=$_SERVER["HTTP_USER_AGENT"];
if(stristr($user_agent,"Aastra"))
{
    $value=preg_split("/ MAC:/,$user_agent);
    $end=preg_split("/ /,$value[1]);
    $value[1]=preg_replace("/\-/,"",$end[0]);
    $value[2]=preg_replace("/V:/,"",$end[1]);
}
else
{
    $value[0]="Unknown";
    $value[1]="NA";
    $value[2]="NA";
}
$header['model']=$value[0];
$header['mac']=$value[1];
$header['firmware']=$value[2];

return($header);
}

```

This function returns an array with

Array['model'] is the phone model

- “Aastra9143i”,
- “Aastra9480i”,
- “Aastra9480iCT”,
- “Aastra6730i”,
- “Aastra6731i”,
- “Aastra6735i”
- “Aastra6737i”
- “Aastra6739i”
- “Aastra53i”,
- “Aastra55i”,
- “Aastra57i”
- “Aastra57iCT”
- “Aastra6863i”
- “Aastra6865i”
- “Aastra6867i”
- “Aastra6869i”

Array['mac'] is the MAC address

Array['firmware'] is the firmware version

Example of execution

- Array['model'] => Aastra6869i
- Array['mac'] => 00085D031C81
- Array['firmware'] => 4.0.0.66

4.16.2 X-AAASTRA-EXPMODI

If the phone has expansion modules (6735i, 6737i, 6739i, 6753i, 6755i, 6757i, 6757i CT, 6865i, 6867i or 6869i) connected, the phone sends this information in proprietary http headers:

- X-Aastra-ExpMod1
- X-Aastra-ExpMod2
- X-Aastra-ExpMod3

The header is sent only if an expansion module is present at the given position, the possible values are:

- 536M for the 36 keys paper labeled expansion module (6735i, 6737i, 6739i, 53i, 55i, 57i, 57i CT)
- 560M for the 60 keys self labeled expansion module (6735i, 6737i, 6739i, 55i, 57i, 57i CT)
- M680i for the 16 keys paper labeled expansion module (6865i/6867i/6869i)
- M685i for the 3x28 keys self labeled expansion module (6865i/6867i/6869i)

The following source code is a php example that can be used to decode the X-Aastra_ExpMod header sent by a Mitel SIP phone.

```
function Decode_HTTP_X_AastrA()
{
$header[ 'module1' ]=$_SERVER[ "HTTP_X_AASTRA_EXPMOD1" ];
$header[ 'module2' ]=$_SERVER[ "HTTP_X_AASTRA_EXPMOD2" ];
$header[ 'module3' ]=$_SERVER[ "HTTP_X_AASTRA_EXPMOD3" ];

return ($header);
}
```

Example of execution

A Mitel 57i with one 560M in position 1 and a 536M in position 2.

- Array['module1'] => 560M
- Array['module2'] => 536M
- Array['module3'] => Empty string

4.16.3 ACCEPT-LANGUAGE

The phone also sends the standard **Accept-Language** in the headers request which describes the language of the phone using 2 characters.

To access it using php the syntax is `$_SERVER["HTTP_ACCEPT_LANGUAGE"]`

Example

```
echo $_SERVER[ "HTTP_ACCEPT_LANGUAGE" ]
returns "en"
```

4.17 SOME DEVELOPMENT GUIDELINES

There are some simple rules that you should follow when you develop XML applications for the Mitel SIP phones.

Don't forget the "Exit" key when you use custom softkeys

Place custom softkeys as they are for the standard objects, also it is better to use the same labels. The Exit key should preferably be placed in position 6.

Setting **destroyOnExit** attribute to "yes" is always preferable when you write complex applications as it is the only way to properly control the pages that are stacked in the phone.

Avoid using the Directory Object; TextMenu object with custom keys is much more flexible.

If you want to access data from the internet, it is preferable to use a RSS feed or a SOAP interface than Web scraping as Web sites frequently change their layout interface.

For XML applications using data from the Internet, if they are not real time you might consider to “cache” the data on the server and update them on a regular basis (a weekly update is necessary for Movie schedules but a 10 minutes update might be necessary for a weather application for severe conditions).

As the XML objects are limited to 10000 bytes, you might sometime hit this limit for a complex TextMenu with a lot of custom keys and custom icons. Don't forget to use the `base` attribute in the `MenuItem` object as it is a good way to reduce the size of the object.

5 URL FORMAT AND VARIABLES

5.1 URL FORMAT

To access to an XML application the phone performs a HTTP (or HTTPS) GET on a URL. The supported syntax is:

`http://host[:port]/dir/file`

or

`https://host[:port]/dir/file`

where:

- host is the hostname or IP address of the Web server supporting the XML application
- port is the port number the phones is using for the HTTP request.



Note: If the port is not specified, the phone uses port 80.

The phone also supports the following URLs:

- Dial: XXXXX to have the phone dial XXXXX
- DialLine:X:YYYYY to have the phone dial YYYYY (phone number or URI) using SIP line X see chapter 4.7 for more details on this feature..
- Led:XXXXX=on/off/slowflash/fastflash to change the status the LED associated to the XXXXX key if the key is configured as an XML key. See chapter 4.2 for more details on the LED control.
- Key:XXXXX to simulate a keypress on the phone. See chapter 4.5 for more details on keypress emulation.

5.2 URL VARIABLES

The phones support system variables in the HTTP URL to pass dynamic data to the XML applications.

The variables are in the form `$$VARIABLENAME$$` and the following variables are supported:

Variable Name	Value
SIPUSERNAME	Active line user name
DISPLAYNAME	Active line display name
SIPAUTHNAME	Active line SIP authentication name
PROXYURL	Active line SIP proxy
ACTIVEPROXY	Active line active SIP proxy
INCOMINGNAME	Caller-ID name of the current incoming call
REMOTENUMBER	Remote party phone number (incoming or outgoing)
LOCALIP	Phone local IP address
CALLDURATION	Duration of the current call in seconds
CALLDIRECTION	Direction of the current call ("Incoming" or "Outgoing")
REGISTRATIONCODE	3 digits registration code for the registration coming from the SIP Proxy server.

Variable Name	Value
REGISTRATIONSTATE	Registration state available from the Registration event, values are: "REGISTERED", "UNREGISTERED", "EXPIRED", "REFUSED", "TIMEOUT".
LINESTATE	Information on Disconnect event, values are "IDLE" "DIALING" "CALLING" "OUTGOING" "INCOMING" "CONNECTED" "CLEARING"

At the time of the HTTP call, the variables are replaced with the value of the appropriate variable.

The variables are available in all the HTTP URL for programmable/soft keys as well as for the action URI. They can also be used in the XML objects themselves (TextMenu, InputScreen...) but not in a PhoneExecute command.

Example

For example, if the administrator specifies an XML softkey with the value:

`http://10.50.10.140/script.pl?name=$$SIPUSERNAME$$`

This softkey executes a GET on:

`http://10.50.10.140/script.pl?name=42512`

Assuming that the SIP username of the specific line is 42512.

The variables can be used, for instance, in a context where the phone has multiple SIP registrations and the XML application need to know which SIP registration the phone is currently using.



Note: the value of a variable depends on the status of the phone, if the variable has no meaning in the current status; the phone sends an empty string. For example, if the URL is "`http://myserver.com/script.pl?number=$$REMOTENUMBER$$&key=5`", the phone will call "`http://myserver.com/script.pl?number=&key=5`" if the phone is idle.

5.2.1 VARIABLES RELATED TO THE ACTIVE LINE

The following variables are related to the active line

- `$$SIPUSERNAME$$` Active line user name
- `$$DISPLAYNAME$$` Active line display name
- `$$SIPAUTHNAME$$` Active line SIP authentication name
- `$$PROXYURL$$` Active line SIP proxy
- `$$ACTIVEPROXY$$` Active line active SIP proxy

They can be used anywhere where the active line is meaningful for your XML application but they should not be used with outside event action uris such as action uri poll or action uri xml sip notify as the active line can be anything when the event is processed.

5.2.2 VARIABLES RELATED TO THE CURRENT CALL

The following variables are related to the current call.

- **\$\$INCOMINGNAME\$\$** Caller-ID name of the current incoming call
- **\$\$REMOTENUMBER\$\$** Remote party phone number (incoming or outgoing)
- **\$\$CALLDURATION\$\$** Duration of the current call in seconds
- **\$\$CALLDIRECTION\$\$** Direction of the current call ("Incoming" or "Outgoing")
- **\$\$LINESTATE\$\$** Information on Disconnect event

List of values for the LINESTATE variable

LINESTATE VALUE	Meaning	Disconnected uri
IDLE	The phone is idle	N/A
DIALING	The phone is offhook and ready to dial	N/A
CALLING	A SIP INVITE has been sent but no response has been received.	An error occurred during the call.
OUTGOING	Remote party is ringing.	The call was canceled.
INCOMING	Local phone is ringing.	The call was missed or canceled.
CONNECTED	The parties are talking.	Call was successful
CLEARING	Call has been released but not acknowledged.	N/A

These variables are initialized at the beginning and at the end of the call which means for instance that the call duration variable is reset to '0' after the phone goes on-hook, the last moment to retrieve the value is when you use the action uri onhook or action uri disconnected.

5.2.3 USAGE WITH ACTION URIS

The following table details when the variables are meaningful with an action URI.

	startup	registered	registration	onhook	offhook	incoming	outgoing	disc.	poll	notify
SIPUSERNAME	X	X	X	X	X	X	X	X		
DISPLAYNAME	X	X	X	X	X	X	X	X		
SIPAUTHNAME	X	X	X	X	X	X	X	X		
PROXYURL	X	X	X	X	X	X	X	X		
INCOMINGNAME				X ¹		X			X ²	X ²

¹ only if the previous call was an incoming call

² only if the phone is in the "connected" state answering an incoming call

	startup	registered	registration	onhook	offhook	incoming	outgoing	disc.	poll	notify
REMOTENUMBER				X		X	X		X ¹	X ³
LINESTATE				X				X	X	X
LOCALIP	X	X	X	X	X	X	X		X	X
CALLDURATION				X	X				X	X
CALLDIRECTION				X	X	X	X	X	X	X
REGISTRATIONSTATE		X	X						X	
REGISTRATIONCODE		X	X						X	

5.2.4 PHONE STATE

The following table details when the variables are meaningful for a programmable/soft key depending on the phone state.

	idle	connected	incoming	outgoing
SIPUSERNAME	X	X	X	X
DISPLAYNAME	X	X	X	X
SIPAUTHNAME	X	X	X	X
PROXYURL	X	X	X	X
ACTIVEPROXY	X	X	X	X
INCOMINGNAME		X ²	X	
REMOTENUMBER		X	X	X
LINESTATE	X			
LOCALIP	X	X	X	X
CALLDURATION		X		
CALLDIRECTION		X		
REGISTRATIONSTATE				
REGISTRATIONCODE				

¹ only if the phone is in the “connected” state

² only if the user has answered the current call.

5.3 HTTPS

If you want to secure the communication between the Mitel SIP Phone and your HTTP server hosting the XML applications, you can use HTTPS instead of HTTP.

Note:  HTTPS provides a reasonable level of security to your XML applications for man-in-the-middle attacks but you must still make sure that the HTTP server itself is secure, only the data transport is protected by HTTPS.

To allow HTTPS connections, the web server must have a root certificate; this certificate must be signed by a certificate authority of one form or another, which certifies that the certificate holder is indeed the entity it claims to be. The certificate can also be self-signed.

Mitel SIP phones come with the signing certificates of

- Verisign
- GeoTrust
- Thwate

So, only certificates signed by these Certification Authorities can be verified by the phone. Certificates that are signed by other providers will not verify on the phone but to overcome this problem, the phone can be loaded with user certificates.

The following parameters allow HTTPS validation configuration.

```
https validate certificates
https validate expires
https validate hostname
https user certificates
```

Note:  if you have http validate expires enabled, you must make sure that the phone clock is yet prior to using HTTPS.

When a certificate is rejected the phone displays "Bad Certificate" on the fifth line of the display for large screen phones (6735i/6737i/6739i/55i/57i/57iCT/9480i/9480iCT) and on the third line for small screen phones (6730i/6731i/6753i/9143i).

Note:  For more information regarding HTTPS and associated certificates please refer to the x.509 standard at <http://www.ietf.org/html.charters/pkix-charter.html>.

5.3.1 USER CERTIFICATES

The user has the option to upload its own certificates onto the phone. These certificates must be uploaded in a single file in the PEM format.

The user certificates are persistent between firmware upgrades but are deleted during a factory default.

User provided certificates are downloaded as part of the boot time configuration downloads and be based on a filename specified in http user certificates. The certificate file must be located in the configuration server directory.

Note:  In order to install a root certificate using HTTPS, the user must first disable verification, since the certificate will not be in the validation chain yet.

Example

Here is an example of a self-signed certificate; it is stored in a file called "mycertificate.pem" located in the configuration server directory.

```

-----BEGIN CERTIFICATE-----
MIIDyjCCAzOgAwIBAgIBADANBgkqhkiG9w0BAQQFADCByTELMAkGA1UEBhMCLSOx
EjAQBgNVBAgTCVNvbWVTdGF0ZTERMA8GA1UEBxMIU29tZUNpdHkxGTAXBgNVBAoT
EFNvbWVPCmdhbm16YXRpb24xHzAdBgNVBAsTF1NvbWVPCmdhbm16YXRpb25hbFVu
aXQxEzARBgNVBAMUCm15X3RyaXhib3gxHjAcBgkqhkiG9w0BCQEWD3Jvb3RAbX1f
dHJpeGJveDAeFw0wODA2MTAxOTM4MzZaFw0wOTA2MTAxOTM4MzZaMIG1MQswCQYD
VQQGEwItLTESMBAGA1UECBMJU29tZVN0YXR1MREwDwYDVQQHEwhTb211Q210eteZ
MBcGA1UEChMQU29tZU9yZ2FuaXphdG1vbjEfMB0GA1UECxMWU29tZU9yZ2FuaXph
dG1vbmFsVW5pdDETMBEGA1UEAxQKbx1fdHJpeGJveDEeMBwGCSqGSIb3DQEJARYP
cm9vdEBteV90cm14Ym94MIGfMA0GCSqGS1b3DQEBAQUAA4GNADCBiQKBgQDUzalm
3ienPcp1zmfp2jT7oGnVoSfkMoS7n7kLpWTUyWpmEfrleetVoRoaGL5j+zTwaAjO
lp9apC17ne0qRC2BuPDyzkVE4f30Vn2pmlu5yYDoi+yRE1NFyVLbQwLFTffUGwQ
kfC7YabPdbjQ87/XU6/AhuquET0n3nE9NwQhwIDAQAB04IBBjCCAQIwHQYDVR0O
BBYFE6XN1xAlZxfYbmucEN2VUyOTIfNMIHSBgnVHSMEgcowgceAFE6XN1xAlZxf
YbmucEN2VUyOTIfNoYGrpIGoMIG1MQswCQYDVQQGeWItLTESMBAGA1UECBMJU29t
ZVN0YXR1MREwDwYDVQQHEwhTb211Q210eTEZMBcGA1UEChMQU29tZU9yZ2FuaXph
dG1vbjEfMB0GA1UECxMWU29tZU9yZ2FuaXphdG1vbmFsVW5pdDETMBEGA1UEAxQK
bX1fdHJpeGJveDEeMBwGCSqGS1b3DQEJARYPcm9vdEBteV90cm14Ym94ggEAMawG
A1UdEwQFMAMBaf8wDQYJKoZIhvcNAQEEBQADgYEANDtuygpPobd7ICWnlor+UEJ5
3Tei51HDN2oKp6SaF3uQCUJUMMJwB9/i/rVa/c8010qf06/MMCU6/VWS9uZspBvm
IJWaFpu8+VcbGH63KA61FSqKHSN+8ZR10E58FgmHzEXwJr4P4Hb59FrpkUwjDRF
86UP/ZyBYhH7EWtIJhA=
-----END CERTIFICATE-----

```

The following lines must be added to the phone configuration files ('aastra.cfg' or 'MAC.cfg') in order to use HTTPS for XML requests.

```
https user certificates: mycertificate.pem
```

5.3.2 CONFIGURATION

Using configuration files

Parameter – https validate certificates	Configuration Files aastra.cfg, <mac>.cfg
Description	When this parameter is set to 1 the https client will perform validation on SSL certificates before they are accepted.
Format	Boolean (0=disabled, 1=enabled)
Default Value	1 (enabled)
Range	0 or 1
Example	https validate certificates : 1
Parameter – https validate expires	Configuration Files aastra.cfg, <mac>.cfg
Description	When this parameter is set to 1 the https client will verify that a certificate has not expired prior to accepting it.
Format	Boolean (0=disabled, 1=enabled)
Default Value	1 (enabled)

Range	0 or 1
Example	https validate expires : 1

Parameter – https validate hostname	Configuration Files aastrra.cfg, <mac>.cfg
Description	When this parameter is set to 1 the https client will verify the commonName of a certificate matches the server it is connecting to prior to accepting the certificate
Format	Boolean (0=disabled, 1=enabled)
Default Value	1 (enabled)
Range	0 or 1
Example	https validate hostname : 1

Parameter – https user certificates	Configuration Files aastrra.cfg, <mac>.cfg
Description	This parameter is a file name on the configuration server that contains user provided certificates in PEM format. These certificates will be used to validate peer certificates.
Format	String
Default Value	Empty
Range	N/A
Example	https user certificates : mycertificate.pem


Web UI configuration

The HTTPS parameters can also be configured using the WebUI.

Select Network.

Enter the parameters.

Click .

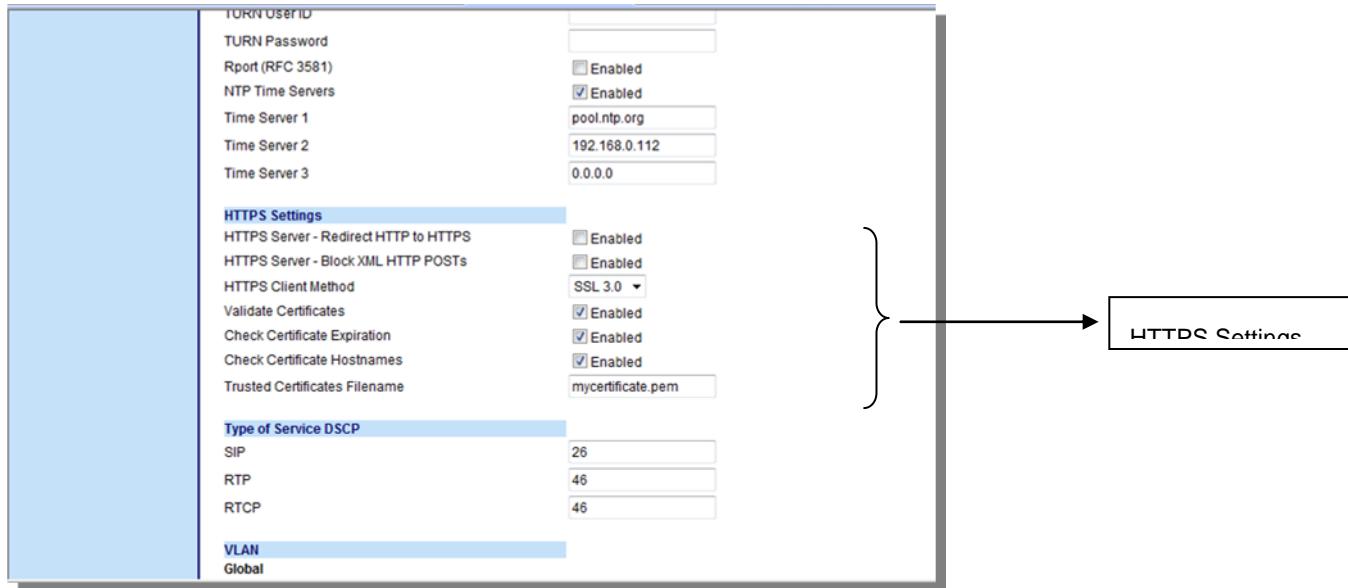

→ **Note:** Depending on the changes performed, you might have to reboot the phone to apply them.

5.4 XML OBJECTS PUSHED TO THE PHONE

The phone can request an XML object via HTTP GET, or an object can be pushed to the phone via a POST. The phone parses this object immediately upon receipt and displays the information to the screen.

The HTTP POST packet must contain an “xml=” line in the message body. The string to parse is located after the equals sign in the message. HTML forms that post objects to the phone must use a field named “xml” to send their data. Any applications that construct HTTP packets on the fly must also specify this line.

→ **Note:** the content of the HTTP POST is not url-encoded.

Sample php source code

Below is a sample php source code that sends an XML object to a Mitel phone. In this example, the phone is located at 192.168.0.150 and the server pushing the XML object at 192.168.0.112.

```

<?php
#
function push2phone($server,$phone,$data)
{
$xml = "xml=".$data;

$post = "POST / HTTP/1.1\r\n";
$post .= "Host: $phone\r\n";
$post .= "Referer: $server\r\n";
$post .= "Connection: Keep-Alive\r\n";
$post .= "Content-Type: text/xml\r\n";
$post .= "Content-Length: ".strlen($xml)."\r\n\r\n";

$fp = @fsockopen ($phone, 80, $errno, $errstr, 5);
if($fp)
{
    fputs($fp, $post.$xml);
    flush();
    fclose($fp);
}
}

#####
$xml = "<AastraIPPhoneTextScreen>\n";
$xml .= "<Title>Push test</Title>\n";
$xml .= "<Text>This is a test for pushing a screen to a phone. It is a way to
demonstrate that we can push XML objects to an Mitel Phone.</Text>\n";
$xml .= "</AastraIPPhoneTextScreen>\n";
push2phone("192.168.0.112","192.168.0.150",$xml);
?>

```

Sample perl source code

Below is a sample perl source code that sends an XML object to an Mitel phone. In this example, the phone is located at 192.168.0.150.

```

#!/c:/perl/bin/Perl.exe
# Create a user agent object
use LWP::UserAgent;
use LWP::ConnCache;
use HTTP::Request::Common;
my $ua = LWP::UserAgent->new(agent => 'Mozilla/4.0 (compatible; MSIE 5.5;
Windows 98)');

$ua->conn_cache(LWP::ConnCache->new());
$ua->request(
    POST 'http://192.168.0.150'
        ,Content_Type => 'application/x-www-form-urlencoded'
        ,Content          => 'xml=<AastraIPPhoneTextScreen><Title>Push
test</Title><Text>This is a test for pushing a screen to a phone. It is a way to
demonstrate that we can push XML objects to an Mitel
Phone.</Text></AastraIPPhoneTextScreen>');

```

Notes:



- To accept a pushed page the “XML Push Server List” phone parameter must be configured with the list of the HTTP servers allowed pushing a page.
- When a page is pushed to the phone the MWI lamp blinks to indicate a new message to the phone.

When a XML object is pushed to the phone, the phone acts like a Web server listening to TCP port 80, which means that if the phone is behind a NAT and the server on the other side of the NAT, which is a typical configuration for a remote user, the port 80 must be forwarded to the IP phone at the router level.

6 ACTION URIS

Configuration parameters have been introduced to configure the phone to make an HTTP GET based on events, these events are:

- | | |
|----------------------------|-------------------------------|
| • End of the boot sequence | action uri startup |
| • Successful registration | action uri registered |
| • On-hook | action uri onhook |
| • Off-hook | action uri offhook |
| • Incoming call | action uri incoming |
| • Outgoing call | action uri outgoing |
| • Time based | action uri poll |
| • SIP Notify | action uri xml sip notify |
| • Connect | action uri connected |
| • Disconnect | action uri disconnected |
| • Registration event | action uri registration event |

6.1 CONFIGURATION

A URI can be configured for each type of events; the configuration can be made using:

- The configuration files (aastra.cfg and/or MAC.cfg)
- The Web UI.

See chapter 7.4 for more details on the Web UI Configuration.

Configuration description

These URIs will be configurable via the configuration files using the following parameters.

- **action uri startup:** <URI to GET on startup>
- **action uri registered:** <URI to GET on successful registration>
- **action uri incoming:** <URI to GET on an incoming call>
- **action uri outgoing:** <URI to GET on outgoing call>
- **action uri offhook:** <URI to GET on an off-hook event>
- **action uri onhook:** <URI to get on an on-hook event>
- **action uri connected:** <URI to get on a connect event>
- **action uri disconnected:** <URI to get on a disconnect event>
- **action uri poll:** <URI to get when configured timer expires>
- **action uri poll interval:** <polling interval in seconds for action uri poll>
- **action uri registration event:** <URI to GET on any registration event>
- **action uri xml sip notify:** <URI to get when a aastra-xml SIP notify without content is received by the phone>
- **sip xml notify event:** <Enables or disables the phone to accept an Aastra-xml SIP Notify event>

As described in chapter 5.2 the action URI support variables in their configuration.

Example

action uri startup: <http://myserver.com/startup.php>

action uri incoming: [http://myserver.com/incoming.php?number=\\$\\$REMOTENUMBER\\$\\$](http://myserver.com/incoming.php?number=$$REMOTENUMBER$$)

sip xml notify event: 1

action uri xml sip notify: http://myserver.com/notify.php

6.2 ACTION URI DETAILED BEHAVIOR

Action uris are available on all the lines and line appearance of the phone so passing the system variables \$\$SIPUSERNAME\$\$ or \$\$SIPAUTHNAME\$\$ and \$\$PROXYURL\$\$ or \$\$ACTIVEPROXY\$\$ will define which line has triggered the action uri.

Notes:



The action uri GET requests are non blocking.

If the GET request triggered by an action uri fails, the phone does not display any error message.

6.2.1 ACTION URI OFFHOOK

The offhook uri is triggered only when the user performs one of the following actions:

- Release the handset
- Press a line key
- Press the Speaker/Headset keyNiSeVa03

This means that the offhook uri is not triggered when the user presses a speeddial key even if the phone goes off-hook and dials a number. Also if the user directly dials a number and press the “dial” key the action uri is not triggered (but the outgoing uri is)

6.2.2 ACTION URI ONHOOK

The *action uri onhook* is triggered at the end of any active call:

- The user presses the ‘**Goodbye**’ key
- The user hangs up the handset after a connected call
- The user drops an established call pressing the “drop” softkey
- After a completed transfer (blind or monitored)
- The other party hangs up.



Note: The *onhook* event is a subset of the *disconnect* event, you should avoid to configure both action uri as most of the time they will both be called at the same time.

6.2.3 ACTION URI INCOMING

The *action uri incoming* is triggered each time there is an incoming call presented to the phone and processed to make the phone ring. If the incoming call includes an auto-answer info message (intercom mode), the action uri incoming is triggered as well.



Note: the action uri incoming is not triggered if the phone is call forwarded or is in DND mode or if call waiting is disabled (and the phone in a non idle mode).

6.2.4 ACTION URI OUTGOING

The *action uri outgoing* is triggered each time an outgoing call is performed by the phone (SIP INVITE message sent).



Note: the action uri outgoing is also triggered when the user makes a second call to perform a transfer or a conference.

6.2.5 ACTION URI CONNECTED

The *action uri connected* is triggered each time the phone transitions to a connected state. This includes regular phone calls but also Intercom, Paging, RTP streaming or Play Wav.

Notes:

The action uri connected is also triggered when the second leg of a 3-way conference is established.



During SLA calls, the phone uses the Action URI Connected parameter when the line is seized before the caller dials out

SCA and BLA calls on hold trigger the action uri connected, since the retrieval is a second call performed by the phone and the phone cannot link the retrieved call with the earlier held call.

6.2.6 ACTION URI DISCONNECTED

The *action uri disconnected* is triggered when the phone transitions from any active (non idle) call state to idle. This includes regular calls but also Intercom, Paging, RTP streaming or Play Wav.

The difference between action uri disconnected and action uri onhook is that the disconnect event is generated even when the call fails or if a call is not answered.

The action uri disconnect is triggered every time the phone comes back to the idle state where the action uri onhook is triggered only when the phone was on an active call.

The \$\$LINESTATE\$\$ variable provides more information on the reason of the disconnect event.

LINESTATE VALUE	Meaning	Disconnected uri
IDLE	The phone is idle	N/A
DIALING	The phone is offhook and ready to dial	N/A
CALLING	A SIP INVITE has been sent but no response has been received.	An error occurred during the call.
OUTGOING	Remote party is ringing.	The call was canceled.
INCOMING	Local phone is ringing.	The call was missed or canceled.
CONNECTED	The parties are talking.	Call was successful
CLEARING	Call has been released but not acknowledged.	N/A



Note: the action uri disconnected is not triggered if the phone is call forwarded or is in DND mode or if call waiting is disabled (and the phone in a non idle mode).

6.2.7 ACTION URI STARTUP

The *action uri startup* is triggered at the end of the phone boot sequence.

6.2.8 ACTION URI REGISTERED

The *action uri registered* is triggered the first time the phone registers successfully a line to its SIP proxy/registrar.

If the phone has multiple SIP registrations, the action uri registered is triggered for each line.

6.2.9 ACTION URI REGISTRATION EVENT

The *action uri registration* event is triggered every time there is a registration state change, the registration states are:

- Registered
- Unregistered
- Registration timed out
- Registration refused
- Registration expired

The action uri registration event is not triggered when the same event is repeated.

Two URI variables have also been added to complement this feature

- \$\$REGISTRATIONSTATE\$\$
- \$\$REGISTRATIONCODE\$\$

See chapter 5.2 for more details on these variables.

6.2.10 ACTION URI POLL

The *action uri poll* is called each time the configured timer (*action uri poll interval* parameter) expires.

The first timer starts at the end of the phone boot sequence.

6.2.11 ACTION URI XML SIP NOTIFY

The *action uri xml sip notify* is triggered when the phone receives an authorized SIP Notify aastraxml event with an empty content. The XML call is triggered only if the *sip xml notify event* parameter is set to 1 (enabled). See chapter 6.2.11 for more details on the configuration.

If XML content is provided in the SIP NOTIFY, it is processed directly by the phone as it is done for a XML PUSH

If the content is empty in the SIP NOTIFY, the phone automatically triggers a new pre-configured action uri (**action uri xml sip notify**).

Example of a SIP NOTIFY with XML content

```
NOTIFY sip:200@10.30.100.103:5060 SIP/2.0
Via: SIP/2.0/UDP 10.30.100.103:5060;branch=z9hG4bK7bbc1fac;rport
From: <sip:201@10.30.100.103:5060>;tag=81be2861f3
To: Jacky200 <sip:200@10.30.100.103:5060>
Contact: <sip:201@10.30.100.103>
Call-ID: 59638f5d95c9d301
CSeq: 4 NOTIFY
Max-Forwards: 70
Event: aastraxml
Content-Type: application/xml
Content-Length: 115
<AstralPPhoneExecute><ExecuteItem
```

```
URI="http://10.30.100.39/XMLtests/SampleTextScreen.xml"/></AastralPPhoneExecute>
```

When the phone receives the SIP NOTIFY, the XML content is processed as any XML object; in this example, the phone will call <http://10.30.100.39/XMLtests/SampleTextScreen.xml> after reception of the SIP NOTIFY.



Note: The phone supports all the current XML objects with all the existing limitations. For example if an AastralPPhoneExecute is used, the embedded uri(s) cannot be HTTPS based.

Example of a SIP NOTIFY without XML content

```
NOTIFY sip:200@10.30.100.103:5060 SIP/2.0
Via: SIP/2.0/UDP 10.30.100.103:5060;branch=z9hG4bK7bbc1fac;rport
From: <sip:201@10.30.100.103:5060>;tag=81be2861f3
To: Jacky200 <sip:200@10.30.100.103:5060>
Contact: <sip:201@10.30.100.103>
Call-ID: 59638f5d95c9d301
CSeq: 4 NOTIFY
Max-Forwards: 70
Event: aastraxml
Content-Type: application/xml
Content-Length: 0
```

When the phone receives the SIP NOTIFY, it will trigger the action uri xml sip notify if it has been previously configured using the configuration files or the phone Web UI. If the action uri xml sip notify is not enabled, the phone does not do anything.



Note: To ensure that the SIP NOTIFY is coming from a **trusted source**, it is recommended that you enable the Whitelist feature (Whitelist Proxy parameter) on the IP phone. If enabled, and the phone receives a SIP NOTIFY from a server that is NOT on the whitelist, the phone will reject the message.

Asterisk implementation

Asterisk custom SIP Notify messages are configured in 'sip_notify.conf' file in the asterisk root directory, usually '/etc/asterisk/'.

Asterisk does not support custom SIP Notify with XML content. The only way to use the SIP Notify event with Asterisk is to use the Aastraxml event triggerint the action uri xml sip notify.

To do so, the following lines must be added in /etc/asterisk/sip_notify.conf

```
; Astra XML event
[aastraxml]
Event=>aastraxml
Content-Length=>0
```

Then you must restart Asterisk to have the new SIP Notify parsed by Asterisk.

To use it, just send a SIP Notify aastraxml event to a Mitel SIP phone registered to the platform using either the asterisk CLI or the AGI.

```
sip notify aastraxml 200 201....
```

Where 200, 201... are the SIP peers for the Mitel SIP phones.

This will trigger the action uri xml sip notify if it has been enabled and properly configured.

6.3 "ANSWER" AND "IGNORE" KEYS FOR ACTION URI INCOMING

When a UI XML object is displayed as an answer to an action uri incoming, the regular contextual keys ("Answer" and "Ignore") are not displayed as the display is managed by the XML object, the user can only take the call by pressing the blinking line key or go off-hook.

To keep a consistent behavior of the phone after an action uri incoming, the "allowAnswer" tag allows the native interactive keys "Answer" and "Ignore" to be displayed and allow the user to answer the call.

Once the call is answered or ignored, the 2 keys disappear automatically.

6.4 "DROP", "XFER" AND "CONF" KEYS FOR XML APPS IN CONNECTED STATE

When a UI XML object is displayed as with the phone in a connected state, the regular contextual keys ("Drop", "Xfer" and "Conf") are overridden by the XML object, the user cannot access anymore to these telephony features.

To keep a consistent behavior of the phone when the phone is connected, 3 tags have been introduced:

- allowDrop
- allowXfer
- allowConf

When they are enabled the native interactive keys are displayed on top of the XML object.

Once the call is ended, the 3 keys disappear automatically.

6.5 APPLICATIONS

Action URIs are very powerful as they allow an external application to take control of the display when an event occurs.

Here are some examples of potential applications.

Self-configuration

Using the startup URI, it is possible to develop self-provisioning on the phone. If a new phone boots and gets its configuration server IP address (through DHCP option 66 for example), it can download the `astra.cfg` file with a startup URI set to an XML application, as it is a new phone the `<MAC>.cfg` config files does not exist. At the end of the boot, the phone will go to this XML application which can identify the phone and then generate the `<MAC>.cfg` file "on the fly" and ask the phone to reboot using the `PhoneExecute` object.

Screen pop

Using the action uri incoming, it is possible to display extra information on the phone for an incoming call. For instance, the XML application that is called when there is an incoming call can do a database lookup (Microsoft Exchange or any database) and display information on the caller. Basically it is like having a screen pop application directly on the phone.

Call Center

As for the Screen pop, the incoming URI can be used in a call center environment to display CRM or queue information on the caller. The on-hook URI can also be used to collect the wrap-up code at the end of a call.

And many more...

7 XML CONFIGURATION

After creating an XML application to use on the IP phone, the application can be accessed as a Service or a Key.

7.1 CONFIGURING A CUSTOM SERVICE FROM THE WEB UI

The custom service is available only for 9480i/9480iCT/55i/57i/57iCT/6735i/6737i.

To load a new custom XML application to the IP phone, enter an HTTP address for the application at the “**Softkeys and XML**” screen in the Mitel IP Phone Web interface.

Select Operation=>Softkeys and XML.

Enter the HTTP address in the “**XML Application URL**” field.

If desired, give the XML application a custom title in the “**XML Application Title**” field.

The following illustration shows how to configure the access to an XML application:

- called “XML applications”
- which URI is located at “<http://65.36.55.137/xml/menu/mymenu.php>”.

After clicking **Save Settings** in the Softkeys Configuration screen, the XML application is dynamically applied to the IP phone you are configuring. The application URI can be accessed by pressing the “Services” button on your IP phone and selecting option 4.

The screenshot shows the "Softkeys Configuration" page in the Mitel IP Phone Web interface. On the left, a sidebar lists various configuration options under "Operation" (Status, User Password, Phone Lock, Softkeys and XML, Directory, Reset) and "Advanced Settings" (Network, Global SIP, Lines 1-9, Action URI, Configuration Server, Firmware Update, TLS Support, 802.1x Support, Troubleshooting). Two input fields on the left are highlighted with arrows pointing to specific configuration sections: "XML Application URL" points to the "XML Application URI:" field containing "http://65.205.71.13/xml/menu/mymenu.php?menu_t"; "XML Application Title" points to the "XML Application Title:" field containing "XML Applications". The main table lists 20 softkey entries, each with a "Type" dropdown set to "XML". The "Label" column contains labels like "Directory", "Speed Dial", "Registry", etc. The "Value" column contains their corresponding URLs. The "Line" column shows line numbers 1 through 19. The "Idle", "Connected", "Incoming", "Outgoing", and "Busy" columns contain checkboxes. At the bottom right of the table is a "Save Settings" button.

7.2 CONFIGURING A SOFT OR PROGRAMMABLE KEY USING THE PHONE WEB UI

In addition to linking an XML application to a custom service, an application can be also be linked to a softkey and/or a programmable key depending on the phone and on the phone configuration (expansion modules).

Select “Operation” => “Softkeys and XML” (9480i, 9480iCT, 55i, 57i, 57iCT, 6735i, 6737i)

Or

Select “Operation” => “Programmable Keys” (9143i, 6753i, 55i, 6735i)

Or

Select “Operation” => “Expansion Module X” (6753i, 55i, 57i, 57i CT, 6735i, 6737i with expansion module(s))

Choose type “XML” for the desired key.

Enter the URI in the value field.

Click **Save Settings**.

Softkeys Configuration

Bottom Keys **Top Keys**

Key	Type	Label	Value	Line	Idle	Connected	Incoming	Outgoing	Busy
1	XML	Directory	http://192.168.0.112/x	1	<input checked="" type="checkbox"/>				
2	XML	Speed Dial	http://192.168.0.112/x	1	<input checked="" type="checkbox"/>				
3	XML	Registry	http://65.205.71.13/xn	1	<input checked="" type="checkbox"/>				
4	XML	XML.Dev	http://65.205.71.13/xn	1	<input checked="" type="checkbox"/>				
5	XML	Trixbox	http://192.168.0.112/x	1	<input checked="" type="checkbox"/>				
6	XML	Sample	http://192.168.0.112/x	1	<input checked="" type="checkbox"/>				
7	XML	SampleGO	http://192.168.0.112/x	1	<input checked="" type="checkbox"/>				
8	XML	Yahzee	http://192.168.0.112/x	1	<input checked="" type="checkbox"/>				
9	Directed Call Pickup	Pickup	--	4	<input checked="" type="checkbox"/>				
10	BLF	202	202	4	<input checked="" type="checkbox"/>				
11	XML	Bug Icon	http://192.168.0.112/x	1	<input checked="" type="checkbox"/>				
12	XML	GO	http://192.168.0.112/x	1	<input checked="" type="checkbox"/>				
13	XML	D1	http://192.168.0.112/F	1	<input checked="" type="checkbox"/>				
14	XML	D2	http://192.168.0.112/F	1	<input checked="" type="checkbox"/>				
15	XML	SP	http://192.168.0.112/F	1	<input checked="" type="checkbox"/>				
16	None			1	<input checked="" type="checkbox"/>				
17	None			1	<input checked="" type="checkbox"/>				
18	None			1	<input checked="" type="checkbox"/>				
19	None			1	<input checked="" type="checkbox"/>				
20	None			1	<input checked="" type="checkbox"/>				

Softkeys →

Line 9	Action URI	Configuration Server	Firmware Update	TLS Support	802.1x Support	Troubleshooting
--------	------------	----------------------	-----------------	-------------	----------------	-----------------

→ **Note:** Reboot is not required.

7.3 CONFIGURING THE XML PUSH SERVER LIST USING THE PHONE WEB UI

The IP phone will only accept HTTP POSTs from the IP addresses set in the **XML Push Server List**.

Select Advanced Settings=>Configuration Server.

Enter a comma-separated list of IP addresses or domain names in the **XML Push Server List** field.

Click **Save Settings** and reboot the phone.

Configuration Server Settings

Settings

Download Protocol	TFTP
TFTP Server	192.168.0.112
TFTP Path	
Alternate TFTP	0.0.0
Alternate TFTP Path	
Use Alternate TFTP	<input checked="" type="checkbox"/> Enabled
FTP Server	
FTP Path	
FTP Username	
FTP Password	
HTTP Server	
HTTP Path	
HTTP Port	80
HTTPS Server	
HTTPS Path	
HTTPS Port	443

Auto-Resync

Mode	None
Time (24-hour)	00:00

XML Push Server List(Approved IP Addresses)

192.168.0.112

Save Settings

7.4 CONFIGURING THE ACTION URIS USING THE PHONE WEB UI

You can configure the URI to be called for each type of event supported by the phone from the Web UI...

Select Advanced Settings=>Action URI.

Enter the URI for each type of event.

Click **Save Settings**.

Action URI Configuration

Event	URI	
StartUp	http://192.168.0.133:80/astra/asterisk/sync.php?ac	
Successful Registration	http://192.168.0.133:80/astra/asterisk/sync.php?ac	
Registration Event	http://192.168.0.133:80/astra/asterisk/incoming.php	
Incoming Call	http://192.168.0.133:80/astra/asterisk/outgoing.php	
Outgoing Call		
Offhook		
Onhook	http://192.168.0.133:80/astra/asterisk/onhook.php?	
Connected		
Disconnected		
XML SIP Notify	http://192.168.0.133:80/astra/asterisk/sync.php?ac	
Event	URI	Settings
Poll	http://192.168.0.133:80/astra/asterisk/sync.php?ac	Interval 1800

Save Settings

Action URIs

7.5 CONFIGURING THE XML BEEP SUPPORT USING THE PHONE WEB UI

You can configure the **XML Beep Support** (enabled or disabled) from the Web UI. It impacts the behavior of the `AastraIPPhoneStatus` object regarding the phone notification.

Select Basic Settings=>Preferences.

Enable or disable the parameter.

Click **Save Settings**.

Preferences

General

Status Scroll Delay (seconds):

Auto-Answer:

Microphone Mute:

Play Warning Tone:

Allow Barge In:

Outgoing Intercom Settings

Type: Off

Prefix Code:

Incoming Intercom Settings

Auto-Answer:

Microphone Mute:

Play Warning Tone:

Allow Barge In:

XML Beep Support

7.6 CONFIGURING THE STATUS SCROLL DELAY USING THE PHONE WEB UI

You can configure the **Status Scroll Delay** (delay in seconds, default 5) from the Web UI. It impacts the behavior of the `AastraIPPhoneStatus` object defining the delay between each message.

Select Basic Settings=>Preferences.

Enter the value in seconds.

Click **Save Settings**.

Preferences

General

Status Scroll Delay (seconds):

Auto-Answer:

Microphone Mute:

Play Warning Tone:

Allow Barge In:

Outgoing Intercom Settings

Type: Off

Prefix Code:

Incoming Intercom Settings

Auto-Answer:

Microphone Mute:

Play Warning Tone:

Allow Barge In:

Status Scroll Delay

7.7 CONFIGURING THE XML SIP NOTIFY USING THE PHONE WEB UI

You can configure the **XML SIP Notify** from the Web UI. It will enable or disable SIP Notify aastraxml to be processed by the phone.

Select Advanced Settings=>Global SIP.

Enable or disable the parameter.

Click **Save Settings**.

Status	Missed Call Summary Subscription Period	86400
Operation	AS-Feature-Event Subscription	<input type="checkbox"/> Enabled
	AS-Feature-Event Subscription Period	3600
	Send MAC Address in REGISTER Message	<input type="checkbox"/> Enabled
	Send Line Number in REGISTER Message	<input type="checkbox"/> Enabled
Basic Settings	Session Timer	0
Preferences	T1 Timer	0
Account Configuration	T2 Timer	0
Advanced Settings	Transaction Timer	4000
Network	Transport Protocol	UDP
Global SIP	Local SIP UDP/TCP Port	5060
Line 1	Local SIP TLS Port	5061
Line 2	Registration Failed Retry Timer	1800
Line 3	Registration Timeout Retry Timer	120
Line 4	Registration Renewal Timer	15
Line 5	BLF Subscription Period	3600
Line 6	ACD Subscription Period	3600
Line 7	Blacklist Duration	300
Line 8	Whitelist Proxy	<input checked="" type="checkbox"/> Enabled
Line 9	XML SIP Notify	<input checked="" type="checkbox"/> Enabled
Action URI	RTP Settings	
Configuration Server	RTP Port	3000
Firmware Update	Basic Codecs(G.711 u-Law, G.711 a-Law, G.729)	<input type="checkbox"/> Enabled
TLS Support	Force RFC2833 Out-of-Band DTMF	<input checked="" type="checkbox"/> Enabled
802.1x Support	Customized Codec Preference List	payload=0;ptime=20;sil
Troubleshooting	DTMF Method	RTP
	RTP Encryption	SRTP Disabled
	Silence Suppression	<input checked="" type="checkbox"/> Enabled
	Autodial Settings	
	Autodial Number	
	Autodial Timeout	0

7.8 XML CONFIGURATION USING THE CONFIGURATION FILES

The *aastra.cfg* and <*mac*>.cfg Configuration File contains all the configuration parameters for the phone. Please refer to the phone administration guide for more details.

7.8.1 GENERAL XML PARAMETERS

You can configure the XML applications in the *aastra.cfg* or <*mac*>.cfg file using the following parameters:

```

xml application URI1
xml application title1
xml application post list
xml beep notification
xml status scroll delay
xml get timeout
xml lock override
services script2
callers list script
directory script
redial script
xfer script
conf script
icom script
voicemail script
options script
auto offhook

```

Parameter – xml application URI	Configuration Files aastr้า.cfg, <mac>.cfg
Description	This is the XML application you are loading into the IP phone configuration.
Format	HTTP server path or fully qualified Domain Name
Default Value	Not Applicable
Range	Not Applicable
Example	xml application URL: http://172.16.96.63/aastr้า/internet.php
Parameter – xml application title	Configuration Files aastr้า.cfg, <mac>.cfg
Description	This parameter allows you to rename the XML application in the IP phone UI (Services->4. Custom Feature). By default, when you load an XML application to the IP phone, the XML application title is called "Custom Feature". The "xml application title" parameter allows you to change that title. For example, if you are loading a traffic report XML application, you could change this parameter title to "Traffic Reports", and that title will display in the IP phone UI as Services->4. Traffic Reports.
Format	Alphanumeric characters
Default Value	Not Applicable

¹ Not supported on Mitel 53i and Mitel 9143i

² Not supported on Mitel 51i, Mitel 53i and Mitel 9143i

Range	Not Applicable
Example	xml application title: Traffic Reports

Parameter – xml application post list	Configuration Files aastr้า.cfg, <mac>.cfg
Description	The HTTP server that is pushing XML applications to the IP phone.
Format	IP address in dotted decimal format and/or Domain name address
Default Value	Not Applicable
Range	Not Applicable
Example	xml application post list: 10.50.10.53, dhcp10-53.ana.aastr้า.com

Parameter – xml beep notification	Configuration Files aastr้า.cfg, <mac>.cfg
Description	Enables or disables a BEEP notification on the phone when an Aastr้าIPPhoneStatus object containing a “beep” attribute arrives to the phone.
Format	Boolean
Default Value	Value 1 (ON)
Range	0 (OFF) No beep is audible even if the beep attribute is present in the XML object. 1 (ON) The phone beeps when an XML object with the “beep” attribute arrives to the phone.
Example	xml beep notification: 0

Parameter – xml status scroll delay	Configuration Files aastr้า.cfg, <mac>.cfg
Description	Specifies the length of time, in seconds, that each XML status message displays on the phone.
Format	Integer
Default Value	5

Range	1 to 25
Example	xml status scroll delay: 3

Parameter – xml get timeout	Configuration Files aastr้า.cfg, <mac>.cfg
Description	Specifies the length of time, in seconds, that the phone will wait for a HTTP GET answer called by an XML.
Format	Integer
Default Value	0 (no timeout)
Range	0 to 4294967295
Example	xml get timeout: 10

Parameter – xml lock override	Configuration Files aastr้า.cfg, <mac>.cfg
Description	<p>Specifies the method to use for overriding a locked phone when XML applications are sent to the phone. There are three settings for this parameter:</p> <p>Phone prevents XML POSTs and XML GETs from being received or sent.</p> <p>Phone allows XML POSTs; however, XML GETs by pressing the XML keys (softkeys/programmable keys/extension module keys) are not allowed.</p> <p>Phone allows XML POSTs to the phone as well as XML GETs to/from the phone by pressing the XML keys (softkeys/programmable keys/extension module keys).</p>
Format	Integer
Default Value	0
Range	0 to 2
Example	xml lock override: 1, xml lock override: 2

Parameter – services script	Configuration Files aastr้า.cfg, <mac>.cfg
Description	Specifies the XML URI to call when a “Services” key (prgkey or softkey) is pressed. The URI overrides native behavior of the “Services” key.

Format	HTTP server path or fully qualified Domain Name
Default Value	Not Applicable
Range	Not Applicable
Example	services script: http://172.16.96.63/services.php

Parameter – callers list script	Configuration Files aastr.cfg, <mac>.cfg
Description	Specifies the XML URI to call when a “Callers List” key (prgkey or softkey) is pressed. The URI overrides native behavior of the “Callers List” key.
Format	HTTP server path or fully qualified Domain Name
Default Value	Not Applicable
Range	Not Applicable
Example	callers list script: http://172.16.96.63/callers.php

Parameter – directory script	Configuration Files aastr.cfg, <mac>.cfg
Description	Specifies the XML URI to call when a “Directory” key (prgkey or softkey) is pressed. The URI overrides native behavior of the “Directory” key.
Format	HTTP server path or fully qualified Domain Name
Default Value	Not Applicable
Range	Not Applicable
Example	directory script: http://172.16.96.63/directory.php

Parameter – redial script	Configuration Files aastr.cfg, <mac>.cfg
Description	Specifies the XML URI to call when a “Redial” key (prgkey or softkey) is pressed. The URI overrides native behavior of the “Redial” key.
Format	HTTP server path or fully qualified Domain Name
Default Value	Not Applicable

Range	Not Applicable
Example	redial script: http://172.16.96.63/redial.php

Parameter – xfer script	Configuration Files aastr.cfg, <mac>.cfg
Description	Specifies the XML URI to call when a “Xfer” key (prgkey or softkey) is pressed. The URI overrides native behavior of the “Xfer” key.
Format	HTTP server path or fully qualified Domain Name
Default Value	Not Applicable
Range	Not Applicable
Example	xfer script: http://172.16.96.63/xfer.php



Note: The Xfer key is redirected only in the “connected” and “dialing” states.

Parameter – conf script	Configuration Files aastr.cfg, <mac>.cfg
Description	Specifies the XML URI to call when a “Conference” key is pressed. The URI overrides native behavior of the “Conference” key.
Format	HTTP server path or fully qualified Domain Name
Default Value	Not Applicable
Range	Not Applicable
Example	conf script: http://172.16.96.63/conf.php



Note: The Conference key is redirected only in the “connected” state.

Parameter – icom script	Configuration Files aastr.cfg, <mac>.cfg
Description	Specifies the XML URI to call when a “Icom” key (prgkey or softkey) is pressed. The URI overrides native behavior of the “Icom” key.

Format	HTTP server path or fully qualified Domain Name
Default Value	Not Applicable
Range	Not Applicable
Example	icom script: http://172.16.96.63/icom.php

Parameter – voicemail script	Configuration Files aastr้า.cfg, <mac>.cfg
Description	Specifies the XML URI to call when a “Voicemail” key (prgkey or softkey) is pressed. The URI overrides native behavior of the “Voicemail” key.
Format	HTTP server path or fully qualified Domain Name
Default Value	Not Applicable
Range	Not Applicable
Example	voicemail script: http://172.16.96.63/vm.php

Parameter – options script	Configuration Files aastr้า.cfg, <mac>.cfg
Description	<p>Specifies the XML URI to call when the “Options” key is pressed. The URI overrides native behavior of the “Options” key.</p> <p>On a normal key press of the “Options” key the XML application set in the URI is displayed</p> <p>On a long key press the normal/local options menu is displayed</p>
Format	HTTP server path or fully qualified Domain Name
Default Value	Not Applicable
Range	Not Applicable
Example	options script: http://172.16.96.63/opt.php

Notes:



- If no Options URI script is configured, the local Options Menu on the phone displays as normal.
- If you configure password access to the Options Menu, this password is required when accessing the local Option Menu, but is not required for the Options Key redirection feature.
- Pressing the Options Menu for redirection from the server does not interfere with normal operations of the phone (for example, pressing the options menu when on a call does not affect

the call).
<ul style="list-style-type: none"> • If the phone is locked, you must unlock the phone before accessing the Options Menu redirect feature. After pressing the Options Key, the phone displays a screen that allows you to unlock the phone before continuing.

Parameter – auto offhook	Configuration Files aastr.cfg, <mac>.cfg
Description	Specifies whether or not the phone is prevented from entering the off-hook/dialing state, if the handset is off-hook for more than 2 seconds, and the call ends.
Format	Boolean
Default Value	0 (disabled)
Range	0 (disabled) 1 (enabled)
Example	auto offhook: 1

7.8.2 ACTION URI PARAMETERS

These URIs will be configurable via the configuration files using the following parameters.

- **action uri startup:** <URI to GET on startup>
- **action uri registered:** <URI to GET on successful registration>
- **action uri registration event:** <URI to GET on any registration event>
- **action uri incoming:** <URI to GET on an incoming call>
- **action uri outgoing:** <URI to GET on outgoing call>
- **action uri offhook:** <URI to GET on an off-hook event>
- **action uri onhook:** <URI to get on an on-hook event>
- **action uri poll:** <URI to get when configured timer expires>
- **action uri poll interval:** <polling interval in seconds for action uri poll>
- **action uri xml sip notify:** <URI to get when a aastr-xml SIP notify without content is received by the phone>
- **sip xml notify event:** <Enables or disables the phone to accept an aastr-xml SIP Notify event>
- **action uri connected:** <URI to get on a connect event>
- **action uri disconnected:** <URI to get on a disconnect event>

Parameter – action uri startup	Mitel Web UI: Advanced Settings->Action URI Configuration Files aastr.cfg, <mac>.cfg
Description	URI to be called at the end of the boot sequence.

Format	HTTP(s) server path or fully qualified Domain Name
Default Value	Not applicable
Range	Not applicable
Example	action uri startup: http://myserver.com/myappli.xml

Parameter – action uri registered	Mitel Web UI: Advanced Settings->Action URI Configuration Files aastra.cfg, <mac>.cfg
Description	URI to be called the first time the phone successfully registers.
Format	HTTP(s) server path or fully qualified Domain Name
Default Value	Not applicable
Range	Not applicable
Example	action uri registered: http://myserver.com/myappli.xml

Parameter – action uri registration event	Mitel Web UI: Advanced Settings->Action URI Configuration Files aastra.cfg, <mac>.cfg
Description	URI to be called for every registration event.
Format	HTTP(s) server path or fully qualified Domain Name
Default Value	Not applicable
Range	Not applicable
Example	action uri registration event: http://myserver.com/myappli.xml

Parameter – action uri incoming	Mitel Web UI: Advanced Settings->Action URI Configuration Files aastra.cfg, <mac>.cfg
Description	URI to be called every time the phone receives an incoming call.
Format	HTTP(s) server path or fully qualified Domain Name
Default Value	Not applicable
Range	Not applicable
Example	action uri incoming: http://myserver.com/myappli.xml

Parameter – action uri outgoing	Mitel Web UI: Advanced Settings->Action URI Configuration Files aastraw.cfg, <mac>.cfg
Description	URI to be called every time the phone makes a valid outgoing call.
Format	HTTP(s) server path or fully qualified Domain Name
Default Value	Not applicable
Range	Not applicable
Example	action uri outgoing: http://myserver.com/myappli.xml

Parameter – action uri offhook	Mitel Web UI: Advanced Settings->Action URI Configuration Files aastraw.cfg, <mac>.cfg
Description	URI to be called every time the phone goes offhook.
Format	HTTP(s) server path or fully qualified Domain Name
Default Value	Not applicable
Range	Not applicable
Example	action uri offhook: http://myserver.com/myappli.xml

Parameter – action uri onhook	Mitel Web UI: Advanced Settings->Action URI Configuration Files aastraw.cfg, <mac>.cfg
Description	URI to be called every time the phone goes back on hook after an active call.
Format	HTTP(s) server path or fully qualified Domain Name
Default Value	Not applicable
Range	Not applicable
Example	action uri onhook: http://myserver.com/myappli.xml

Parameter – action uri poll	Mitel Web UI: Advanced Settings->Action URI Configuration Files aastraw.cfg, <mac>.cfg
Description	URI to be called every "action uri pool interval" seconds.

Format	HTTP(s) server path or fully qualified Domain Name
Default Value	Not applicable
Range	Not applicable
Example	action uri poll: http://myserver.com/myappli.xml

Parameter – action uri poll interval	Mitel Web UI: Advanced Settings->Action URI Configuration Files aastr.cfg, <mac>.cfg
Description	Specifies the interval, in seconds, between calls from the phone to the "action uri poll".
Format	Integer
Default Value	0 (disabled)
Range	Not applicable
Example	action uri poll interval:60

Parameter – action uri xml sip notify	Mitel Web UI: Advanced Settings->Action URI Configuration Files aastr.cfg, <mac>.cfg
Description	URI to be called when an empty XML SIP NOTIFY is received by the phone (sip xml notify event must be enabled).
Format	HTTP(s) server path or fully qualified Domain Name
Default Value	Not applicable
Range	Not applicable
Example	action uri xml sip notify: http://myserver.com/myappli.xml

Parameter – sip xml notify event	Mitel Web UI: Advanced Settings->Global SIP-> Advanced SIP Settings Configuration Files aastr.cfg, <mac>.cfg
Description	Enables or disables the phone to accept an aastr-xml SIP NOTIFY message.
Format	Boolean
Default Value	0

Range	0 - disabled 1 – enabled
Example	sip xml notify event:1

Parameter – action uri connected	Mitel Web UI: Advanced Settings->Action URI Configuration Files aastraweb.cfg, <mac>.cfg
Description	URI to be called every time the phone goes to the connected state.
Format	HTTP(s) server path or fully qualified Domain Name
Default Value	Not applicable
Range	Not applicable
Example	action uri connected: http://myserver.com/co.php

Parameter – action uri disconnected	Mitel Web UI: Advanced Settings->Action URI Configuration Files aastraweb.cfg, <mac>.cfg
Description	URI to be called every time the phone goes back to the idle state.
Format	HTTP(s) server path or fully qualified Domain Name
Default Value	Not applicable
Range	Not applicable
Example	action uri disconnected: http://myserver.com/di.php

7.8.3 PROGRAMMABLE AND SOFT KEYS

You can configure keys calling an XML application using the following parameters.

```
softkeyX/prgkeyX/topsoftkeyX/expmodT keyX type: xml
softkeyX/prgkeyX/topsoftkeyX/expmodT keyX value: http://someapp.xml
```

As described in chapter 5.2, system variables can be used in the URI to be called by pressing a key.

7.8.4 EXAMPLES

Example (9143i/6753i/6730i/6731i)

```
# XML configuration
xml application URI: http://172.16.96.63/aatra/internet.php
xml application post list: 10.10.50.53, xmlserver.aatra.com
xml beep notification: 1
xml status scroll delay: 5

# Key 1
prgkey1 type: xml
prgkey1 value: http://172.16.96.63/aatra/internet.php

# Key 2
prgkey2 type: xml
prgkey2 value: http://myserver.com/login.php?user=$$SIPUSERNAME$$
```

Example (6735i/6737i/6739i/9480i/9480iCT/55i/57i/57i CT)

```
# XML configuration
xml beep notification: 1
xml status scroll delay: 5

# Softkey 1
softkey1 type: xml
softkey1 label: My XML
softkey1 value: http://172.16.96.63/aatra/internet.php

# Softkey 2
softkey2 type: xml
softkey2 label: Login
softkey2 value: http://myserver.com/login.php?user=$$SIPUSERNAME$$
```

8 TROUBLESHOOTING XML APPLICATIONS

8.1 INTRODUCTION

The following figure shows the HTTP call flows when the phone is performing an XML operation.

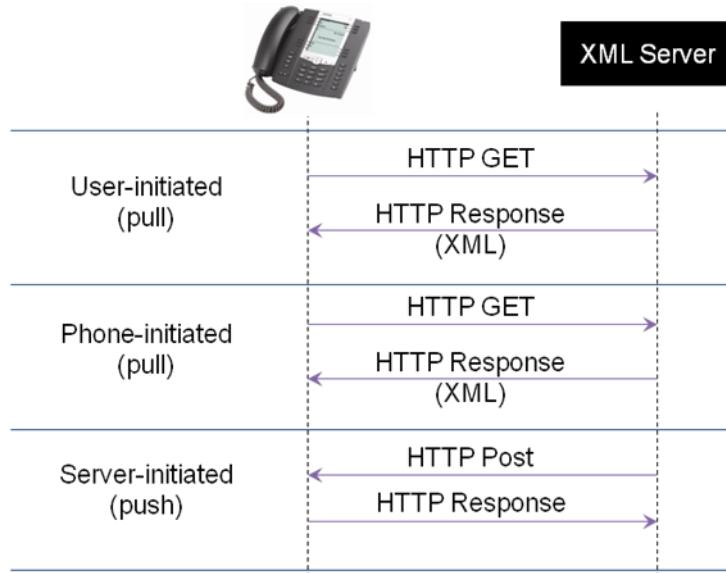


Figure 102: HTTP flow for XML applications

When the phone performs an HTTP GET there are many potential sources of error such as:

Server is not reachable	Answer
Network is down	Cannot display
Server is down	Cannot display
HTTP server application is down	Cannot display
URI can not be resolved (DNS issue)	Cannot display
Server is reachable	Answer
Wrong file name on the server	File not found
Parsing error of the XML answer	Cannot display
Timeout reached before getting an answer	Connect Timeout
URI can not be parsed (wrong format)	Invalid URI

Most of the time, an error will translate into a “Cannot display” which is not very helpful to find the origin of the problem as well as very frustrating for the XML developer.

The most common error is a XML parsing error and often the most difficult one to fix.



Note: Using the php classes provided in the toolkit is a good way to limit the number of parsing errors as the object are built following the XSD scheme.

When the server performs a PUSH to the phone, the common errors are:

Nothing happens, most of the time the problem comes from a wrong configuration of the XML push list.

“Cannot display”, if the XML object pushed to the phone creates a parsing error (object not properly formatted).

8.2 TROUBLESHOOTING TOOLS

The following tools will help you troubleshoot problems with the XML services.

Standard web browser (Microsoft Internet Explorer 6.0 or a later version)


- Verify the connectivity
- Verify the validity of the URI called by the phone
- Verify if the XML answer has a correct syntax
- Network packet analyzer such as Wireshark
- Verify what is exchanged between the phone and the server
- HTTP Server log
- Verify if the HTTP GET reached the server
- Verify the parameters of the HTTP GET
- XML validator tools
- Verify the XML syntax and the compliance with the XSD model
- Phone log (syslog)
- Verify how the phone processes a XML request


This last tool is the most powerful as it allows you to read phone internal traces and understand why something went wrong. It is the best way to debug a parsing error.

The phone can be configured to send internal traces to a Syslog server (such as Kiwi Syslog Daemon) either from the WebUI or from the configuration files.

8.3 CONFIGURING THE SYSLOG SERVER USING THE WEBUI

You can configure the **Syslog server and activate the traces** from the Web UI.

- Select Advanced Settings=>Troubleshooting.
- Set Log IP (IP address of the Syslog server) and Log port (usually 514)
- Set XML to 65535
- Click .

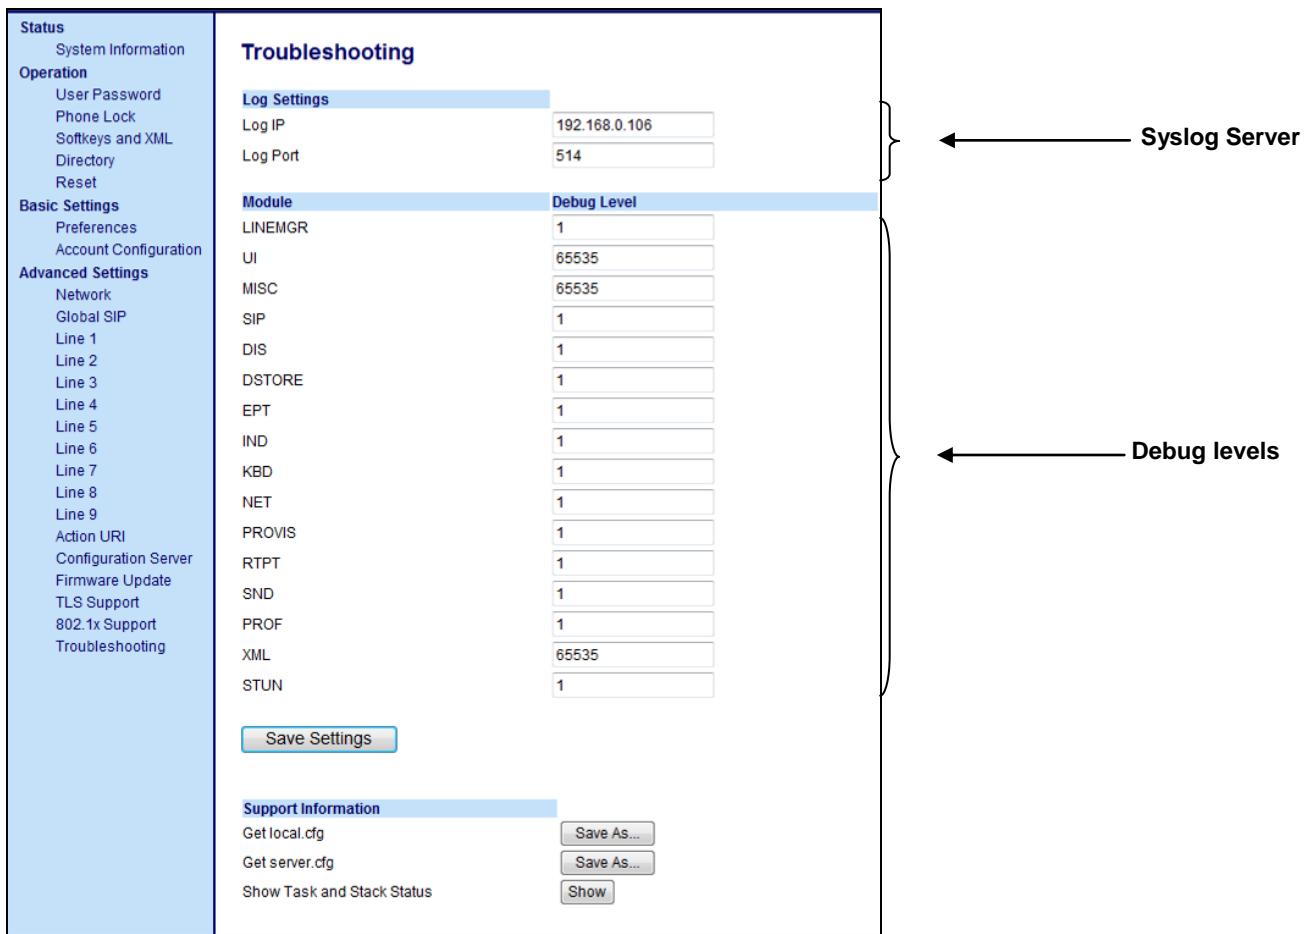

8.4 CONFIGURING THE SYSLOG SERVER USING THE CONFIGURATION FILES

The traces can also be activated from the configuration files (aastra.cfg and/or <MAC>.cfg), using the following parameters:

Syslog server

- log server ip IP address of the Syslog server
- log server port Port of the Syslog server

Traces level

- log module xml debug level for xml module

Example

```
# Syslog Server
log server ip: 192.168.0.106
log server port: 514

# Debug list
log module xml: 65535
```

8.5 PARSING ERROR DEBUG EXAMPLE

In this example, the phone is making an XML GET and receives the following XML object as an answer. The answer has an obvious parsing error, the phone displays 'Cannot display'.

```

<?xml version="1.0" encoding="ISO-8859-1"?>
<AastraIPPhoneTextMenu>
<Title>Graphic Apps Demo</Title>
<MenuItem>
<Prompt>Clock Digital GMT+1</Prompt>
<URI>http://192.168.0.112/xml/lucaGD/demo.php?type=dclock</URI>
</MenuItem>
<MenuItem>
<Prompt>Clock Analog GMT+1</Prompt>
<URI>http://192.168.0.112/xml/lucaGD/demo.php?type=aclock</URI>
</MenuItem>
<MenuItem>
<Prompt>Different Fonts</Prompt>
<URI>http://192.168.0.112/xml/lucaGD/demo.php?type=font</URI>
</MenuItem>
</AastraIPPhoneTextMenu>

```

The error is on the last line, it should be </AastraIPPhoneTextMenu>.

The following Syslog traces tell us where the problem is.

```

CreateApp: (UI) INFO: XML=|<?xml version="1.0" encoding="ISO-8859-1"?><010><AastraIPPhoneTextMenu><010><Title>Graphic Apps Demo</Title><010><MenuItem><010><Prompt>Clock Digital GMT+1</Prompt><010><URI>http://192.168.0.112/xml/lucaGD/demo.php?type=dclock</URI><010></MenuItem><010><MenuItem><010><Prompt>Clock Analog GMT+1</Prompt><010><URI>http://192.168.0.112/xml/lucaGD/demo.php?type=aclock</URI><010></MenuItem><010><MenuItem><010><Prompt>Different Fonts</Prompt><010><URI>http://192.168.0.112/xml/lucaGD/demo.php?type=font</URI><010></MenuItem><010><AastraIPPhoneTextMenu><010>|<010>mac:00-08-5D-1A-3C-54

ParserData: (XML) FUNC: ParserData ctor<010>mac:00-08-5D-1A-3C-54

TextMenuData: (XML) FUNC: TextMenuData ctor<010>mac:00-08-5D-1A-3C-54

startTagHandler: (XML) ERROR: Invalid tag: <AastraIPPhoneTextMenu> in the Root state<010>mac:00-08-5D-1A-3C-54

TextMenuData: (XML) FUNC: TextMenuData dtor<010>mac:00-08-5D-1A-3C-54

ParserData: (XML) FUNC: ParserData dtor<010>mac:00-08-5D-1A-3C-54

CreateApp: (UI) ERROR: !!!!!!!!!!!!!!! XML parsing error: no element found, Line 16, Column 23 !!!!!!!!!!!!!!!<010>mac:00-08-5D-1A-3C-54

ParserData: (XML) FUNC: ParserData ctor<010>mac:00-08-5D-1A-3C-54

```

9 WHY XML APPLICATIONS FOR AN IP PHONE?

XML applications can be split in 3 categories:

- Telephony applications, integration with the call processing, Voice Mail server, Conference server, Call Center application...
- Media and information
- Vertical applications

9.1 TELEPHONY APPLICATIONS

This chapter details potential XML telephony applications which could be developed to enhance integration of an IP phone with the other telecom applications.

9.1.1 DIRECTORY

The first obvious applications that can be developed are the directory application, it includes:

- PBX directory
- Corporate directory (Global list from a Microsoft Exchange server)
- Personal contacts (My contacts in Outlook)
- Any LDAP directory (public or private)

9.1.2 CALL PROCESSING

XML applications can also be used to develop interactions between the call processing and the phone:

- DND
- Call Forward
- Parked calls
- Call pickup
- PBX configuration

9.1.3 VOICE-MAIL

- Voice mail messages management (play, skip, delete, ...)
- Display message envelopes
- Presence management

9.1.4 CONFERENCE BRIDGE

- Conference booking
- Conference reminder
- Audio console

9.1.5 CONTACT CENTER

- Agent Login/Logout
- Access to call center reports
- Account codes
- Wrap codes

9.2 MEDIA AND INFORMATION

These are the applications getting information from the Web.

- Weather Alerts
- Stock Alerts
- Stock Prices
- Worldwide Time/Temperature
- Server Alarms and Notifications
- Server Status
- Account Balances
- Current Gas Prices
- Local Movie Times
- Upcoming Concerts-By Category
- Order Flowers-by Category
- Send Order to Starbucks
- Send SMS Messages
- Track FedEx Package (or Airborne, UPS, etc.)
- Calling Card Minutes Remaining
- Reserve Meeting Rooms
- Contact center Metrics (Calls Waiting, Longest Hold, Performance against Service Level, etc.)
- Pro Sports Scores, Vegas Betting Lines
- Multitude of Banking apps: Balances, Transfers, etc.
- Language Translation
- Daily Horoscope
- Broadcast Joke Of The Day/Inspirational Quote of the Day

9.3 VERTICAL APPLICATIONS

This chapter details potential vertical applications that can be developed as an XML application for the Mitel IP phones. The list is far from being exhaustive.

9.3.1 HUMAN RESOURCES

- Available Vacation Days
- Available Personal Days
- 401K balance
- Clock-In/Clock-Out

9.3.2 TRAVEL/HOTEL

- Current Balance
- In-Room Dining Ordering
- Delivery Dining Options
- Extend Stay
- Schedule Airport Shuttle
- Request Housekeeping/Engineering

- Leave Feedback
- Wake-Up Call
- Book Corporate Travel
- Do Not Disturb

9.3.3 HEALTH CARE

- Test Results
- Manage Appointment
- Appointment Reminders
- Take-Your-Medicine Reminders
- Order Hospital Meals
- Check Pharmacy Inventory
- Schedule Blood Donation

9.3.4 EDUCATION

- Attendance
- Request Substitute Teacher (used by primary teacher)
- Review Open Requests for Substitute Teacher (used by potential subs)
- Schedule Classes
- Request Dorm Room Change
- School Closing Notification/Status
- Parent Contact Info

9.3.5 LAW ENFORCEMENT

- Amber Alerts
- Traffic Ticket Plead By Phone
- Fugitive Alerts

10 PHONE SELF-CONFIGURATION USING XML

10.1 INTRODUCTION

The deployment of a SIP phone is not a simple task; you have to face 2 challenges:

- Provide the address of the configuration server to the phone
- Link the MAC address of the phone with a SIP extension

The first challenge is usually solved by using DHCP option 66 (bootp) to provision the phone with the IP address/name of the configuration server (TFTP, FTP, HTTP or HTTPS).

The second challenge is more difficult as you have to know the MAC address of the phone in advance in order to prepare the specific configuration file the phone will use. Usually, each phone is identified (scan of the MAC address) and then linked to an extension.

It is possible to have a complete self-configuration of the phone using an XML application called by the action uri startup at the end of the boot sequence.

10.2 MESSAGE FLOW

It is possible for a third-party to develop an automatic configuration process. The following is a description of how this can be done using existing phone features.

The astra.cfg file sets the startup action uri configuration parameter to point to the configuration script and configuration download information.

Phone downloads the astra.cfg file, ignores missing <MAC>.cfg file and continues boot process.

Phone executes startup uri, running the configuration script. The MAC address of the phone and the phone model are in the HTTP headers of the request.

The script uses XML to gather required configuration information and creates <mac>.cfg file. The <mac>.cfg file must reset the startup action uri to avoid the configuration script being called on subsequent boots.

The script reboots the phone via XML reboot command or via SIP check-sync message.

Phone reboots, directly downloads both astra.cfg and newly created <MAC>.cfg file

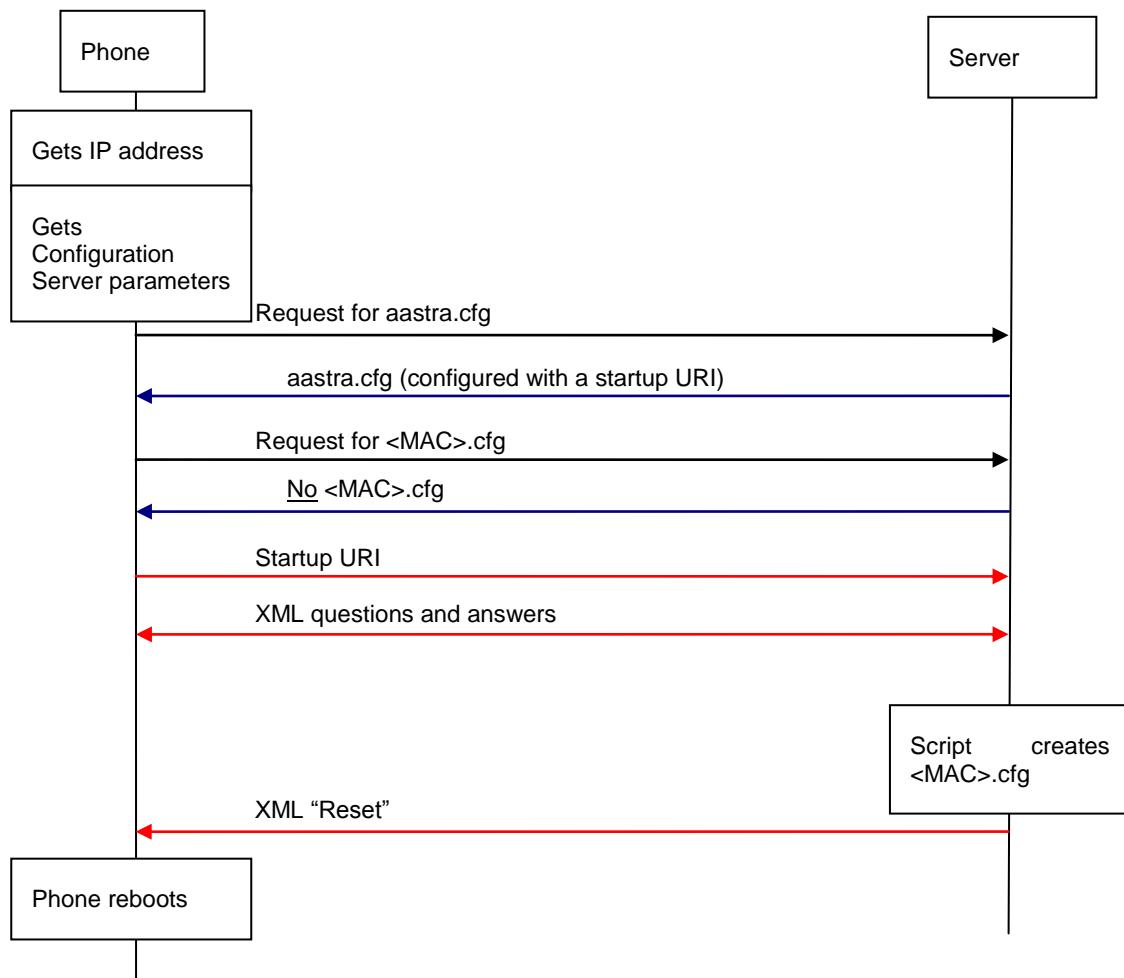


Figure 103: Auto-configuration message flow

10.3 AUTO-CONFIGURATION POLICY

The auto-configuration policy which includes the flow of questions asked to the user and the script to generate the <MAC>.cfg file is totally open with this mechanism.

Multiple options are available.

Extension is already provisioned in the IP-PBX database.

One way to implement this feature might be to have all the extensions already provisioned on the switch side and the XML flow will be used to identify the user (extension number and voicemail password for instance). The script must then control if the extension is not already assigned and create the <MAC>.cfg based on the extension(s) configuration.

Another way would be to display the list of available extensions and let the user select his extension; of course password protection is needed to avoid any hacking of the platform.

Extension is not provisioned in the IP-PBX database

A second option is to have the script to provision the extension in the database. To do so, the script can ask for user general parameters (name...) and automatically creates an extension in the switch database and then creates the <MAC>.cfg, the extension number can be either automatically assigned or the user can select it in a list of available extensions.

10.4 ARCHITECTURE

The following diagram represents the architecture of what needs to be developed to implement the Mitel self-configuration mechanism.

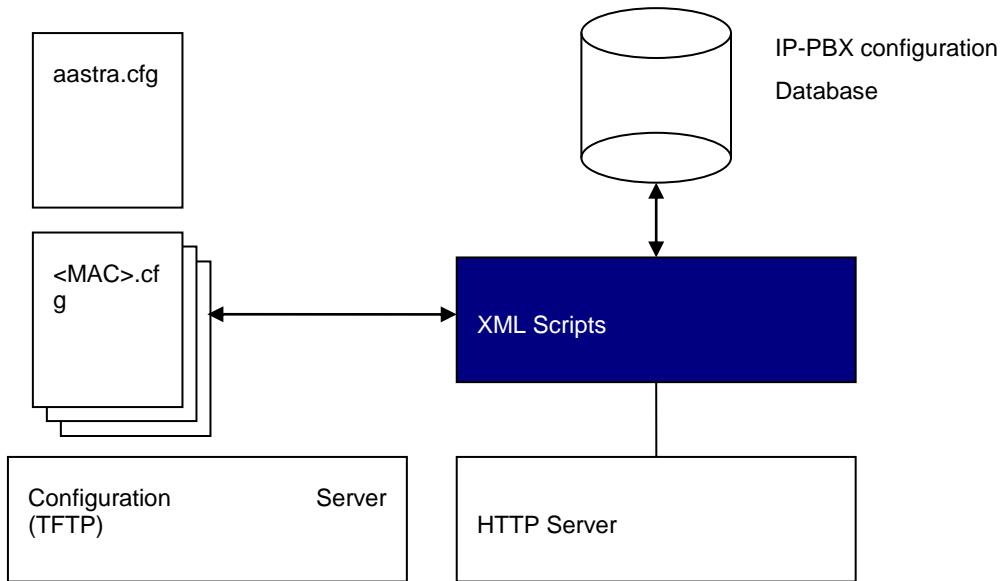


Figure 104: Self-configuration implementation architecture

The development effort to implement the self-configuration is fairly straight forward but the complexity depends on the policy to attribute extensions on the phone system.

11 SAMPLE XML APPLICATIONS

Here is the list of XML applications provided by Mitel, these XML applications are available either through an Internet server hosted by Mitel or as source code (part of the Mitel XML API SDK) to be executed from a local PC running XAMPP for example.

- [Area code \(US\)](#)
- [Biorhythms](#)
- [CNN News](#)
- [Currency Converter](#)
- [ESPN News](#)
- [Fox News](#)
- [Horoscope](#)
- [IP Geolocation](#)
- [Local Weather \(US\)](#)
- [Movies](#)
- [Netflix](#)
- [Stock](#)
- [Today...](#)
- [World Clock](#)
- [Yahtzee](#)
- [All the above](#)

11.1 ACCESS FROM THE INTERNET

Mitel has made available, **for demonstration purpose only**, a list of XML applications on the Internet.

Notes:

 Mitel does not guarantee the availability of these applications. The applications can change at any time without notice.

These applications should not be used commercially; any abusive use of these applications will be detected and the phone will be automatically banned from the applications.

your Mitel SIP phone must have Internet access to use these applications.

The XML applications can be configured individually on a phone key or as a global menu.

11.2 LOCAL SERVER USING XAMPP

XAMPP is a free, cross-platform, easy-to-use web server capable of serving dynamic pages. XAMPP consists mainly of the Apache HTTP Server, MySQL database and interpreters for scripts written in the PHP and Perl programming languages. The program is released under the GNU General Public License.



Notes: your server must have Internet access to use these applications.

XAMPP is an acronym for:

- **X** (any of the four operating systems Windows, Linux, Sun Solaris and Mac OS X)
- **A**pache
- **M**ySQL
- **P**HP
- **P**erl

The XAMPP 1.6.6 Basic Package includes the following main components:

- Apache HTTPD 2.2.8 + OpenSSL 0.9.8g
- MySQL 5.0.51
- PHP 5.2.5 + PHP 4.4.8 rc2 dev + PEAR
- SQLite 2.8.15

- phpMyAdmin 2.11.4
 - Mercury Mail Transport System v4.52
 - FileZilla FTP Server 0.9.25
-



Note: the XML scripts provided by Mitel use only Apache and PHP.

11.2.1 XAMPP INSTALLATION

The nice thing with XAMPP is that it does not need to be installed. Simply extracting the archive to the root folder of your disk is enough. No registry keys are written, no files are copied to the Windows directory. You can even put XAMPP on a memory stick and run it from there. This makes it very portable and easy to use.


XAMPP can be downloaded from <http://www.apachefriends.org/en/xampp.html>, where you can select which Operating System you want to use XAMPP.

Please refer to the XAMPP web site for detailed information on how to install the software.

Notes:



- Make sure you extract XAMPP to the root directory of your disk or memory stick (e.g. C:\), otherwise you may run into troubles later
 - If you have an existing PHP installation on your computer, please uninstall it or remove the Windows environment variable PHPRC (open the Windows Control Panel, go to System, Advanced, Environment Variables and remove the PHPRC variable). Otherwise XAMPP might use the wrong PHP settings.
-

Once XAMPP is installed, just run  which is located in the xampp directory. This configures the installation of XAMPP on your computer.


To uninstall, just remove the xampp directory.


11.2.2 XML SCRIPTS INSTALLATION

Just create a directory named “xml” under “xampp/htdocs” directory and unzip the xml-xampp.zip file provided in the Mitel XML API SDK in this directory.

Also create a “cache” directory under the xampp directory. This directory will be used to cache data on the server.


11.2.3 XAMPP START AND STOP

In the xampp directory run . To start the Apache HTTP server, just click on the “Start” button next to the Apache module.

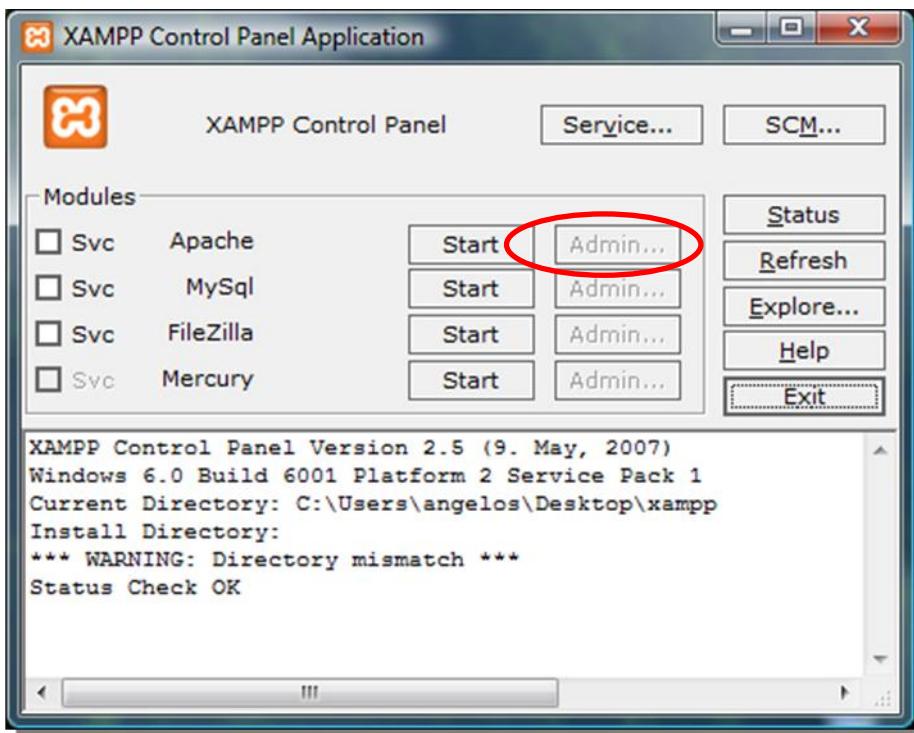

Apache is now running.

- **Note:** In case you have a firewall running (native for Windows XP or Vista), you will be prompted to authorize Apache HTTP Server.

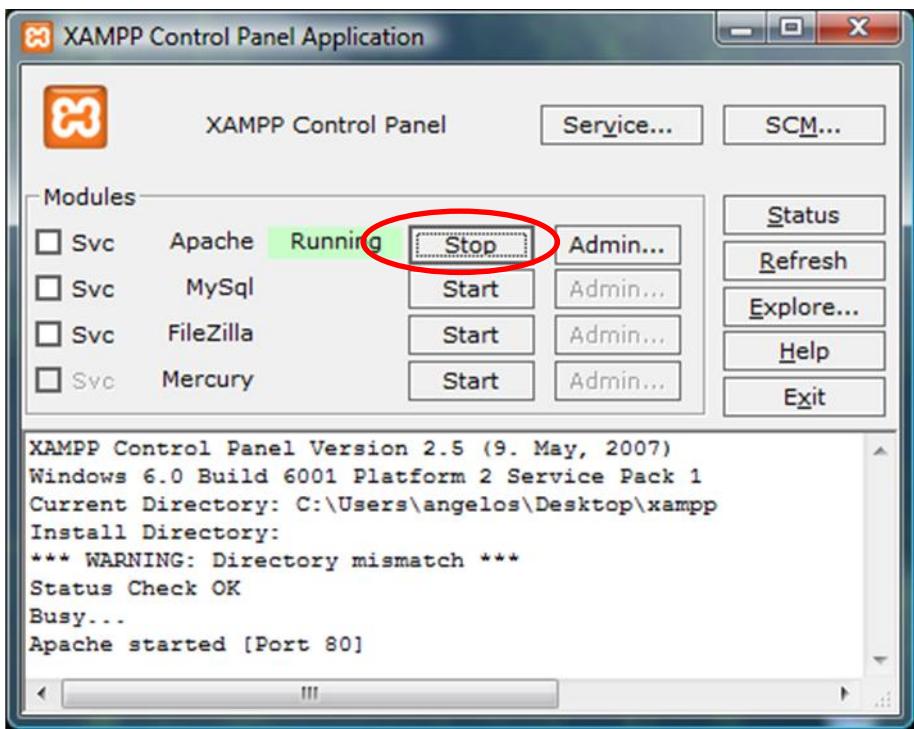

To stop Apache, simply click on the Stop-button. To close the XAMPP Control Panel, click on the Exit button.

11.2.4 TEST YOUR INSTALLATION

To test the HTTP server, direct your Web browser to <http://localhost/xampp/>. You should see the following page:

The screenshot shows the XAMPP for Windows control panel. On the left is a vertical navigation menu with sections: XAMPP (with sub-options like PHP 5.2.5, Welcome, Status, Security, Documentation, Components, phpinfo()), Demos (with sub-options like CD Collection, Biorhythm, Instant Art, Flash Art, Phone Book, Excel_Writer, ADODB), Tools (with sub-options like phpMyAdmin, Webalizer, PHP Switch, Mercury Mail, FileZilla FTP), and Specials (with sub-options like PHP PostScript, PHP Paradox). At the bottom of the menu is a copyright notice: ©2002-2006 APACHE FRIENDS... In the center, under the heading "Welcome to XAMPP for Windows Version 1.6.6a!", it says "Congratulations! You have successfully installed XAMPP on this system! Now you can start using Apache and Co. You should first try »Status« on the left navigation to make sure everything works fine. For OpenSSL support please use the test certificate with <https://127.0.0.1> or <https://localhost>. For this release a special thanks to [Uwe Steinmann](#) for his excellent development and compilation of all current "Special" modules! Good luck, Kay Vogelgesang + Kai 'Oswald' Seidler".

To test the XML scripts, direct your Web browser to <http://localhost/xml/area/area.php>. You should see the following page:

This screenshot shows a page from an Aastra XML application. It contains the following text: "This XML application works better when using an Aastra IP phone, not a web browser. See [here](#) for instructions and information. Copyright Aastra Telecom 2008."

11.2.5 TROUBLESHOOTING APACHE

Most common problem is that another program is already using TCP server port 80 (HTTP) and port 443 (HTTPS).

Run the program **xampp-portcheck.exe** in the xampp directory.



Check which program is using server port 80 and/or 443. Shutdown that program.

11.3 APPLICATIONS

This chapter describes all the sample applications available either from the Internet or from XAMPP running on a server (represented below as myserver.com).

11.3.1 AREA CODE LOOKUP (US/CANADA)

Description			
This application allows the user to lookup for the State/Cities of any given US area code.			
Phone compatibility			
✓	Mitel 9143i	✓	Mitel 6753i
✓	Mitel 9480i/9480iCT	✓	Mitel 6755i/6735i
✓	Mitel 6739i	✓	Mitel 6757i/57iCT/6737i/6867i/6869i

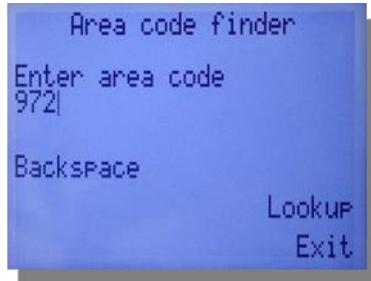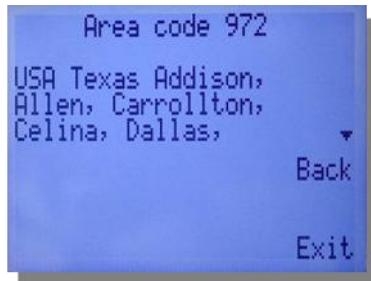✓	Mitel 6730i/6731i/6863i/6865i		
Configuration (Internet)			
uri=http://65.36.55.137/xml/area/area.php			
Configuration (XAMPP)			
uri=http://myserver.com/xml/area/area.php			
Screenshots			
 			

11.3.2 BIORHYTHMS

Description			
Check your Biorhythms.			
Phone compatibility			
✓	Mitel 9143i	✓	Mitel 6753i
✓	Mitel 9480i/9480iCT	✓	Mitel 6755i/6735i
✓	Mitel 6739i	✓	Mitel 6757i/57iCT/6737i/6867i/6869i
✓	Mitel 6730i/6731i/6863i/6865i		
Configuration (Internet)			
uri=http://65.36.55.137/xml/games/biorhythms.php			
Configuration (XAMPP)			
uri=http://myserver.com/xml/games/biorhythms.php			
Screenshots (55i/57i67/35i/6737i)			

Comments

User's birth date is stored on the server.
Only phones with bitmap display (6755i/6757i, 6757iCT, 6735i and 6737i) or graphical display (6867i, 6869i and 6839i) will display the charts
PHP-GD extension is needed for this XML script.

11.3.3 CNN NEWS


Description	
RSS feed from CNN.com including the following topics:	
Top Stories	Entertainment
World	Travel
U.S.	Education
Politics	Video
Law	Offbeat
Technology	Most Popular
Science and Space	Most Recent
Health	
Phone compatibility	
✓ Mitel 9143i	✓ Mitel 6753i
✓ Mitel 9480i/9480iCT	✓ Mitel 6755i/6735i
✓ Mitel 6739i	✓ Mitel 6757i/57iCT/6737i/6867i/6869i
✓ Mitel 6730i/6731i/6863i/6865i	
Configuration (Internet)	

uri=http://65.36.55.137/xml/rss/rss.php?feed=cnn

Configuration (XAMPP)

uri=http://myserver.com/xml/rss/rss.php?feed=cnn

Screenshots

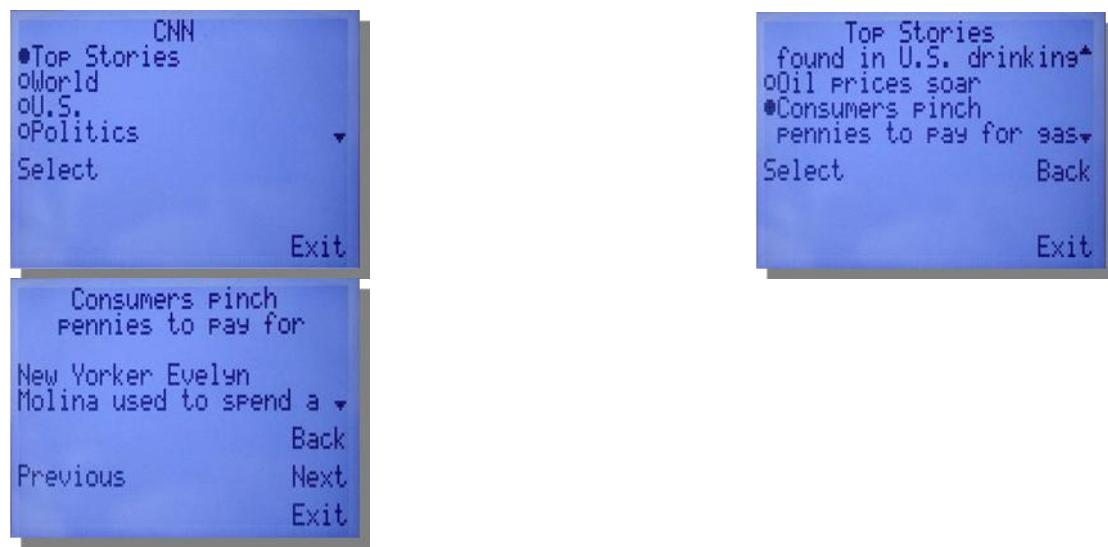

11.3.4 CURRENCY CONVERTER

Description

This application uses www.yahoo.com to convert any currency in to another currency. It also allows the user to setup a list of favorite conversions.

Phone compatibility

x	Mitel 9143i	x	Mitel 6753i
✓	Mitel 9480i/9480iCT	✓	Mitel 6755i/6735i
✓	Mitel 6739i	✓	Mitel 6757i/57iCT/6737i/6867i/6869i
x	Mitel 6730i/6731i/6863i/6865i		


Configuration (Internet)

uri=http://65.36.55.137/xml/stock/currency.php

Configuration (XAMPP)

uri=http://myserver.com/xml/stock/currency.php

Screenshots

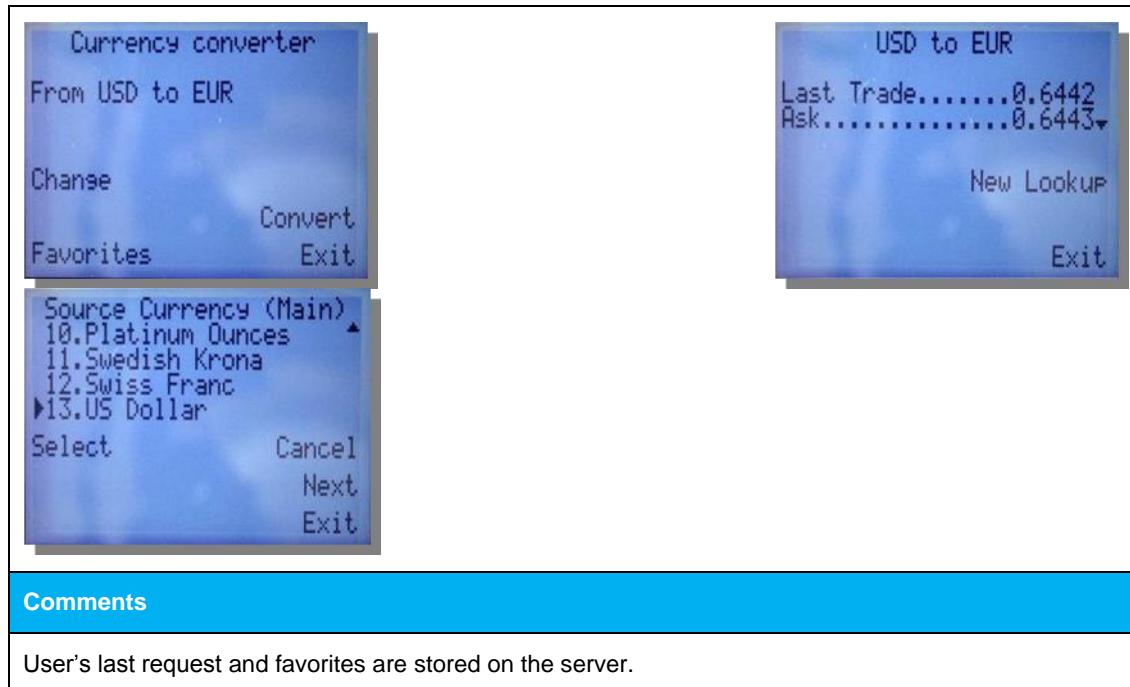

Comments

User's last request and favorites are stored on the server.

11.3.5 ESPN NEWS

Description

RSS feed from ESPN.com bringing news for the most popular sports in North America.

Top Headlines	Motorsports
NFL	Soccer
NBA	College Basketball
MLB	College Football
NHL	

Phone compatibility

✓	Mitel 9143i	✓	Mitel 6753i
✓	Mitel 9480i/9480iCT	✓	Mitel 6755i/6735i
✓	Mitel 6739i	✓	Mitel 6757i/57iCT/6737i/6867i/6869i
✓	Mitel 6730i/6731i/6863i/6865i		


Configuration (Internet)

uri=http://65.36.55.137/xml/rss/rss.php?feed=espn

Configuration (XAMPP)


uri=http://myserver.com/xml/rss/rss.php?feed=espn

Screenshots

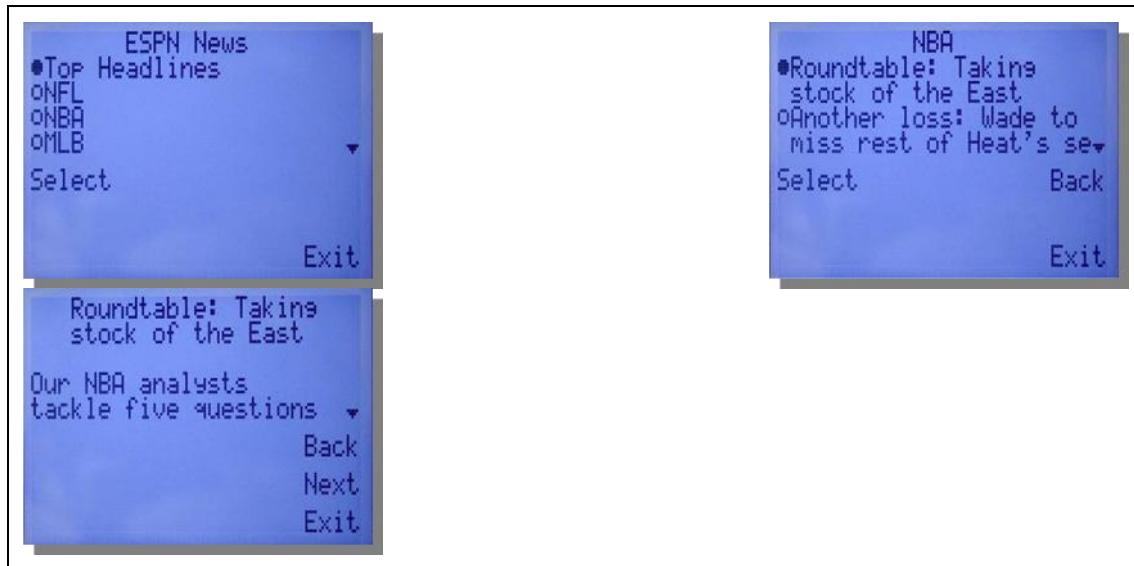

11.3.6 FOX NEWS

Description	
RSS feed from foxnews.com including the following topics:	
Latest Headlines	Business
National	SciTech
World	Health
Politics	Entertainment
Phone compatibility	
✓ Mitel 9143i	✓ Mitel 6753i
✓ Mitel 9480i/9480iCT	✓ Mitel 6755i/6735i
✓ Mitel 6739i	✓ Mitel 6757i/57iCT/6737i/6867i/6869i
✓ Mitel 6730i/6731i/6863i/6865i	
Configuration (Internet)	
uri=http://65.36.55.137/xml/rss/rss.php?feed=fox	
Configuration (XAMPP)	
uri=http://myserver.com/xml/rss/rss.php?feed=fox	
Screenshots	

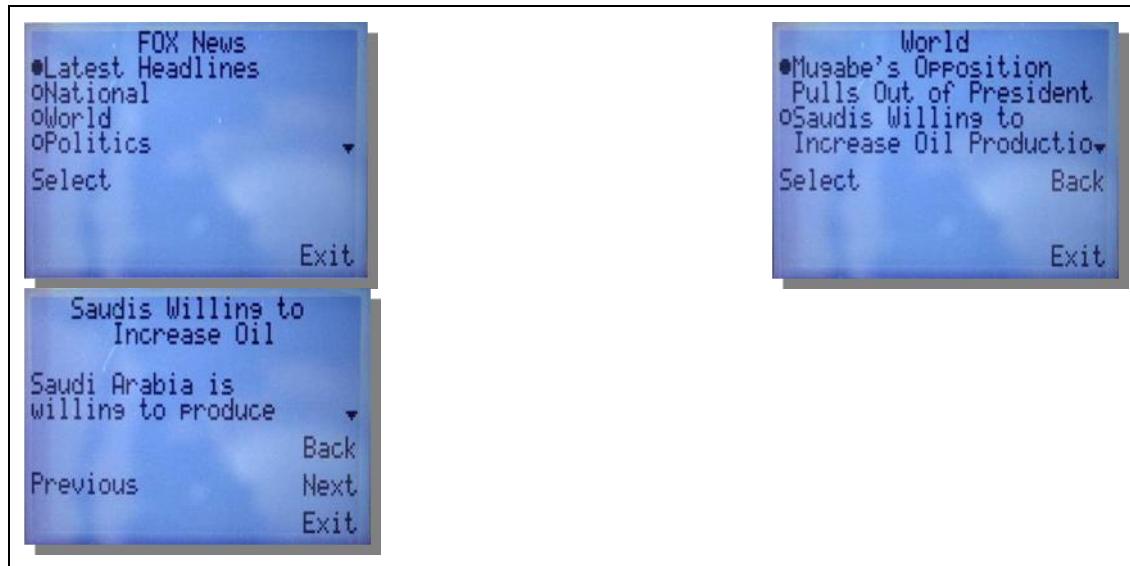

11.3.7 HOROSCOPE


Description			
RSS feed from dailyhoroscopes.com.			
Phone compatibility			
✓	Mitel 9143i	✓	Mitel 6753i
✓	Mitel 9480i/9480iCT	✓	Mitel 6755i/6735i
✓	Mitel 6739i	✓	Mitel 6757i/57iCT/6737i/6867i/6869i
✓	Mitel 6730i/6731i/6863i/6865i		
Configuration (Internet)			
uri=http://65.36.55.137/xml/rss/rss.php?feed=horoscope			
Configuration (XAMPP)			
uri=http://myserver.com/xml/rss/rss.php?feed=horoscope			
Screenshots			

11.3.8 IP GEOLOCATION

Description			
Identify the location (Country, City...) of any given public IP address. This application uses an API provided by http://www.geoplugin.net .			
Phone compatibility			
✓	Aastra480i/480iCT	✓	Mitel 6739i
✓	Mitel 9143i	✓	Mitel 6753i
✓	Mitel 9480i/9480iCT	✓	Mitel 6755i/6735i
✓	Mitel 6730i/6731i/6863i/6865i	✓	Mitel 6757i/6757iCT/6737i/6867i/6869i
Configuration (Internet)			
uri= http://65.36.55.137/xml/area/ip.php			
Configuration (XAMPP)			
uri= http://myserver.com/xml/area/ip.php			


11.3.9 MOVIES

Description			
RSS feed from yahoo.com including the following topics:			
Top 10 Box Office Opening This Week Coming Soon			
Phone compatibility			
✓	Mitel 9143i	✓	Mitel 6753i
✓	Mitel 9480i/9480iCT	✓	Mitel 6755i/6735i
✓	Mitel 6739i	✓	Mitel 6757i/57iCT/6737i/6867i/6869i
✓	Mitel 6730i/6731i/6863i/6865i		
Configuration (Internet)			
uri= http://65.36.55.137/xml/rss/rss.php?feed=movies			
Configuration (XAMPP)			
uri= http://myserver.com/xml/rss/rss.php?feed=movies			
Screenshots			

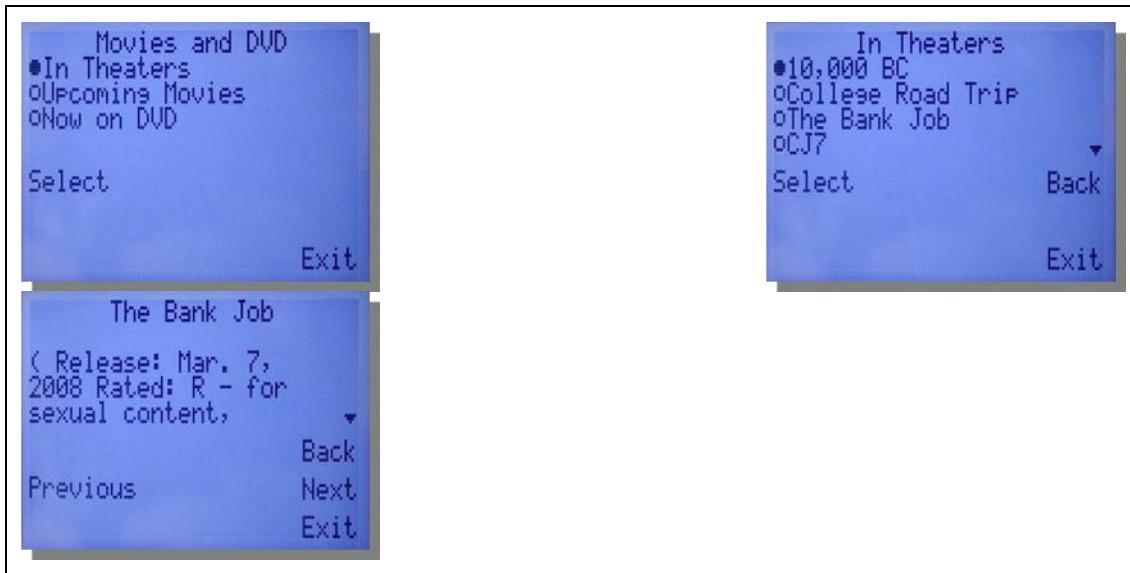

11.3.10 NETFLIX

Description			
RSS feed from netflix.com including the following topics:			
Top 100		Horror Top 25	
New Releases*		Sci-Fi Top 25	
Action/adventure Top 25		Television Top 25	
Comedy Top 25		Thrillers Top 25	
Drama Top 25			
Phone compatibility			
✓ Mitel 9143i	✓	Mitel 6753i	
✓ Mitel 9480i/9480iCT	✓	Mitel 6755i/6735i	
✓ Mitel 6751i	✓	Mitel 6757i/57iCT/6737i/6867i/6869i	
✓ Mitel 6730i/6731i/6863i/6865i	✓	Mitel 6739i	
Configuration (Internet)			
uri=http://65.36.55.137/xml/rss/rss.php?feed=netflix			
Configuration (XAMPP)			
uri=http://myserver.com/xml/rss/rss.php?feed=netflix			
Screenshots			

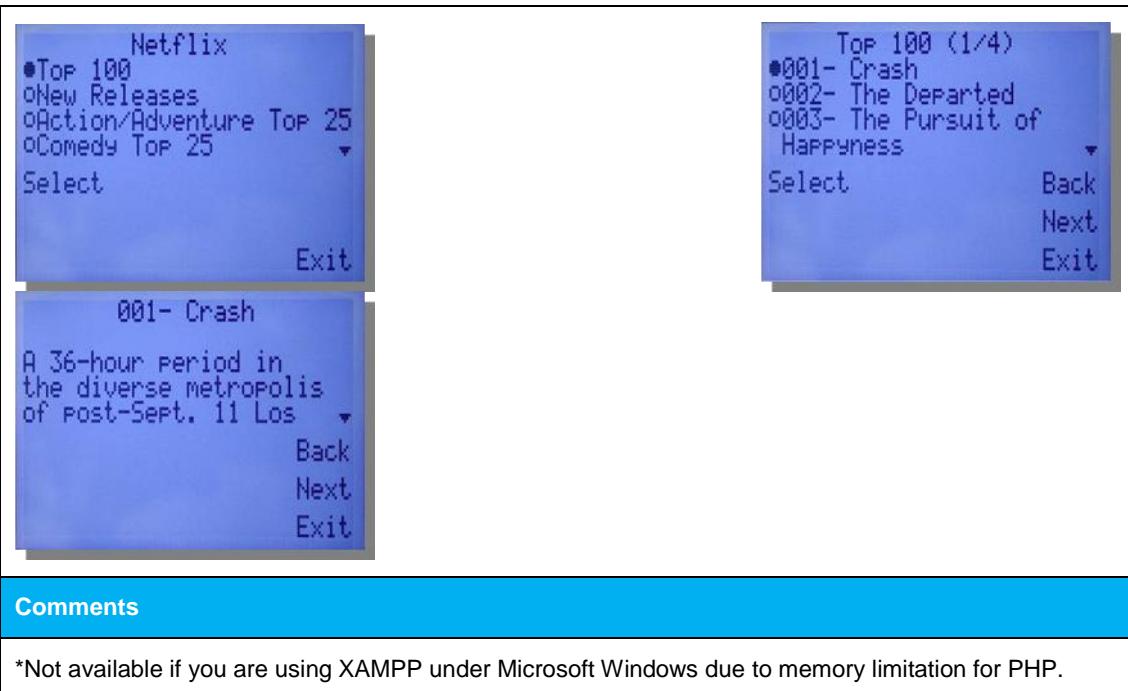

Comments

*Not available if you are using XAMPP under Microsoft Windows due to memory limitation for PHP.

11.3.11 STOCK QUOTES

Description			
This application uses www.yahoo.com to get the value of any given stock. Please refer to yahoo.com for the syntax of the stock ticker.			
Phone compatibility			
✓	Mitel 9143i	✓	Mitel 6753i
✓	Mitel 9480i/9480iCT	✓	Mitel 6755i/6735i
✓	Mitel 6739i	✓	Mitel 6757i/57iCT/6737i/6867i/6869i
✓	Mitel 6730i/6731i/6863i/6865i		
Configuration (Internet)			
uri=http://65.36.55.137/xml/stock/stock.php			
Configuration (XAMPP)			
uri=http://myserver.com/xml/stock/stock.php			
Screenshots			

Comments

User's last request and favorites are stored on the server.
Only large screen phones have access to the favorites.

11.3.12 TODAY...

Description			
RSS feed from answers.com including the following topics: Word of the Day Birthdays today This day in History Quote of the Day			
Phone compatibility			
✓	Mitel 9143i	✓	Mitel 6753i
✓	Mitel 9480i/9480iCT	✓	Mitel 6755i/6735i
✓	Mitel 6739i	✓	Mitel 6757i/57iCT/6737i/6867i/6869i
✓	Mitel 6730i/6731i/6863i/6865i		
Configuration (Internet)			
uri=http://65.205.17.13/xml/rss/rss.php?feed=day			
Configuration (XAMPP)			
uri=http://myserver.com/xml/rss/rss.php?feed=day			
Screenshots			




11.3.13 LOCAL WEATHER

Description	
RSS feed from rssweather.com providing weather forecast for any given US ZIP code	
Phone compatibility	
✓ Mitel 9143i	✓ Mitel 6753i
✓ Mitel 9480i/9480iCT	✓ Mitel 6755i/6735i
✓ Mitel 6739i	✓ Mitel 6757i/57iCT/6737i/6867i/6869i
✓ Mitel 6730i/6731i/6863i/6865i	
Configuration (Internet)	
uri=http://65.36.55.137/xml/weather/weather.php	
Configuration (XAMPP)	
uri=http://myserver.com/xml/weather/weather.php	
Screenshots	
Comments	


User's last request is stored on the server

11.3.14 WORLD CLOCK

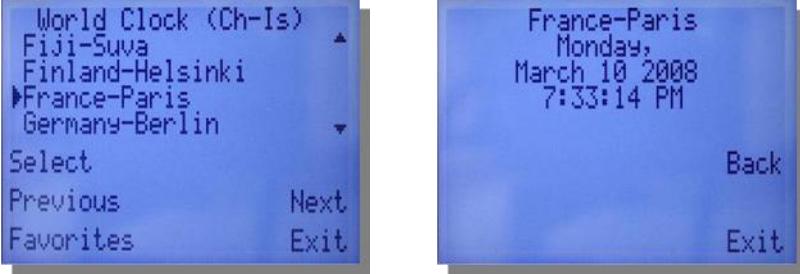Description			
Date and time from around the world using www.timeanddate.com . It allows the user to define a list of favorite cities for quick access.			
Phone compatibility			
✓ Mitel 9143i	✓ Mitel 6753i		
✓ Mitel 9480i/9480iCT	✓ Mitel 6755i/6735i		
✓ Mitel 6739i	✓ Mitel 6757i/57iCT/6737i/6867i/6869i		
✓ Mitel 6730i/6731i/6863i/6865i			
Configuration (Internet)			
uri=http://65.36.55.137/xml/clock/clock.php			
Configuration (XAMPP)			
uri=http://myserver.com/xml/clock/clock.php			
Screenshots			
			


11.3.15 YAHTZEE

Description			
A Yahtzee game...			
Phone compatibility			
✗ Mitel 9143i	✗ Mitel 6753i		
✗ Mitel 9480i/9480iCT	✓ Mitel 6755i/6735i		
✗ Mitel 6739i	✓ Mitel 6757i/57iCT/6737i/6867i/6869i		
✗ Mitel 6730i/6731i/6863i/6865i			

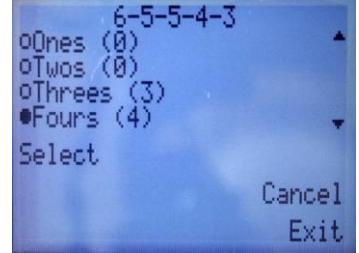Configuration (Internet)
uri=http://65.36.55.137/xml/games/yahtzee.php
Configuration (XAMPP)
uri=http://myserver.com/xml/games/yahtzee.php
Screenshots
 

11.3.16 GLOBAL MENU

Description																
This application is an XML application agragator. It can be configured as an XML key or as the XML custom menu behind the “Services” key (not supported on 9143i and 6753i).																
Phone compatibility																
<table border="1"> <tr> <td>✓</td> <td>Mitel 9143i</td> <td>✓</td> <td>Mitel 6753i</td> </tr> <tr> <td>✓</td> <td>Mitel 9480i/9480iCT</td> <td>✓</td> <td>Mitel 6755i/6735i</td> </tr> <tr> <td>✓</td> <td>Mitel 6739i</td> <td>✓</td> <td>Mitel 6757i/57iCT/6737i/6867i/6869i</td> </tr> <tr> <td>✓</td> <td>Mitel 6730i/6731i/6863i/6865i</td> <td></td> <td></td> </tr> </table>	✓	Mitel 9143i	✓	Mitel 6753i	✓	Mitel 9480i/9480iCT	✓	Mitel 6755i/6735i	✓	Mitel 6739i	✓	Mitel 6757i/57iCT/6737i/6867i/6869i	✓	Mitel 6730i/6731i/6863i/6865i		
✓	Mitel 9143i	✓	Mitel 6753i													
✓	Mitel 9480i/9480iCT	✓	Mitel 6755i/6735i													
✓	Mitel 6739i	✓	Mitel 6757i/57iCT/6737i/6867i/6869i													
✓	Mitel 6730i/6731i/6863i/6865i															
Configuration (Internet)																
uri=http://65.36.55.137/xml/menu/mymenu.php																
Configuration (XAMPP)																
uri=http://myserver.com/xml/menu/mymenu.php																
Screenshots																

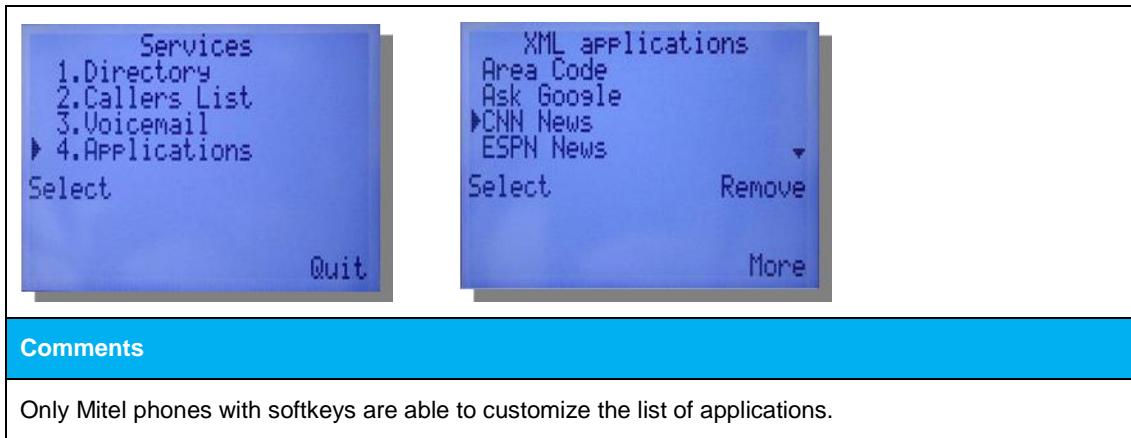

12 APPENDIX A: XSL MODEL

```
<?xml version="1.0" encoding="UTF-8" ?>
<xss:schema xmlns:xss="http://www.w3.org/2001/XMLSchema">

<xss:simpleType name="textAttributeType">
    <xss:restriction base="xss:string">
        <xss:pattern value="yes|no" />
    </xss:restriction>
</xss:simpleType>

<xss:simpleType name="modeType">
    <xss:restriction base="xss:string">
        <xss:pattern value="normal|extended|fullscreen" />
    </xss:restriction>
</xss:simpleType>

<xss:simpleType name="integerAttributeType">
    <xss:restriction base="xss:integer" />
</xss:simpleType>

<xss:simpleType name="verticalAlignType">
    <xss:restriction base="xss:string">
        <xss:pattern value="top|middle|bottom" />
    </xss:restriction>
</xss:simpleType>

<xss:simpleType name="horizontalAlignType">
    <xss:restriction base="xss:string">
        <xss:pattern value="left|middle|right" />
    </xss:restriction>
</xss:simpleType>

<xss:simpleType name="colorType">
    <xss:restriction base="xss:string">
        <xss:pattern value="white|
                                black|
                                red|
                                green|
                                brown|
                                blue|
                                magenta|
                                cyan|
                                lightgray|
                                darkgray|
                                lightred|
                                lightgreen|
                                yellow|
                                lightblue|
                                lightmagenta|
                                lightcyan|
                                " />
    </xss:restriction>
</xss:simpleType>

<xss:complexType name="titleTagType" mixed="true">
    <xss:attribute name="wrap" default="yes">
        <xss:simpleType>
            <xss:restriction base="xss:string">
                <xss:pattern value="yes|no"/>
            </xss:restriction>
        </xss:simpleType>
    </xss:attribute>
```

```

</xs:complexType>

<xs:complexType name="lineTagType" mixed="true">
  <xs:attribute name="Color" default="white" type="colorType"/>
  <xs:attribute name="Size" default="regular">
    <xs:simpleType>
      <xs:restriction base="xs:string">
        <xs:pattern value="double|regular|small|large" />
      </xs:restriction>
    </xs:simpleType>
  </xs:attribute>
  <xs:attribute name="Align" default="left">
    <xs:simpleType>
      <xs:restriction base="xs:string">
        <xs:pattern value="right|left|center" />
      </xs:restriction>
    </xs:simpleType>
  </xs:attribute>
</xs:complexType>

<xs:complexType name="imageType" mixed="true">
  <xs:attribute name="verticalAlign" type="verticalAlignType" />
  <xs:attribute name="horizontalAlign" type="horizontalAlignType" />
  <xs:attribute name="height">
    <xs:simpleType>
      <xs:restriction base="xs:integer">
        <xs:minInclusive value="0" />
        <xs:maxInclusive value="40" />
      </xs:restriction>
    </xs:simpleType>
  </xs:attribute>
  <xs:attribute name="width" type="integerAttributeType" default="0" />
</xs:complexType>

<xs:complexType name="softKeyType">
  <xs:sequence>
    <xs:element name="Label" type="xs:string" />
    <xs:element name="URI" type="xs:string" />
  </xs:sequence>
  <xs:attribute name="index" use="required">
    <xs:simpleType>
      <xs:restriction base="xs:integer">
        <xs:minInclusive value="1" />
        <xs:maxInclusive value="10" />
      </xs:restriction>
    </xs:simpleType>
  </xs:attribute>
  <xs:attribute name="icon" type="integerAttributeType" default="0" />
</xs:complexType>

<xs:complexType name="iconListType">
  <xs:sequence>
    <xs:element name="Icon" minOccurs="1" maxOccurs="unbounded">
      <xs:complexType mixed="true">
        <xs:attribute name="index" type="integerAttributeType" use="required" />
      </xs:complexType>
    </xs:element>
  </xs:sequence>
</xs:complexType>

<xs:element name="AastraIPPhoneTextScreen">
  <xs:complexType>
    <xs:sequence>

```

```

<xs:element name="Title" type="titleTagType" minOccurs="0" maxOccurs="1"/>
<xs:element name="Text">
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:minLength value="1" />
      <xsmaxLength value="2000" />
    </xs:restriction>
  </xs:simpleType>
</xs:element>
<xs:element name="Dial" minOccurs="0" maxOccurs="1">
  <xs:complexType>
    <xs:attribute name="line" use="optional">
      <xs:simpleType>
        <xs:restriction base="xs:integer">
          <xs:minInclusive value="1" />
          <xs:maxInclusive value="24" />
        </xs:restriction>
      </xs:simpleType>
    </xs:attribute>
  </xs:complexType>
</xs:element>
<xs:element name="SoftKey" type="softKeyType" minOccurs="0" maxOccurs="10"/>
</xs:sequence>
<xs:attribute name="destroyOnExit" type="textAttributeType" default="no" />
<xs:attribute name="Beep" type="textAttributeType" default="no" />
<xs:attribute name="LockIn" type="textAttributeType" default="no" />
<xs:attribute name="Timeout" type="integerAttributeType" default="45" />
<xs:attribute name="cancelAction" type="xs:string" />
<xs:attribute name="doneAction" type="xs:string" />
<xs:attribute name="allowAnswer" type="xs:string" default="no" />
<xs:attribute name="allowDTMF" type="xs:string" default="no" />
<xs:attribute name="allowDrop" type="xs:string" default="no" />
<xs:attribute name="allowConf" type="xs:string" default="no" />
<xs:attribute name="allowXfer" type="xs:string" default="no" />
</xs:complexType>
</xs:element>

<xs:element name="AastraIPPhoneTextMenu">
  <xs:complexType>
    <xs:sequence>
      <xs:element name="Title" type="titleTagType" minOccurs="0" maxOccurs="1"/>
      <xs:element name="MenuItem" minOccurs="1" maxOccurs="30">
        <xs:complexType>
          <xs:all>
            <xs:element name="Prompt" type="xs:string" minOccurs="0" maxOccurs="1" />
            <xs:element name="URI" type="xs:string" minOccurs="0" maxOccurs="1" />
            <xs:element name="Dial" minOccurs="0" maxOccurs="1">
              <xs:complexType>
                <xs:attribute name="line" use="optional">
                  <xs:simpleType>
                    <xs:restriction base="xs:integer">
                      <xs:minInclusive value="1" />
                      <xs:maxInclusive value="24" />
                    </xs:restriction>
                  </xs:simpleType>
                </xs:attribute>
              </xs:complexType>
            </xs:element>
          </xs:all>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

```

        <xs:element name="Selection" type="xs:string" minOccurs="0" maxOccurs="1"
/>
    </xs:all>
    <xs:attribute name="base" type="xs:string" />
    <xs:attribute name="icon" type="integerAttributeType" default="0" />
    </xs:complexType>
</xs:element>
<xs:element name="SoftKey" type="softKeyType" minOccurs="0" maxOccurs="10"
/>
    <xs:element name="IconList" type="iconListType" minOccurs="0" maxOccurs="1"
/>
    </xs:sequence>
    <xs:attribute name="destroyOnExit" type="textAttributeType" default="no"
/>
    <xs:attribute name="Beep" type="textAttributeType" default="no"
/>
    <xs:attribute name="LockIn" type="textAttributeType" default="no"
/>
    <xs:attribute name="Timeout" type="integerAttributeType" default="45"
/>
    <xs:attribute name="defaultIndex" type="integerAttributeType" default="1"
/>
    <xs:attribute name="cancelAction" type="xs:string" />
    <xs:attribute name="style" type="xs:string" default="numbered" />
    <xs:attribute name="allowAnswer" type="xs:string" default="no" />
    <xs:attribute name="wrapList" type="textAttributeType" default="no" />
    <xs:attribute name="numberLaunch" type="textAttributeType" default="no" />
    <xs:attribute name="scrollConstrain" type="textAttributeType" default="no"
/>
    <xs:attribute name="unitScroll" type="textAttributeType" default="no"
/>
    <xs:attribute name="scrollUp" type="xs:string" />
    <xs:attribute name="scrollDown" type="xs:string" />
    <xs:attribute name="allowDrop" type="xs:string" default="no" />
    <xs:attribute name="allowConf" type="xs:string" default="no" />
    <xs:attribute name="allowXfer" type="xs:string" default="no" />
</xs:complexType>
</xs:element>

<xs:element name="AastralIPPhoneInputScreen">
<xs:complexType>
<xs:sequence>
    <xs:element name="Title" type="titleTagType" minOccurs="0" maxOccurs="1" />
    <xs:element name="Prompt" minOccurs="0" maxOccurs="1" />
    <xs:element name="URL" />
    <xs:element name="Parameter" minOccurs="0" maxOccurs="1" />
    <xs:element name="Default" minOccurs="0" maxOccurs="1" />
    <xs:element name="Selection" minOccurs="0" maxOccurs="1" />
    <xs:element name="InputField" minOccurs="0" maxOccurs="10">
        <xs:complexType>
            <xs:sequence>
                <xs:element name="Prompt" minOccurs="0" maxOccurs="1" />
                <xs:element name="Parameter" minOccurs="0" maxOccurs="1" />
                <xs:element name="Default" minOccurs="0" maxOccurs="1" />
                <xs:element name="Selection" minOccurs="0" maxOccurs="1" />
                <xs:element name="SoftKey" type="softKeyType" minOccurs="0"
maxOccurs="10" />
            </xs:sequence>
            <xs:attribute name="type" use="optional">
                <xs:simpleType>
                    <xs:restriction base="xs:string">
                        <xs:pattern
value="IP|string|stringN|number|timeUS|dateUS|timeInt|dateInt|Empty" />

```

```

                </xs:restriction>
            </xs:simpleType>
        </xs:attribute>
        <xs:attribute name="password" type="textAttributeType"
default="no" />
        <xs:attribute name="editable" type="textAttributeType"
default="yes" />
        </xs:complexType>
    </xs:element>
</xs:sequence>
<xs:attribute name="type" use="required">
    <xs:simpleType>
        <xs:restriction base="xs:string">
            <xs:pattern value="IP|string|stringN|number|timeUS|dateUS|timeInt|dateInt"
/>
        </xs:restriction>
    </xs:simpleType>
</xs:attribute>
<xs:attribute name="password" type="textAttributeType" default="no"
/>
<xs:attribute name="destroyOnExit" type="textAttributeType" default="no"
/>
<xs:attribute name="editable" type="textAttributeType" default="yes"
/>
<xs:attribute name="Beep" type="textAttributeType" default="no"
/>
<xs:attribute name="inputLanguage" use="optional" default="English">
    <xs:simpleType>
        <xs:restriction base="xs:string">
            <xs:pattern
value="English|French|Spanish|German|Italian|Russian|Portuguese|FranÃ§ais|EspaÃ±ol|Deutsch|Italiano|ÃlfÃ³n|PortuguÃ¢s|Nordic" />
        </xs:restriction>
    </xs:simpleType>
</xs:attribute>
<xs:attribute name="LockIn" type="textAttributeType" default="no"
/>
<xs:attribute name="Timeout" type="integerAttributeType" default="45"
/>
<xs:attribute name="defaultIndex" type="integerAttributeType" default="1" />
<xs:attribute name="cancelAction" type="xs:string" />
<xs:attribute name="allowAnswer" type="xs:string" default="no"/>
<xs:attribute name="allowDrop" type="xs:string" default="no"/>
<xs:attribute name="allowConf" type="xs:string" default="no"/>
<xs:attribute name="allowXfer" type="xs:string" default="no"/>
<xs:attribute name="displayMode" default="uncondensed">
    <xs:simpleType>
        <xs:restriction base="xs:string">
            <xs:pattern value="condensed|uncondensed" />
        </xs:restriction>
    </xs:simpleType>
</xs:attribute>
</xs:complexType>
</xs:element>

<xs:element name="AastralIPPhoneDirectory">
    <xs:complexType>
        <xs:sequence>
            <xs:element name="Title" type="xs:string" />
            <xs:element name="MenuItem" minOccurs="1" maxOccurs="15">
                <xs:complexType>
                    <xs:sequence>
                        <xs:element name="Prompt" type="xs:string" />

```

```

<xs:element name="URI" type="xs:string" />
</xs:sequence>
<xs:attribute name="base" type="xs:string" />
<xs:attribute name="icon" type="integerAttributeType" default="0" />
</xs:complexType>
</xs:element>
<xs:element name="SoftKey" type="softKeyType" minOccurs="0" maxOccurs="10" />
<xs:element name="IconList" type="iconListType" minOccurs="0" maxOccurs="1" />
</xs:sequence>
<xs:attribute name="destroyOnExit" type="textAttributeType" default="no" />
<xs:attribute name="Beep" type="textAttributeType" default="no" />
<xs:attribute name="LockIn" type="textAttributeType" default="no" />
</xs:attribute>
<xs:attribute name="Timeout" type="integerAttributeType" default="45" />
<xs:attribute name="next" type="xs:string" />
<xs:attribute name="previous" type="xs:string" />
<xs:attribute name="cancelAction" type="xs:string" />
</xs:complexType>
</xs:element>

<xs:element name="AastraIPPhoneExecute">
<xs:complexType>
<xs:sequence>
<xs:element name="ExecuteItem" minOccurs="0" maxOccurs="unbounded">
<xs:complexType>
<xs:attribute name="URI" type="xs:string" />
<xs:attribute name="interruptCall" type="textAttributeType" default="yes" />
</xs:complexType>
</xs:element>
</xs:sequence>
<xs:attribute name="Beep" type="textAttributeType" default="no" />
<xs:attribute name="triggerDestroyOnExit" type="textAttributeType" default="no" />
</xs:complexType>
</xs:element>

<xs:element name="AastraIPPhoneStatus">
<xs:complexType>
<xs:sequence>
<xs:element name="Session" type="xs:string" minOccurs="0" />
<xs:element name="Message">
<xs:complexType mixed="true">
<xs:attribute name="index" type="integerAttributeType" use="required" />
<xs:attribute name="type">
<xs:simpleType>
<xs:restriction base="xs:string">
<xs:pattern value="alert" />
</xs:restriction>
</xs:simpleType>
</xs:attribute>
<xs:attribute name="Timeout" type="integerAttributeType" default="3" />
<xs:attribute name="URI" type="xs:string" />
<xs:attribute name="icon" type="integerAttributeType" default="0" />
</xs:complexType>
</xs:element>
<xs:element name="IconList" type="iconListType" minOccurs="0" maxOccurs="1" />
</xs:sequence>

```

```

<xs:attribute name="Beep" type="textAttributeType" default="no" />
<xs:attribute name="triggerDestroyOnExit" type="textAttributeType"
default="no" />
</xs:complexType>
</xs:element>

<xs:element name="AastraIPPhoneConfiguration">
<xs:complexType>
<xs:sequence>
<xs:element name="ConfigurationItem" minOccurs="0" maxOccurs="unbounded">
<xs:complexType>
<xs:sequence>
<xs:element name="Parameter" type="xs:string" />
<xs:element name="Value" type="xs:string" />
</xs:sequence>
</xs:complexType>
</xs:element>
</xs:sequence>
<xs:attribute name="Beep" type="textAttributeType" default="no" />
<xs:attribute name="triggerDestroyOnExit" type="textAttributeType"
default="no" />
</xs:complexType>
</xs:element>

<xs:group name="linesAndScroll">
<xs:sequence>
<xs:element name="Scroll" minOccurs="1" maxOccurs="1">
<xs:complexType>
<xs:sequence>
<xs:element name="Line" type="lineTagType" minOccurs="1"
maxOccurs="unbounded" />
</xs:sequence>
<xs:attribute name="Height" type="integerAttributeType"
default="1" />
</xs:complexType>
</xs:element>
<xs:element name="Line" type="lineTagType" minOccurs="0"
maxOccurs="unbounded" />
</xs:sequence>
</xs:group>

<xs:element name="AastraIPPhoneFormattedTextScreen">
<xs:complexType>
<xs:sequence>
<xs:element name="Line" type="lineTagType" minOccurs="0"
maxOccurs="unbounded" />
<xs:group ref="linesAndScroll" minOccurs="0" maxOccurs="1"/>
<xs:element name="Dial" minOccurs="0" maxOccurs="1">
<xs:complexType>
<xs:attribute name="line" use="optional">
<xs:simpleType>
<xs:restriction base="xs:integer">
<xs:minInclusive value="1" />
<xs:maxInclusive value="24" />
</xs:restriction>
</xs:simpleType>
</xs:attribute>
</xs:complexType>
</xs:element>
<xs:element name="SoftKey" type="softKeyType" minOccurs="0" maxOccurs="10"
/>
</xs:sequence>

```

```

<xs:attribute name="destroyOnExit" type="textAttributeType" default="no"
/>
<xs:attribute name="Beep" type="textAttributeType" default="no"
/>
<xs:attribute name="LockIn" type="textAttributeType" default="no"
/>
<xs:attribute name="Timeout" type="integerAttributeType" default="45"
/>
<xs:attribute name="cancelAction" type="xs:string" />
<xs:attribute name="doneAction" type="xs:string" />
<xs:attribute name="allowAnswer" type="xs:string" default="no"/>
<xs:attribute name="allowDTMF" type="xs:string" default="no"/>
<xs:attribute name="allowDrop" type="xs:string" default="no"/>
<xs:attribute name="allowConf" type="xs:string" default="no"/>
<xs:attribute name="allowXfer" type="xs:string" default="no"/>
</xs:complexType>
</xs:element>

<xs:element name="AastraIPPhoneImageScreen">
<xs:complexType>
<xs:sequence>
<xs:element name="Image" type="imageType" />
<xs:element name="SoftKey" type="softKeyType" minOccurs="0" maxOccurs="10"
/>
</xs:sequence>
<xs:attribute name="destroyOnExit" type="textAttributeType" default="no"
/>
<xs:attribute name="Beep" type="textAttributeType" default="no"
/>
<xs:attribute name="mode" type="modeType" default="normal" />
<xs:attribute name="LockIn" type="textAttributeType" default="no"
/>
<xs:attribute name="Timeout" type="integerAttributeType" default="45"
/>
<xs:attribute name="imageAction" type="xs:string" />
<xs:attribute name="doneAction" type="xs:string" />
<xs:attribute name="cancelAction" type="xs:string" />
<xs:attribute name="allowDTMF" type="xs:string" default="no"/>
</xs:complexType>
</xs:element>

<xs:element name="AastraIPPhoneImageMenu">
<xs:complexType>
<xs:sequence>
<xs:element name="Image" type="imageType" />
<xs:element name="URIList">
<xs:complexType>
<xs:sequence>
<xs:element name="URI" minOccurs="0" maxOccurs="12">
<xs:complexType mixed="true">
<xs:attribute name="base" />
<xs:attribute name="key" use="required" >
<xs:simpleType>
<xs:restriction base="xs:string">
<xs:pattern value="[0-9]|\#|\\*" />
</xs:restriction>
</xs:simpleType>
</xs:attribute>
</xs:complexType>
</xs:element>
</xs:sequence>
</xs:complexType>

```

```
</xs:element>
<xs:element name="SoftKey" type="softKeyType" minOccurs="0"
maxOccurs="10" />
<xs:element name="IconList" type="iconListType" minOccurs="0" maxOccurs="1"
/>
</xs:sequence>
<xs:attribute name="destroyOnExit" type="textAttributeType" default="no"
/>
<xs:attribute name="Beep" type="textAttributeType" default="no"
/>
<xs:attribute name="mode" type="modeType" default="normal" />
<xs:attribute name="LockIn" type="textAttributeType" default="no"
/>
<xs:attribute name="Timeout" type="integerAttributeType" default="45"
/>
<xs:attribute name="imageAction" type="xs:string" />
<xs:attribute name="doneAction" type="xs:string" />
<xs:attribute name="cancelAction" type="xs:string" />
</xs:complexType>
</xs:element>

</xs:schema>
```

13 APPENDIX B: OBJECT ORIENTED PHP CLASSES

Mitel also provides an object oriented API to develop XML applications which is included in the XML SDK.



Note: The PHP objects are taking care of the XML escape encoding when they are needed.

13.1 AASTRAIPPHONECALLLOG()

This class allows you to create a XML PhoneCallLog object.

Include

AastralIPPhoneCallLog.class.php

Methods

- `setTopTitle(title,color,icon_index)` to set the Top Title of the XML screen (6739i only)
 - title string
 - color string, "red", "blue", ... (optional)
 - icon_index integer, icon number
- `setCancelAction(uri)` to set the cancel parameter with the URI to be called on Cancel (optional)
 - uri string
- `setDestroyOnExit()` to set DestroyonExit parameter to 'yes', 'no' by default (optional)
- `setBeep()` to enable a notification beep with the object (optional)
- `setLockIn(uri)` to set the Lock-in tag to 'yes' and the GoodbyeLockInURI (optional)
 - uri string, GoodByeLockInURI
- `setAllowAnswer()` to set the allowAnswer tag to 'yes' (optional only for non softkey phones)
- `setAllowDrop()` to set the allowDrop tag to 'yes' (optional only for non softkey phones)
- `setAllowXfer()` to set the allowXfer tag to 'yes' (optional only for non softkey phones)
- `setAllowConf()` to set the allowConf tag to 'yes' (optional only for non softkey phones)
- `setTimeout(timeout)` to define a specific timeout for the XML object (optional)
 - timeout integer (seconds)
- `setRefresh(timeout,URL)` to add Refresh parameters to the object (optional)
 - timeout integer (seconds)
 - URL string
- `setEncodingUTF8()` to change encoding from default ISO-8859-1 to UTF-8 (optional)
- `addIcon(index,icon)` to add custom icons to the object (optional)
 - index integer, icon index
 - icon string, icon name or definition
- `generate()` to return the generated XML for the object
- `output(flush)` to display the object
 - flush boolean optional, output buffer to be flushed out or not.
- `addEntry(name,number,date,time,selection,duration,type,terminal,count,line)`
 - name string (optional)

- number string
 - date string MM-DD-YYYY
 - time string HH:MM (military time)
 - selectionstring (optional)
 - duration integer call duration in seconds (optional)
 - type string call type (incoming/outgoing/missed) (optional)
 - terminal string terminal type (office/mobile/home) (optional)
 - count integer number of calls (optional)
 - line integer line used (1-9) (optional)
- setScrollConstrain() to avoid the list to wrap
- setScrollUp(uri) to set the URI to be called when the user presses the Up arrow (optional)
 - uri string
- setScrollDown(uri) to set the URI to be called when the user presses the Down arrow (optional)
 - uri string
- setDeleteUri(uri) to configure the uri called by the "Delete" button (optional)
 - uri string
- setDeleteAllUri(uri) to configure the uri called by the "Delete ALL" button (optional)
 - uri string
- setDialUri(uri) to configure the uri called by the "Dial" button (optional)
 - uri string
- setAddUri(uri) to configure the uri called by the "Add to directory" button(optional)
 - uri string

Example

```

require_once('AastraIPPhoneCallLog.class.php');
$object = new AastraIPPhoneCallLog();
$object->setTopTitle('Callers List','','1');
$object->setDestroyOnExit();
$object->setCancelAction($XML_SERVER);
$object->addEntry('John Doe', '972-555-2345', '01-01-2012', '15:28', '1', '60', 'incoming', 'mobile', '', '1');
$object->addEntry('Jane Doe', '408-555-1234', '01-05-2011', '10:01', '2', '', 'missed', 'home', '2', '1');
$object->setAddUri('http://myserver/myscript.php?action=add');
$object->addIcon('1', 'Icon:Book');
$object->output();

```

In this example, the label and the type of the softkey 1 are changed.

Output



[13.2 AASTRAIPPHONECONFIGURATION\(\)](#)

This class allows you to create a XML PhoneConfiguration object.

Include

- AastralIPPhoneConfiguration.class.php

Methods

- setEncodingUTF8() to change encoding from default ISO-8859-1 to UTF-8 (optional)
- generate() to return the generated XML for the object
- output(flush) to display the object
 - flush boolean optional, output buffer to be flushed out or not.
- setType(type) to set the type of configuration object (optional)
 - type string, configuration change type
- addEntry(parameter,value,type) to add a configuration change
 - parameter string, parameter name
 - value string, parameter value
 - type string, conmfiguration change type (optional)
- setTriggerDestroyOnExit() to set the triggerDestroyOnExit tag to "yes" (optional)

Example

```
require_once('AastralIPPhoneConfiguration.class.php');
$configuration = new AastralIPPhoneConfiguration();
$configuration->addEntry('softkey1 label','Test');
$configuration->addEntry('softkey1 type','xml');
$configuration->setTriggerDestroyOnExit();
$configuration->setBeep();
$configuration->output();
```

In this example, the label and the type of the softkey 1 are changed.

13.3 AASTRAIPPHONEEXECUTE()

This class allows you to create a XML PhoneExecute object.

Include

- AastralIPPhoneExecute.class.php

Methods

- setBeep() to enable a notification beep with the object (optional)
- setEncodingUTF8() to change encoding from default ISO-8859-1 to UTF-8 (optional)
- generate() to return the generated XML for the object
- output(flush) to display the object
 - flush boolean optional, output buffer to be flushed out or not.
- setTriggerDestroyOnExit() to set the triggerDestroyOnExit tag to "yes" (optional)
 - addEntry(url,interruptCall) to add an action to be executed.
 - url string
 - interruptCall string, optional, "yes" or "no"

Example

```
require_once('AastralIPPhoneExecute.class.php');
$execute = new AastralIPPhoneExecute();
$execute->addEntry('http://myserver.com/script.php?choice=2');
$execute->addEntry('Command: Reset');
$execute->output();
```

13.4 AASTRAIPPHONEFORMATTEDTEXTSCREEN()

This class allows you to create a XML FormattedTextScreen object.

Include

- AastralIPPhoneFormattedTextScreen.class.php

Methods

- setTopTitle(title,color,icon_index) to set the Top Title of the XML screen (6739i only)
 - title string
 - color string, "red", "blue", ... (optional)
 - icon_index integer, icon number
- setCancelAction(uri) to set the cancel parameter with the URI to be called on Cancel (optional)
 - uri string
- setDestroyOnExit() to set DestroyonExit parameter to 'yes', 'no' by default (optional)
- setLockIn(uri) to set the Lock-in tag to 'yes' and the GoodbyeLockInURI (optional)
 - uri string, GoodByeLockInURI
- setAllowAnswer() to set the allowAnswer tag to 'yes' (optional)
- setAllowDrop() to set the allowDrop tag to 'yes' (optional)
- setAllowXfer() to set the allowXfer tag to 'yes' (optional)
- setAllowConf() to set the allowConf tag to 'yes' (optional)
- setTimeout(timeout) to define a specific timeout for the XML object (optional)

- timeout integer (seconds)
- addSoftkey(index,label,uri) to add custom softkeys to the object (optional)
 - index integer, softkey number
 - label string
 - uri string
- setRefresh(timeout,URL) to add Refresh parameters to the object (optional)
 - timeout integer (seconds)
 - URL string
- setEncodingUTF8() to change encoding from default ISO-8859-1 to UTF-8 (optional)
- generate() to return the generated XML for the object
- output(flush) to display the object
 - flush boolean optional, output buffer to be flushed out or not.
- addLine(text,size,align,color) to add a formatted line
 - text string
 - size string, optional, "double"
 - align string, optional, "left", "right" or "center"
 - color string, optional
- setScrollStart() to define the beginning of the scrolling section
- setScrollEnd() to define the end of the scrolling section
- setAllowDTMF() to allow DTMF passthrough on the object
- setDial(number,line) to set the number to be dialed as well as the line to use when going off-hook or with the custom softkey Softkey::Dial2
 - number string
 - line integer (optional)


Example

```

require_once('AastraIPPhoneFormattedTextScreen.class.php');
$ftext = new AastraIPPhoneFormattedTextScreen();
$ftext->setDestroyOnExit();
$ftext->addLine('Formatted Screen','double','center','red');
$ftext->setScrollStart();
$ftext->addLine('Scrolled text1');
$ftext->addLine('Scrolled text2');
$ftext->addLine('Scrolled text3');
$ftext->addLine('Scrolled text4');
$ftext->addLine('Scrolled text5');
$ftext->setScrollEnd();
$ftext->addLine('Footer',NULL,'center','blue');
$ftext->addSoftkey('10', 'Exit', 'SoftKey:Exit');
$ftext->output();

```

Output

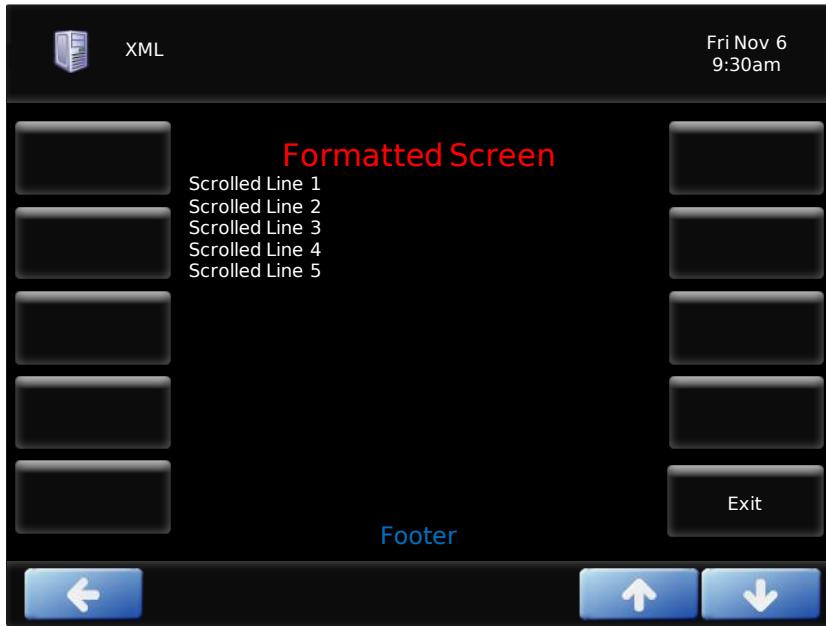

[13.5 AASTRAIPPHONEIMAGEMENU\(\)](#)

This class allows you to create a XML ImageMenu object on 55i/57i/57iCT/6735i/6737i.

Include

- AastralIPPhoneImageMenu.class.php

Methods

- **setTopTitle(title,color,icon_index)** to set the Top Title of the XML screen (6739i only)
 - title string
 - color string, "red", "blue", ... (optional)
 - icon_index integer, icon number
- **setCancelAction(uri)** to set the cancel parameter with the URI to be called on Cancel (optional)
 - uri string
- **setDestroyOnExit()** to set DestroyonExit parameter to 'yes', 'no' by default (optional)
- **setBeep()** to enable a notification beep with the object (optional)
- **setLockIn(uri)** to set the Lock-in tag to 'yes' and the GoodbyeLockInURI (optional)
 - uri string, GoodByeLockInURI
- **setAllowAnswer()** to set the allowAnswer tag to 'yes' (optional)
- **setAllowDrop()** to set the allowDrop tag to 'yes' (optional)
- **setAllowXfer()** to set the allowXfer tag to 'yes' (optional)
- **setAllowConf()** to set the allowConf tag to 'yes' (optional)
- **setTimeout(timeout)** to define a specific timeout for the XML object (optional)
 - timeout integer (seconds)
- **addSoftkey(index,label,uri,icon_index)** to add custom softkeys to the object (optional)
 - index integer, softkey number

- label string
 - uri string
 - icon_index integer, icon number
- setRefresh(timeout,URL) to add Refresh parameters to the object (optional)
 - timeout integer (seconds)
 - URL string
- setEncodingUTF8() to change encoding from default ISO-8859-1 to UTF-8 (optional)
- addIcon(index,icon) to add custom icons to the object (optional)
 - index integer, icon index
 - icon string, icon name or definition
- generate() to return the generated XML for the object
- output(flush) to display the object
 - flush boolean optional, output buffer to be flushed out or not.
- setImage(image) to define the image to be displayed
 - image string
- setGDIImage(GDIImage) to use a GDIImage for display, the size is forced to 40x144
 - GDIImage GDIImage
- setAlignment(vertical,horizontal) to define image alignment
 - vertical string, "top", "middle", "bottom"
 - horizontal string, "left", "middle", "right"
- setSize(height,width) to define image size
 - height integer (pixels)
 - width integer (pixels)
- setURIBase(uriBase) to define the base URI for the selections
 - uriBase string
- addURI(key,uri) to add a selection key with its URI
 - key string (1-9, * and #)
 - uri string
- setMode(mode) to define the image mode to be displayed (normal,extended,fullscreen) (optional, 6739i only)
 - mode string enum normal,extended,fullscreen
- setDoneAction(uri) to set the URI to be called when the user selects the default "Done" key (optional)
 - uri string
- setImageAction(uri) to set the imageAction parameter with the URI to be called when user presses on the displayed image (optional, 6739i only)
 - uri string

Example

Output



13.6 AASTRAIPPHONEIMAGESCREEN()

This class allows you to create a XML ImageScreen object.

Include

- AastralIPPhoneImageScreen.class.php

Methods

- `setTopTitle(title,color,icon_index)` to set the Top Title of the XML screen (6739i only)
 - `title` string
 - `color` string, "red", "blue", ... (optional)
 - `icon_index` integer, icon number
- `setCancelAction(uri)` to set the cancel parameter with the URI to be called on Cancel (optional)
 - `uri` string
- `setDestroyOnExit()` to set DestroyonExit parameter to 'yes', 'no' by default (optional)
- `setBeep()` to enable a notification beep with the object (optional)
- `setLockIn(uri)` to set the Lock-in tag to 'yes' and the GoodbyeLockInURI (optional)
 - `uri` string, GoodByeLockInURI
- `setAllowAnswer()` to set the allowAnswer tag to 'yes' (optional)
- `setAllowDrop()` to set the allowDrop tag to 'yes' (optional)
- `setAllowXfer()` to set the allowXfer tag to 'yes' (optional)
- `setAllowConf()` to set the allowConf tag to 'yes' (optional)
- `setTimeout(timeout)` to define a specific timeout for the XML object (optional)
 - `timeout` integer (seconds)
- `addSoftkey(index,label,uri,icon_index)` to add custom softkeys to the object (optional)
 - `index` integer, softkey number
 - `label` string
 - `uri` string
 - `icon_index` integer, icon number
- `setRefresh(timeout,URL)` to add Refresh parameters to the object (optional)
 - `timeout` integer (seconds)
 - `URL` string
- `setEncodingUTF8()` to change encoding from default ISO-8859-1 to UTF-8 (optional)
- `addIcon(index,icon)` to add custom icons to the object (optional)
 - `index` integer, icon index
 - `icon` string, icon name or definition
- `generate()` to return the generated XML for the object
- `output(flush)` to display the object
 - `flush` boolean optional, output buffer to be flushed out or not.
- `setImage(image)` to define the image to be displayed
 - `image` string
- `setGDIImage(GDIImage)` to use a GDIImage for display, the size is forced to 40x144
 - `GDIImage` GDIImage
- `setAlignment(vertical,vertical)` to define image alignment
 - `vertical` string, "top", "middle", "bottom"
 - `horizontal` string, "left", "middle", "right"
- `setSize(height,width)` to define image size

- height integer (pixels)
 - width integer (pixels)
- setAllowDTMF() to allow DTMF passthrough on the object
- setScrollUp(uri) to set the URI to be called when the user presses the Up arrow (optional)
 - uri string
- setScrollDown(uri) to set the URI to be called when the user presses the Down arrow (optional)
 - uri string
- setScrollLeft(uri) to set the URI to be called when the user presses the Left arrow (optional)
 - uri string
- setScrollRight(uri) to set the URI to be called when the user presses the Right arrow (optional)
 - uri string
- setMode(mode) to define the image mode to be displayed (normal,extended,fullscreen) (optional, 6739i only)
 - mode string enum normal,extended,fullscreen
- setDoneAction(uri) to set the URI to be called when the user selects the default "Done" key (optional)
 - uri string
- setImageAction(uri) to set the imageAction parameter with the URI to be called when user presses on the displayed image (optional, 6739i only)
 - uri string

Example

```

require_once('AastralIPPhoneImageScreen.class.php');
$images = new AastralIPPhoneImageScreen();
$images->setDestroyOnExit();
$images->setSize(40,40);
$images-
>setImage('fffffffffc02fffffff0e4ffffbfff05ffffe7ff7a7fffffffffeffffbd7fffffea6bcf
ffffe796f3feff6fa289f0a86f4866fa20df42414595dd0134f8037ed1637f0e2522b2dd003b6eb
936f05ffffbd4f4107bba6eb0080e93715000010b754001281271408c640252081b1b22500013c5c
66201368004e04467520dc11067152b82094d418e10024720580549478010500260153002093140
0020ac5c91088b0f2b08c21c07d0c2006009fdfe81f80efe0107fe0fb1c3ffff8ffc3ffffef8f7fe
bffbfccf87ffbf64');
$images->addSoftkey('1',
'http://myserver.com/script.php?action=1','1',
'Mail',
$images->addSoftkey('6', 'Exit', 'SoftKey:Exit');
$images->addIcon('1', 'Icon:Envelope');
$images->output();

```

Output



13.7 AASTRAIPPHONEINPUTSCREEN() – SINGLE INPUT FIELD

This class allows you to create a XML InputScreen object.

Include

- AastralPPhoneInputScreen.class.php

Methods

- setTitle(title) to setup the title of an object (optional)
 - title string
- setTopTitle(title,color,icon_index) to set the Top Title of the XML screen (6739i only)
 - title string
 - color string, "red", "blue", ... (optional)
 - icon_index integer, icon number
- setCancelAction(uri) to set the cancel parameter with the URI to be called on Cancel (optional)
 - uri string
- setDestroyOnExit() to set DestroyonExit parameter to 'yes', 'no' by default (optional)
- setLockIn(uri) to set the Lock-in tag to 'yes' and the GoodbyeLockInURI (optional)
 - uri string, GoodByeLockInURI
- setAllowAnswer() to set the allowAnswer tag to 'yes' (optional)
- setAllowDrop() to set the allowDrop tag to 'yes' (optional)
- setAllowXfer() to set the allowXfer tag to 'yes' (optional)
- setAllowConf() to set the allowConf tag to 'yes' (optional)
- setTimeout(timeout) to define a specific timeout for the XML object (optional)
 - timeout integer (seconds)
- addSoftkey(index,label,uri) to add custom softkeys to the object (optional)
 - index integer, softkey number
 - label string
 - uri string

- `setRefresh(timeout,URL)` to add Refresh parameters to the object (optional)
 - `timeout` integer (seconds)
 - `URL` string
- `setEncodingUTF8()` to change encoding from default ISO-8859-1 to UTF-8 (optional)
- `generate()` to return the generated XML for the object
- `output(flush)` to display the object
 - `flush` boolean optional, output buffer to be flushed out or not.
- `setURL(url)` to set the URL to called after the input
 - `url` string
- `setType(type)` to set type of input, 'string' by default
 - `type` enum ('IP', 'string', 'stringN', 'number', 'dateUS'...)
- `setDefault(default)` to set default value for the input (optional)
 - `default` string
- `setParameter(param)` to set the parameter name to be parsed after the input
 - `param` string
- `setInputLanguage(language)` to set the language of the input (optional)
 - `language` enum ("English", "French"....)
- `setPassword()` to set the Password parameter to 'yes', 'no' by default (optional)
- `setNotEditable()` to set the editable parameter to 'no', 'yes' by default (optional)
- `setEditable()` is now replaced by `setNotEditable` but kept for compatibility reasons (optional)
- `setPrompt(prompt)` to set the prompt to be displayed for the input.
 - `prompt` string

Example

```

require_once('AastralIPPhoneInputScreen.class.php');
$input = new AastralIPPhoneInputScreen();
$input->setTitle('Title');
$input->setPrompt('Enter your password');
$input->setParameter('param');
$input->setType('string');
$input->setURL('http://myserver.com/script.php');
$input->setPassword();
$input->setDestroyOnExit();
$input->setDefault('Default');
$input->output();

```

Output



[13.8 AASTRAIPPHONEINPUTSCREEN\(\) – MULTIPLE INPUT FIELDS](#)

This class allows you to create a XML InputScreen object with multiple input fields.

Include

- AastralPPhoneInputScreen.class.php

Methods

- setTitle(title) to setup the title of an object (optional)
 - title string
- setTopTitle(title,color,icon_index) to set the Top Title of the XML screen (6739i only)
 - title string
 - color string, "red", "blue", ... (optional)
 - icon_index integer, icon number
- setCancelAction(uri) to set the cancel parameter with the URI to be called on Cancel (optional)
 - uri string
- setDestroyOnExit() to set DestroyonExit parameter to 'yes', 'no' by default (optional)
- setLockIn(uri) to set the Lock-in tag to 'yes' and the GoodbyeLockInURI (optional)
 - uri string, GoodByeLockInURI
- setAllowAnswer() to set the allowAnswer tag to 'yes' (optional)
- setAllowDrop() to set the allowDrop tag to 'yes' (optional)
- setAllowXfer() to set the allowXfer tag to 'yes' (optional)
- setAllowConf() to set the allowConf tag to 'yes' (optional)
- setTimeout(timeout) to define a specific timeout for the XML object (optional)
 - timeout integer (seconds)
- addSoftkey(index,label,uri) to add custom softkeys to the object (optional)

- index integer, softkey number
 - label string
 - uri string
- setRefresh(timeout,URL) to add Refresh parameters to the object (optional)
 - timeout integer (seconds)
 - URL string
- setEncodingUTF8() to change encoding from default ISO-8859-1 to UTF-8 (optional)
- generate() to return the generated XML for the object
- output(flush) to display the object
 - flush boolean optional, output buffer to be flushed out or not.
- setURL(url) to set the URL to called after the input
 - url string
- setType(type) to set the default type of input 'string' by default
 - type enum ('IP', 'string', 'number', 'dateUS'...)
- setDefault(default) to set default default value for the input (optional)
 - default string
- setParameter(param) to set the default parameter name to be parsed after the input
 - param string
- setPassword() to set the default Password parameter to 'yes', 'no' by default (optional)
- setNotEditable() to set the default editable parameter to 'no', 'yes' by default (optional)
- setEditable() is now replaced by setNotEditable but kept for compatibility reasons (optional)
- setPrompt(prompt) to set the default prompt to be displayed for the input.
 - prompt string
- setDefaultIndex(index) to define the field index the object will use to start (optional)
 - index integer, optional, default is 1
- setDisplayMode(display) to define the aspect of the display, normal/condensed (optional)
 - display enum ("normal", "condensed"), default is "normal".
- setInputLanguage(language) to set the language of the input (optional)
 - language enum ("English", "French"....)
- addField(type) to add an input field and setting its type
 - type (IP, string, stringN, number, dateUS, timeUS,dateInt, timeInt or empty) if the type is an empty string then the type is inherited from the main object.
- setFieldPassword(password) to set the password mode for the input field, overrides the value set by setPassword for the field
 - password enum ("yes", "no")
- setFieldEditable(editable) to set the input field editable mode ('yes', 'no'), overrides the value set by setEditable or setNotEditable for the field
 - editable enum ("yes", "no")
- setFieldParameter(parameter) to set the parameter name to be parsed after the global input, overrides the value set by setParameter for the field


- parameter string
- setFieldPrompt(prompt) to set the prompt to be displayed for the input field, overrides the value set by setPrompt for the field
 - prompt string
- setFieldSelection(selection) to set the Selection tag for the field
 - selectionstring
- setFieldDefault(default) to set default value for the input field, overrides the value set by setDefault for the field
 - default string

Example

```
require_once('AastraIPPhoneInputScreen.class.php');
$input = new AastraIPPhoneInputScreen();
$input->setTitle('Restricted application');
$input->setDisplayMode('condensed');
$input->setURL($XML_SERVER);
$input->setDestroyOnExit();
$input->addField('empty');
$input->addField('string');
$input->setFieldSelection('1');
$input->setFieldPrompt('Username:');
$input->setFieldParameter('user');


```

Output

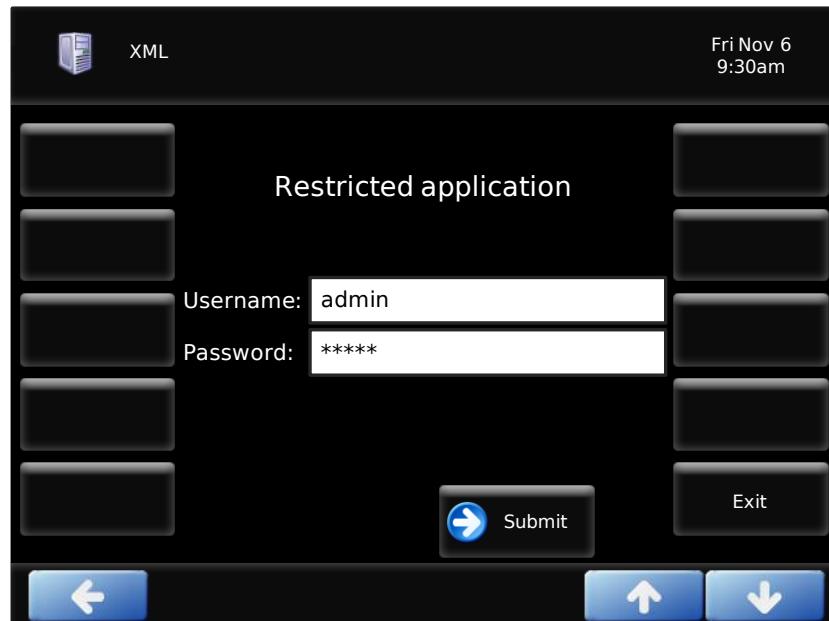

13.9 AASTRAIPPHONESTATUS()

This class allows you to create a XML PhoneStatus object.

Include

- AastralIPPhoneStatus.class.php


Methods

- setEncodingUTF8() to change encoding from default ISO-8859-1 to UTF-8 (optional)
- generate() to return the generated XML for the object
- output(flush) to display the object
 - flush boolean optional, output buffer to be flushed out or not.
- setSession(session) to setup the session ID
 - session string
- setTriggerDestroyOnExit() to set the triggerDestroyOnExit tag to "yes" (optional)
- addEntry(index,message,type,timeout,uri,icon) to add a message to be displayed on the idle screen.
 - index integer
 - message string
 - type enum ("alert") optional
 - timeout integer (seconds) optional
 - uri string (6739i only, optional)
 - icon integer (6867i, 6869i and 6739i only, optional)

Example

```
require_once('AastralIPPhoneStatus.class.php');
$status = new AastralIPPhoneStatus();
$status->setSession('Session');
$status->addEntry('1','Message 1');
$status->addEntry('2','Alert Message','alert',5);
$status->output();
```

Output

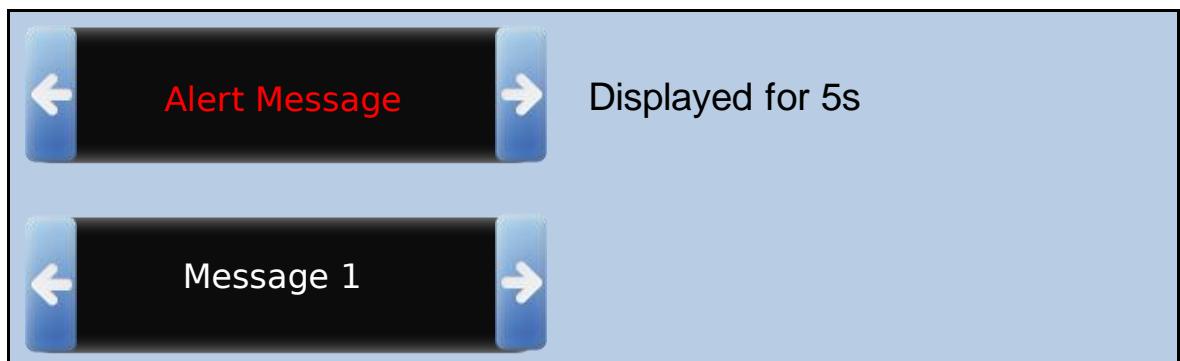

13.10 AASTRAIPPHONETEXTMENU()

This class allows you to create a XML TextMenu object.

Include

- AastralIPPhoneTextMenu.class.php

Methods

- setTitle(title) to setup the title of an object (optional)
 - title string


- `setCancelAction(uri)` to set the cancel parameter with the URI to be called on Cancel (optional)
 - `uri` string
- `setDestroyOnExit()` to set `DestroyonExit` parameter to 'yes', 'no' by default (optional)
- `setBeep()` to enable a notification beep with the object (optional)
- `setLockIn(uri)` to set the Lock-in tag to 'yes' and the `GoodbyeLockInURI` (optional)
 - `uri` string, `GoodByeLockInURI`
- `setAllowAnswer()` to set the `allowAnswer` tag to 'yes' (optional)
- `setAllowDrop()` to set the `allowDrop` tag to 'yes' (optional)
- `setAllowXfer()` to set the `allowXfer` tag to 'yes' (optional)
- `setAllowConf()` to set the `allowConf` tag to 'yes' (optional)
- `setTimeout(timeout)` to define a specific timeout for the XML object (optional)
 - `timeout` integer (seconds)
- `addSoftkey(index,label,uri)` to add custom softkeys to the object (optional)
 - `index` integer, softkey number
 - `label` string
 - `uri` string
- `setRefresh(timeout,URL)` to add Refresh parameters to the object (optional)
 - `timeout` integer (seconds)
 - `URL` string
- `setEncodingUTF8()` to change encoding from default ISO-8859-1 to UTF-8 (optional)
- `generate()` to return the generated XML for the object
- `output(flush)` to display the object
 - `flush` boolean optional, output buffer to be flushed out or not.
- `setDefaultIndex(index)` to set the default selection in the list (optional)
 - `index` index (1-30)
- `setBase(base)` to configure the menulitem base URI
 - `base` string
- `resetBase()` to reset the menulitem base URI
- `addEntry(name,url,selection,icon,dial)` to add an element in the list to be displayed
 - `name` string or array(0=>Line1,1=>Line2,2=>Offset,3=>Char,4=>Mode)
 - `url` string
 - `selection` string
 - `icon` integer
 - `dial` string, phone number bto dial
- `setScrollUp(uri)` to set the URI to be called when the user presses the Up arrow (optional)
 - `uri` string
- `setScrollDown(uri)` to set the URI to be called when the user presses the Down arrow (optional)
 - `uri` string

- `setUnitScroll()` to set the `unitScroll` tag to yes which changes the scrolling behavior on the 6739i (optional and 6739i only)
- `natsortbyname()` to order the list, must not be used in conjunction with `setBase` or `resetBase`

Example

```
require_once('AastraIPPhoneTextMenu.class.php');
$menu = new AastraIPPhoneTextMenu();
$menu->setTitle('Title');
$menu->setDestroyOnExit();
$menu->setDefaultIndex('3');
$menu->addEntry('Choice 2',      'http://myserver.com/script.php?choice=2',
'Value=2');
$menu->addEntry('Choice 1',      'http://myserver.com/script.php?choice=1',
'Value=1');
$menu->addEntry('Choice 3',      'http://myserver.com/script.php?choice=3',
'Value=3');
$menu->natsortByName();
$menu->addSoftkey('1', 'My Select', 'http://myserver.com/script.php?action=1');
$menu->addSoftkey('10', 'Exit', 'SoftKey:Exit');
$menu->output();
```

Output

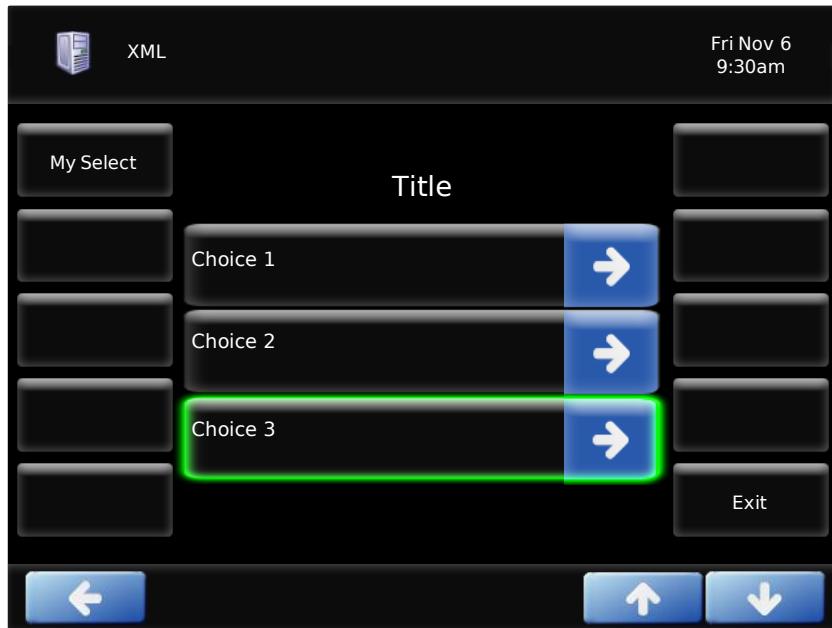

13.11 AASTRAIPPHONETEXTSCREEN()

This class allows you to create a XML TextScreen object.

Include

- `AastralPPhoneTextScreen.class.php`

Methods

- `setTitle(title)` to setup the title of an object (optional)
 - `title` string
- `setTopTitle(title,color,icon_index)` to set the Top Title of the XML screen (6739i only)
 - `title` string

- color string, "red", "blue", ... (optional)
 - icon_index integer, icon number
- setCancelAction(uri) to set the cancel parameter with the URI to be called on Cancel (optional)
 - uri string
- setDestroyOnExit() to set DestroyonExit parameter to 'yes', 'no' by default (optional)
- setBeep() to enable a notification beep with the object (optional)
- setLockIn(uri) to set the Lock-in tag to 'yes' and the GoodbyeLockInURI (optional)
 - uri string, GoodByeLockInURI
- setAllowAnswer() to set the allowAnswer tag to 'yes' (optional)
- setAllowDrop() to set the allowDrop tag to 'yes' (optional)
- setAllowXfer() to set the allowXfer tag to 'yes' (optional)
- setAllowConf() to set the allowConf tag to 'yes' (optional)
- setTimeout(timeout) to define a specific timeout for the XML object (optional)
 - timeout integer (seconds)
- addSoftkey(index,label,uri) to add custom softkeys to the object (optional)
 - index integer, softkey number
 - label string
 - uri string
- setRefresh(timeout,URL) to add Refresh parameters to the object (optional)
 - timeout integer (seconds)
 - URL string
- setEncodingUTF8() to change encoding from default ISO-8859-1 to UTF-8 (optional)
- addIcon(index,icon) to add custom icons to the object (optional)
- generate() to return the generated XML for the object
- output(flush) to display the object
 - flush boolean optional, output buffer to be flushed out or not.
- setText(text) to set the text to be displayed.
 - text string
- setAllowDTMF() to allow DTMF passthrough on the object
- setDial(number,line) to set the number to be dialed as well as the line to use when going off-hook or with the custom softkey Softkey::Dial2
 - number string
 - line integer (optional)

Example

```
require_once('AastralIPPhoneTextScreen.class.php');
$text = new AastralIPPhoneTextScreen();
$text->setTitle('Title');
$text->setText('Text to be displayed and this text can be really long...');
$text->setDestroyOnExit();
$text->addSoftkey('1', 'Mail', 'http://myserver.com/script.php?action=1');
$text->addSoftkey('10', 'Exit', 'SoftKey:Exit');
$text->output();
```

Output



[13.12 AASTRALIPPHONESCROLLABLETEXTMENU\(\)](#)

This class allows you to create TextMenu supporting more than 30 items, all the next/previous page management is handled by the object.

Include

- AastralIPPhoneScrollableTextMenu.class.php

Methods

- setEntries(entries) Set entries of the list by 2 dim array.
 - entries Inner array field names: 'name', 'url', 'selection', 'icon', 'dial'
- verifyCookie(cookie) Verifies if the cookie of the HTTP requests matches the cookie of the saved context.
- setBackURI(URI) Set the cancel parameter with the URI to be called on Cancel or Back Softkey (optional)
- setBackKeyPosition(position) Set position of Back Softkey. Default is 3.
- setNextKeyPosition(position) Set position of Next Softkey. Default is 4.
- setPreviousKeyPosition(position) Set position of Previous Softkey. Default is 5.
- setExitKeyPosition(position) Set position of Back Softkey. Default is 6.
- setSelectKeyPosition(position) Set position of Back Softkey. Default is 1.

- `setNextKeyIcon(icon)` Set icon of Next Softkey. Default is Icon:TailArrowDown. Set NULL to disable icon.
- `setPreviousKeyIcon(icon)` Set icon of Previous Softkey. Default is Icon:TailArrowUp. Set NULL to disable icon.
- `disableExitKey()` Disable the Exit Softkey
- `setSelectKeyLabel(label)` Set the label of the Select Softkey. Default is 'Select'. Make sure the string is in language.ini.
- `setCancelAction(uri)` to set the cancel parameter with the URI to be called on Cancel or Back Softkey (optional)
- `output()` to display the object
- `addEntry(name,url,selection,icon,dial)` to add an element in the list to be displayed
- `natsortbyname()` to order the list
- `setTitle>Title`) to setup the title of an object (optional)
- `setTitleWrap()` to set the title to be wrapped on 2 lines (optional)
- `setTopTitle(title,color,icon_index)` to set the Top Title of the XML screen (6739i only)
 - `title` string
 - `color` string, "red", "blue", ... (optional)
 - `icon_index` integer, icon number
- `setDestroyOnExit()` to set DestroyOnExit parameter to "yes" (optional)
- `setBeep()` to enable a notification beep with the object (optional)
- `setLockIn(uri)` to set the Lock-in tag to 'yes' and the GoodbyeLockInURI (optional)
 - `uri` string, GoodByeLockInURI
- `setAllowAnswer()` to set the allowAnswer tag to 'yes' (optional)
- `setTimeout(timeout)` to define a specific timeout for the XML object (optional)
- `addSoftkey(index,label,uri,icon_index)` to add custom softkeys to the object (optional)
- `setRefresh(timeout,URL)` to add Refresh parameters to the object (optional)
- `generate()` to return the object content
- `setDefaultIndex(index)` to set the default selection in the list (optional)
- `setStyle(style)` to set the style of the list numbered/none/radio (optional)
- `setWrapList()` to allow 2 lines items (optional)

Examples

```
require_once('AastraIPPhoneScrollableTextMenu.class.php')
$menu = new AastraIPPhoneScrollableTextMenu();
$menu->setTitle('My Menu');
$menu->addEntry('Choice 1', $XML_SERVER."?choice=1", '1');
# ... add as many entries you want
$menu->addEntry('Choice 100', $XML_SERVER."?choice=100", '100');
$menu->output();
```

And

```

require_once('AastralIPPhoneScrollableTextMenu.class.php')
$entries[0]['name'] = "Choice 1";
$entries[0]['url'] = $XML_SERVER."?choice=1";
$entries[0]['selection'] = "1";
# ... add as many entries you want
$entries[99]['name'] = "Choice 100";
$entries[99]['url'] = $XML_SERVER."?choice=100";
$entries[99]['selection'] = "100";
$menu = new AastralIPPhoneScrollableTextMenu();
$menu->setTitle('My Menu');
$menu->setEntries($entries);
$menu->output();

```

13.13 AASTRALIPPHONESCROLLABLEDIRECTORY()

This class allows you to create a complete directory application by just providing the results of a directory query as an array.

Include

- AastralIPPhoneScrollableDirectory.class.php

Methods

- setDialKeyPosition(position)setNameDisplayFormat(format) Set position of Dial Softkey in list view. Default is 2.
- setNameDisplayFormat(format) Set name display format. 0="Firstname Lastname", 1="Lastname, Firstname"
- natsortByLastname() Sort by lastname (same as natsortByName in case firstname is not provided)
- natsortByFirstname() Sort by firstname (same as natsortByName in case firstname is not provided)

Overwritten methods from AastralIPPhoneScrollableTextMenu

- setEntries(records) Set directory entries by 2 dim array. Inner array fields: See addEntry(record)
- addEntry(record) Add directory entry

Array fields: (name is mandatory, rest optional)

- name: Lastname or name
- firstname: Firstname (optional)
- title: Title
- department: Department
- company: Company
- icon: Icon
- office: Office number display format
- officeDigits: Office number digits / extension to be dialed. Optional
- mobile: Cell number display format
- mobileDigits: Cell number digits / extension to be dialed. Optional
- home: Home number display format
- homeDigits: Home number digits / extension to be dialed. Optional
- office2: Alternative / 2nd office number display format
- office2Digits: 2nd office number digits / extension to be dialed. Optional

- speedURL: If this field is present, a "+Speed" Softkey will be shown in zoom mode. Selected number will be passed in \$selection variable.

Example: speedURL=http://xmlserver/xml/speed/speed.php?action=add&name=Peter

Inherited from AastraIPPhoneScrollableTextMenu

- setTopTitle(title,color,icon_index) to set the Top Title of the XML screen (6739i only)
 - title string
 - color string, "red", "blue", ... (optional)
 - icon_index integer, icon number
- setEntries(entries) Set entries of the list by an 2 dim array. Inner array field names: 'name', 'url', 'selection', 'icon', 'dial'
- verifyCookie(cookie) Verifies if the cookie of the HTTP requests matches the cookie of the saved context.
- setBackURI(URI) Set the cancel parameter with the URI to be called on Cancel or Back Softkey (optional)
- setBackKeyPosition(position) Set position of Back Softkey. Default is 3.
- setNextKeyPosition(position) Set position of Back Softkey. Default is 4.
- setPreviousKeyPosition(position) Set position of Back Softkey. Default is 5.
- setExitKeyPosition(position) Set position of Back Softkey. Default is 6.
- setSelectKeyPosition(position) Set position of Back Softkey. Default is 1.
- setNextKeyIcon(icon) Set icon of Next Softkey. Default is Icon:TailArrowDown. Set NULL to disable icon.
- setPreviousKeyIcon(icon) Set icon of Previous Softkey. Default is Icon:TailArrowUp. Set NULL to disable icon.
- disableExitKey() Disable the Exit Softkey
- setSelectKeyLabel(label) Set the label of the Select Softkey. Default is 'Select'. Make sure the string is in language.ini.
- setCancelAction(uri) to set the cancel parameter with the URI to be called on Cancel or Back Softkey (optional)
- addIcon(index,icon) to add custom icons to the object (optional)
- output() to display the object
- addEntry(name,url,selection,icon,dial) to add an element in the list to be displayed
- natsortbyname() to order the list

Examples

```

require_once('AastraIPPhoneScrollableDirectory.class.php')
$records[0]['name'] = "Smith";
$records[0]['firstname'] = "Lisa";
$records[0]['office'] = "+1 (0) 555-123-4321";
$records[0]['officeDigits'] = "4321";
$records[0]['mobile'] = "079 555 12 34";
# ... add as many entries you want
$records[99]['name'] = "Miller";
$records[99]['firstname'] = "Bob";
$records[99]['office'] = "+1 (0) 555-123-1234";
$records[99]['officeDigits'] = "1234";
$records[99]['home'] = "044 555 22 33";
$records[99]['company'] = "Mitel";
$directory = new AastraIPPhoneScrollableDirectory();
$directory->setTitle('Directory');
$directory->setBackURI($XML_SERVER."?action=start");

```

```
$directory->setEntries($records);  
$directory->output();
```

13.14 EXAMPLES PROVIDED WITH THE PHP API

With the PHP API, Mitel provides some source code on how to use it.

sample.php for the regular XML objects

The whole directory “php_classes” must be installed on a HTTP server anywhere behind the root directory

sample.php

On any type of phone, create a XML softkey/prgkey to call the sample.php script using the following uri:

<http://myserver.com/mydirectory/sample.php>

It includes examples for

- PhoneConfiguration
- PhoneExecute
- PhoneInputScreen (3)
- PhoneTextMenu (2)
- PhoneTextScreen
- PhoneFormattedTextScreen
- PhoneStatus (2)

14 APPENDIX C: DYNAMIC PARAMETERS

The following table lists the configuration parameters that can be modified by a PhoneConfiguration object without a reboot of the SIP phone.

Parameter	Comments
ALL action uri	
ALL SIP parameters	
admin password	
alternate tftp server	
audio mode	
auto offhook	
auto resync days	
auto resync max delay	
auto resync mode	
auto resync time	
background image	
call forward key mode	
call transfer disabled	
callers list disabled	This parameter is dynamic so a user can't access it or add to it. However, you need to reboot the phone to clear the list.
conf script	
conference disabled	
date format	
directed call pickup	
directory 1	You need to reboot the phone to download new directories.
directory 2	
directory disabled	This parameter is dynamic so a user can't access it or add to it. However, you need to reboot the phone to clear the list.

Parameter	Comments
directory script	
dnd key mode	
download protocol	
dst config	
dst end day	
dst end hour	
dst end month	
dst end relative date	
dst end week	
dst minutes	
dst start day	
dst start hour	
dst start month	
dst start relative date	
dst start week	
feature key selection list	
ftp password	
ftp server	
ftp username	
handset sidetone gain	
handset tx gain	
handsfree tx gain	
headset sidetone gain	
headset tx gain	
http path	
http server	
https validate certificates	

Parameter	Comments
https validate expires	
https validate hostname	
icom script	
inactivity brightness level	
language	
line1 ring tone	
line2 ring tone	
line3 ring tone	
line4 ring tone	
line5 ring tone	
line6 ring tone	
line7 ring tone	
line8 ring tone	
line9 ring tone	
live dialpad	
log module llcp	
map conf key to	
map redial key to	
mwi missed calls	
options password enabled	
options script	
play a ring splash	
preferred line	
preferred line timeout	
prgkeyN line	Changes to subscriptions (eg BLF or BLA) require a reboot.
prgkeyN name	
prgkeyN type	

Parameter	Comments
prgkeyN value	
redial disabled	This parameter is dynamic so a user can't access it or add to it. However, you need to reboot the phone to clear the list.
redial script	
ring tone	
ringback timeout	
softkeyN label	
softkeyN line	
softkeyN states	Changes to subscriptions (eg BLF or BLA) require a reboot.
softkeyN type	
softkeyN value	
softkey selection list	
speeedial edit	
suppress dtmf playback	
switch ui focus to ringing line	
tftp server	
time format	
time reserved	
time server disabled	
time server1	
time server2	
time server3	
time zone code	
time zone minutes	
time zone name	
tone set	

Parameter	Comments
use alternate tftp server	
user password	
voicemail script	
xfer script	
xml application title	
xml application URI	
xml beep notification	

15 APPENDIX D: LOCALIZED INPUT CHARACTER SET

15.1 ENGLISH

Key	Upper case	Lower case
1	1.:;=_,-'&()	1.:;=_,-'&()
2	ABC2	abc2
3	DEF3	def3
4	GHI4	ghi4
5	JKL5	jkl5
6	MNO6	mno6
7	PQRS7	pqrs7
8	TUV8	tuv8
9	WXYZ9	wxyz9
0	0+	0+
*	* <SPACE>	* <SPACE>
#	#/\@	#/\@

15.2 FRENCH/FRANÇAIS

Key	Upper case	Lower case
1	1.:;=_,-'&()	1.:;=_,-'&()
2	ABC2ÂÂÇÂÂÆ	abc2àâçáâæ
3	DEF3ÉÈÊË	def3éèêë
4	GHI4ÏÏ	ghi4ïï
5	JKL5	jkl5
6	MNO6ÑÓÒÔÖ	mno6ñóòôö
7	PQRS7	pqrs7
8	TUV8ÚÙÛÜ	tuv8úùûü
9	WXYZ9	wxyz9
0	0+	0+
*	* <SPACE>	* <SPACE>
#	#/\@	#/\@

15.3 SPANISH/ESPAÑOL

Key	Upper case	Lower case
1	1.:;=_,-'&()	1.:;=_,-'&()
2	ABC2ÂÇ	abc2àç
3	DEF3ÉÈ	def3éè
4	GHI4ÏÍ	Ghi4ïí
5	JKL5	Jkl5
6	MNO6ÑÓÒ	mno6ñóò

Key	Upper case	Lower case
7	PQRS7	pqrs7
8	TUV8ÜÜ	tuv8üü
9	WXYZ9	wxyz9
0	0+	0+
*	* <SPACE>	* <SPACE>
#	#{@}	#{@}

15.4 GERMAN/DEUTSCH

Key	Upper case	Lower case
1	1.:;=_,-'&()	1.:;=_,-'&()
2	ABC2ÄÀ	abc2ääà
3	DEF3É	def3é
4	GHI4	ghi4
5	JKL5	jkl5
6	MNO6Ö	mno6ö
7	PQRS7ß	pqrs7ß
8	TUV8Ü	tuv8ü
9	WXYZ9	wxyz9
0	0+	0+
*	* <SPACE>	* <SPACE>
#	#{@}	#{@}

15.5 ITALIAN/ITALIANO

Key	Upper case	Lower case
1	1.:;=_,-'&()	1.:;=_,-'&()
2	ABC2ÀCÇ	abc2àccç
3	DEF3ÉÈË	def3éèë
4	GHI4	ghi4
5	JKL5	jkl5
6	MNO6ÓÒ	mno6óò
7	PQRS7	pqrs7
8	TUV8Ù	tuv8ù
9	WXYZ9	wxyz9
0	0+	0+
*	* <SPACE>	* <SPACE>
#	#{@}	#{@}

15.6 PORTUGUESE/PORTUGÊS

Key	Upper case	Lower case
1	1.:;=_,-'&()	1.:;=_,-'&()
2	ABC2ÀÂÃÇ	abc2àâãç
3	DEF3ÉÊ	def3éê
4	GHI4Í	ghi4í
5	JKL5	jkl5
6	MNO6ÓÔÕ	mno6óôõ
7	PQRS7	pqrs7
8	TUV8ÚÜ	tuv8úü
9	WXYZ9	wxyz9
0	0+	0+
*	* <SPACE>	* <SPACE>
#	#^@	#^@

16 APPENDIX E: XML SELF-CONFIGURATION

Mitel provides here a possible implementation for the self-configuration, this is just an example source code not supported by Mitel.

In this implementation targeted for Trixbox CE using FreePBX, the chosen policy is to have all the extensions pre-configured in the Asterisk database and use

- the extension
- the voice mail password

for the credentials to authenticate the user and link the MAC address of the phone to an extension.

The script checks the credentials but also uses a log file to trace the extensions that are already used (startup.cfg).

On top of the XML self-configuration we also provide here a “hot desking” capability using the “logout.php”, the user can logout his extension of his current phone and login somewhere else.

For instance the logout key can be configured as a softkey

```
softkey1 type: xml
softkey1 label: logout
softkey1 value:
http://192.168.0.110/startup/logout.php?extension=$$SIPUSERNAME$$
softkey1 states: idle
```

Notes:

- TFTP server root directory is located at '/tftpboot'
 - • Asterisk directory is located at '/etc/asterisk'
 - XML script and all the related files are located at the root directory of the HTTP server (typically /var/www/html) under the directory "startup".
 - The "startup" directory must have read/write for the HTTP server user.
-

astra.cfg (typically located at /tftpboot)

→ **Note:** In this example, the Trixbox CE server is located at 192.168.0.110 and is also the TFTP server.

```
# Setup DHCP mode
dhcp: 1

# Setup TFTP server address
tftp server: 192.168.0.110

# Time server
time server disabled: 0
time server1: pool.ntp.org
time server2: 192.168.0.110

# Startup URI
action uri startup: http://192.168.0.110/startup/startup.php
```

gen-astra script shell to generate the astra.cfg file

```

#!/bin/sh
# To put on /usr/local/sbin
echo ""
echo -----
echo "Creating a default config file for Mitel phones"
echo -----
echo ""
echo "Creating /tftpboot/astra.cfg..."
echo ""

IFCONFIG=`which ifconfig 2>/dev/null|echo /sbin/ifconfig`
IPADDR=`$IFCONFIG eth0|gawk '/inet addr/{print $2}'|gawk -F: '{print $2}'` 

cat > /tftpboot/astra.cfg <<EOF
# Setup DHCP mode
dhcp: 1

# Setup TFTP server address
tftp server: $IPADDR

# Time server
time server disabled: 0
time server1: pool.ntp.org
time server2: $IPADDR

# Startup URI
action uri startup: http://$IPADDR/xml/startup/startup.php

EOF

chmod 666 /tftpboot/astra.cfg

echo "Created /tftpboot/astra.cfg using $IPADDR for the proxy. If the"
echo "IP address of your Asterisk system changes run this script again and"
echo "reboot."
echo "Reboot your Mitel phones by disconnecting the power to the phone."
echo ""

```

Template files for the phones (typically located at /var/www/html/startup)

The following file is a template used to create the MAC.cfg file, there must be one file for each Mitel phone.

- Aastra53i.cfg for the 53i
- Aastra55i.cfg for the 55i
- Aastra57i.cfg for the 57i
- Aastra57iCT.cfg for the 57iCT
- Aastra6730i.cfg for the 6730i
- Aastra6731i.cfg for the 6731i
- Aastra6735i.cfg for the 6735i
- Aastra6737i.cfg for the 6737i
- Aastra6739i.cfg for the 6739i
- Aastra9143i.cfg for the 9143i
- Aastra9480i.cfg for the 9480i
- Aastra9480iCT.cfg for the 9480iCT

In these template files, you can use variables that will be replaced with the corresponding value by the script.

- **\$\$AA_SIPAUTHNAME_AA\$\$** for the user SIP authentication name
- **\$\$AA_SIPSECRET_AA\$\$** for the user SIP secret
- **\$\$AA_SIPUSERNAME_AA\$\$** for the user SIP username
- **\$\$AA_SIPCALLERID_AA\$\$** for the user SIP caller-id
- **\$\$AA_PROXY_SERVER_AA\$\$** for the name/IP address of the proxy server
- **\$\$AA_REGISTRAR_SERVER_AA\$\$** for the name/IP address of the registrar server

The template files can of course be completed with extra parameters (timezone, softkeys ...).

```
# SIP Lines
sip line1 auth name: $$AA_SIPAUTHNAME_AA$$
sip line1 password: $$AA_SIPSECRET_AA$$
sip line1 user name: $$AA_SIPUSERNAME_AA$$
sip line1 display name: $$AA_SIPCALLERID_AA$$
sip line1 screen name: $$AA_SIPCALLERID_AA$$
sip line1 proxy ip: $$AA_PROXY_SERVER_AA$$
sip line1 proxy port: 5060
sip line1 registrar ip: $$AA_REGISTRAR_SERVER_AA$$
sip line1 registrar port: 5060
sip line1 vmail: *98
sip line1 mode: 0

# Action URI
action uri startup:
```

startup.php (located at /var/www/html/startup)

```

<?php
#####
# Sample script for self-configuration with Trixbox CE/Asterisk
# Mitel SIP Phones R2.3.0 or better
#
# php source code
# Provided by Mitel 2008
#
# Phone supported
#     Mitel 5i series
#####

#####
# Includes
#####
require_once('include/config.inc.php');
require_once('include/backend.inc.php');
require_once('phpagi/misc.php');
require_once('phpagi/phpagi-asmanager.php');

#####
# Private functions
#####

#####
# Aastra_decode_HTTP_header()
#
# Returns an array
#   0 Phone Type
#   1 Phone MAC Address
#   2 Phone firmware version
#####
function Aastra_decode_HTTP_header()
{
$user_agent=$_SERVER["HTTP_USER_AGENT"];
if(stristr($user_agent,"Aastra"))
{
$value=ereg_split("/ MAC:/",$user_agent);
$fin=ereg_split("/ /",$value[1]);
$value[1]=ereg_replace("/\-/","", $fin[0]);
$value[2]=ereg_replace("/V:/","", $fin[1]);
}
else
{
$value[0]="MSIE";
$value[1]="NA";
$value[2]="NA";
}

$value[3]=$_SERVER["REMOTE_ADDR"];

return($value);
}

#####
# lookup_config_file(extension)
# Checks if extension is already in use.
#
# Parameters
#     extension      extension to check
#
# Returns 1 if extension already in use
#####

```

```

function lookup_config_file($extension)
{
$config="startup.cfg";

# Init return
$return=0;

# Read config file
$array = @parse_ini_file($config, true);

# Test MAC address
if($array[$extension] ['mac']!="") $return=1;

return($return);
}

#####
# update_config_file(extension,mac,ip,model)
# Update the config file with the new extension parameters
#
# Parameters
#   extension      user extension
#   mac            MAC address of the phone
#   ip             IP address of the phone
#   model          Phone model
#####

function update_config_file($extension,$mac,$ip,$model)
{
$config="startup.cfg";

# Read config file
$array = @parse_ini_file($config, true);
if($array==NULL) $array=array();

# Update value
$array[$extension] ['mac']=$mac;
$array[$extension] ['ip']=$ip;
$array[$extension] ['model']=$model;

# Update config file
reset($array);
$handle = @fopen($config, "w");
if($handle)
{
    while ($v = current($array))
    {
        fputs($handle,"[".key($array)."]"."`"\n");
        fputs($handle,"mac=". $v['mac']."`\n");
        fputs($handle,"ip=". $v['ip']."`\n");
        fputs($handle,"model=". $v['model']."`\n\n");
        next($array);
    }
    fclose($handle);
}
}

#####
# create_mac(extension,mac,username,secret,callerid,model)
# Creates the MAC.cfg file for the user.
#
# Parameters
#   extension      user extension
#   mac            MAC address of the phone

```

```

#      username      SIP authname
#      secret       SIP secret
#      callerid     User CallerID
#      model        Phone model
#
#####
#####function create_mac($mac,$extension,$username,$secret,$callerid,$model)
{
Global $AA_PROXY_SERVER,$AA_REGISTRAR_SERVER;

$value=ereg_split("/ /",$callerid);
$result=$value[0]." ".$value[1];
$result=ereg_replace("/<","(",",$result);
$result=ereg_replace("/>",")",$result);

# Prepare replace strings
$search=array('/\$\$AA_SIPAUTHNAME_AA\$\\$/','/\$\$AA_SIPSECRET_AA\$\\$/','/\$\$AA_SIPUSERNAME_AA\$\\$/','/\$\$AA_SIPCALLERID_AA\$\\$/','/\$\$AA_PROXY_SERVER_AA\$\\$/','/\$\$AA_REGISTRAR_SERVER_AA\$\\$/');
$replace=array($username,$secret,$extension,$result,$AA_PROXY_SERVER,$AA_REGISTRAR_SERVER);

$read = @fopen($model.".cfg", "r");
if($read)
{
    $write = @fopen("/tftpboot/".$mac.".cfg", "w");
    if($write)
    {
        # Create file header
        while($line=fgets($read,200))
        {
            $line = ereg_replace($search, $replace, $line);
            fputs($write,$line);
        }
        fputs($write,"\n");
        fclose($write);
    }
    fclose($read);
}
}

#####
# get_callerid(user)
#
# This function retrieves the user callerID of a user in the Asterisk
# registry (FreePBX 2.3)
#
# Parameters
#   @user           user ID
#
# Returns
#   CallerID as a string
#####
function get_callerid($user)
{
Global $ASTERISK_LOCATION;

# Try in the config file first
$sip_array = parse_ini_file($ASTERISK_LOCATION."sip_additional.conf", true);

# Extension exists?
if ($sip_array[$user]==NULL) $callerid="Unknown";
else

```

```

{
# FreePBX ?
if(strstr($sip_array[$user]['callerid'],'device'))
{
    # Connect to AGI
    $as = new AGI_AsteriskManager();
    $res = $as->connect();

    # Get value in the database
    $res = $as->Command('database get AMPUSER '.$user.'\cidname');
    $line=split("\n", $res['data']);
    $cid=split(" ", $line[1]);
    $callerid= $cid[1].' '.$cid[2];

    # Disconnect properly
    $as->disconnect();
}
else
{
    # Retrieve the value
    $value=explode(" <",$sip_array[$user]['callerid'],2);
    $callerid=$value[0];
}
}

# Return Caller ID
return($callerid);
}

#####
# get_username(user)
#
# This function retrieves the username of a user in the Asterisk
# registry (FreePBX 2.3)
#
# Parameters
#   @user           user ID
#
# Returns
#   username as a string
#####
function get_username($user)
{
Global $ASTERISK_LOCATION;

# Get all the user data
$sip_array = @parse_ini_file($ASTERISK_LOCATION."sip_additional.conf", true);

# Collect data
if($sip_array[$user]['username']!='') $username=$sip_array[$user]['username'];
else
{
    # Connect to AGI
    $as = new AGI_AsteriskManager();
    $res = $as->connect();

    # Get value in the database
    $res = $as->Command('database get DEVICE '.$user.'\user');
    $line=split("\n", $res['data']);
    $cid=split(" ", $line[1]);
    $username= $cid[1];

    # Disconnect properly
}
}

```

```

        $as->disconnect();
    }

    # Return answer
    return($username);
}

#####
# get_secret(user)
#
# This function retrieves the SIP password (secret) of a user in the
# Asterisk configuration
#
# Parameters
#   @user           user ID
#
# Returns
#   secret as a string
#####
function get_secret($user)
{
Global $ASTERISK_LOCATION;

# Get all the user data
$sip_array = @parse_ini_file($ASTERISK_LOCATION."sip_additional.conf", true);

# Return answer
return($sip_array[$user]['secret']);
}

#####
# Main code
#####
# GLOBAL VARIABLES
$XML_SERVER = "http://".$_SERVER['SERVER_ADDR'].$_SERVER['SCRIPT_NAME'];
$AA_PROXY_SERVER = $_SERVER['SERVER_ADDR'];
$AA_REGISTRAR_SERVER = $_SERVER['SERVER_ADDR'];
$ASTERISK_LOCATION = "/etc/asterisk/";

# Retrieve parameters
$extension=$_GET["extension"];
$password=$_GET["password"];
$action=$_GET["action"];
$step=$_GET["step"];

# Set content type
header("Content-Type: text/xml");

# Reboot
if($action=="reboot")
{
    $output = "<AastraIPPhoneExecute>\n";
    $output .= "<ExecuteItem URI=\"Command: Reset\"/>\n";
    $output .= "</AastraIPPhoneExecute>\n";
    header("Content-Length: ".strlen($output));
    echo $output;
    exit;
}

# Input Extension
if ($extension=="")
{

```

```

$output = "<AastraIPPhoneInputScreen type=\"number\" LockIn=\"yes\">\n";
$output .= "<Title>Initial startup</Title>\n";
$output .= "<Prompt>Enter Extension</Prompt>\n";
$output .= "<URL>$XML_SERVER</URL>\n";
$output .= "<Parameter>extension</Parameter>\n";
$output .= "<Default></Default>\n";
$output .= "</AastraIPPhoneInputScreen>\n";
header("Content-Length: ".strlen($output));
echo $output;
exit;
}

# Input Password
if ($password=="")
{
    $output = "<AastraIPPhoneInputScreen type=\"number\" password=\"yes\" LockIn=\"yes\" destroyOnExit=\"yes\">\n";
    $output .= "<Title>Initial startup</Title>\n";
    $output .= "<Prompt>Enter Password</Prompt>\n";
    $output .= "<URL>$XML_SERVER?extension=$extension</URL>\n";
    $output .= "<Parameter>password</Parameter>\n";
    $output .= "<Default></Default>\n";
    $output .= "</AastraIPPhoneInputScreen>\n";
    header("Content-Length: ".strlen($output));
    echo $output;
    exit;
}

# IF authentication failed
if (!$userinfo = verify_user($extension, $password))
{
    # Display error
    $output = "<AastraIPPhoneTextScreen LockIn=\"yes\" destroyOnExit=\"yes\">\n";
    $output .= "<Title>Authentication failed</Title>\n";
    $output .= "<Text>Wrong user and password.</Text>\n";
    $output .= "</AastraIPPhoneTextScreen>\n";
    header("Content-Type: text/xml");
    header("Content-Length: ".strlen($output));
    echo $output;
    exit;
}

# IF already configured
if(lookup_config_file($extension)==1)
{
    # Display error
    $output = "<AastraIPPhoneTextScreen LockIn=\"yes\" destroyOnExit=\"yes\">\n";
    $output .= "<Title>Error</Title>\n";
    $output .= "<Text>Extension already in use.</Text>\n";
    $output .= "</AastraIPPhoneTextScreen>\n";
    header("Content-Type: text/xml");
    header("Content-Length: ".strlen($output));
    echo $output;
    exit;
}

# Get all the user data
$sip_array = parse_ini_file($ASTERISK_LOCATION."sip_additional.conf", true);

# If user not found
if ($sip_array[$extension]==NULL)

```

```

{
# Display error
$output = "<AastraIPPhoneTextScreen LockIn=\"yes\""
destroyOnExit="\"yes\">\n";
$output .= "<Title>Internal error</Title>\n";
$output .= "<Text>Extension is not provisioned.</Text>\n";
$output .= "</AastraIPPhoneTextScreen>\n";
header("Content-Type: text/xml");
header("Content-Length: ".strlen($output));
echo $output;
exit;
}
else
{
# Collect data
$username=get_username($extension);
$secret=get_secret($extension);
$callerid=get_callerid($extension);
}

# Get MAC address and type of phone
$value=Aastra_decode_HTTP_header();

# Create mac.cfg
create_mac($value[1],$extension,$username,$secret,$callerid,$value[0]);

# Update config file
update_config_file($extension,$value[1],$value[3],$value[0]);

# Create Reboot screen
$output = "<AastraIPPhoneTextScreen destroyOnExit=\"yes\">\n";
$output .= "<Title>REBOOT</Title>\n";
$output .= "<Text>Reboot</Text>\n";
$output .= "</AastraIPPhoneTextScreen>\n";
header("Refresh: 1; url=\"$XML_SERVER.\"?action=reboot");

# Display XML Object
header("Content-Type: text/xml");
header("Content-Length: ".strlen($output));
echo $output;
exit;
?>
```

logout.php (located at /var/www/html/startup)

```

<?php
#####
# Sample script for shot desking with Trixbox CE/Asterisk
# Mitel SIP Phones R2.3.0 or better
#
# php source code
# Provided by Mitel 2008
#
# Phone supported
#     Mitel 5i series
#####
##### Includes #####
#####
require_once('include/config.inc.php');
require_once('include/backend.inc.php');

#####
# Private functions
#####

#####
# Aastra_decode_HTTP_header()
#
# Returns an array
#   0 Phone Type
#   1 Phone MAC Address
#   2 Phone firmware version
#####
function Aastra_decode_HTTP_header()
{
$user_agent=$_SERVER["HTTP_USER_AGENT"];
if(stristr($user_agent,"Aastra"))
{
$value=ereg_split("/ MAC:/",$user_agent);
$fin=ereg_split("/ /",$value[1]);
$value[1]=ereg_replace("/\-/","", $fin[0]);
$value[2]=ereg_replace("/V:/","", $fin[1]);
}
else
{
$value[0]="MSIE";
$value[1]="NA";
$value[2]="NA";
}

$value[3]=$_SERVER["REMOTE_ADDR"];

return($value);
}

#####
# update_config_file(extension)
# Update the config file deleting the current extension
#
# Parameters
#     extension      user extension
#####
function update_config_file($extension)
{
# Config file

```

```

$config="startup.cfg";

# Read config file
$array = @parse_ini_file($config, true);
if($array==NULL) $array=array();

# Update config file
$handle = @fopen($config, "w");
if($handle)
{
    foreach($array as $key=>$value)
    {
        if($key!=$extension)
        {
            fputs($handle,"[$key]\n");
            fputs($handle,"mac=".$value['mac']."\n");
            fputs($handle,"ip=".$value['ip']."\n");
            fputs($handle,"model=".$value['model']."\n\n");
        }
    }
    fclose($handle);
}
}

#####
# delete_mac(mac)
# Deletes the MAC.cfg file for the user.
#
# Parameters
#   mac           MAC address of the phone
#
#####
function delete_mac($mac)
{
# Delete MAC.cfg
@unlink("/tftpboot/".$mac.".cfg");
}

#####
# Main code
#####
# GLOBAL VARIABLES
$xml_server = "http://".$_SERVER['SERVER_ADDR']. $_SERVER['SCRIPT_NAME'];

# Retrieve parameters
$extension=$_GET["extension"];
$password=$_GET["password"];
$action=$_GET["action"];

# Set content type
header("Content-Type: text/xml");

# Process action
switch($action)
{
    case 'display':
        # Reboot
        $output      =      "<AastraIPPhoneTextScreen      LockIn=\"yes\""
destroyOnExit="\"yes\">\n";
        $output .= "<Title>REBOOT</Title>\n";
        $output .= "<Text>Reboot.</Text>\n";
        $output .= "</AastraIPPhoneTextScreen>\n";
        break;
}

```

```

default:
    # Input Password
    if ($password=='')
    {
        $output = "<AastraIPPhoneInputScreen type=\"number\""
password=\"yes\" LockIn=\"yes\" destroyOnExit=\"yes\">\n";
        $output .= "<Title>Logout</Title>\n";
        $output .= "<Prompt>Enter Password</Prompt>\n";
        $output .= "<URL>$XML_SERVER?extension=$extension</URL>\n";
        $output .= "<Parameter>password</Parameter>\n";
        $output .= "<Default></Default>\n";
        $output .= "</AastraIPPhoneInputScreen>\n";
    }
else
{
    # IF authentication fails
    if (!verify_user($extension,$password))
    {
        # Display error
        $output = "<AastraIPPhoneTextScreen LockIn=\"yes\""
destroyOnExit=\"yes\">\n";
        $output .= "<Title>Authentication failed</Title>\n";
        $output .= "<Text>Wrong credentials.</Text>\n";
        $output .= "</AastraIPPhoneTextScreen>\n";
    }
else
{
    # Get MAC address and type of phone
    $value=Aastra_decode_HTTP_header();

    # Erase mac.cfg
    delete_mac($value[1]);

    # Update config file
    update_config_file($extension);

    # Reboot needed
    $output = "<AastraIPPhoneExecute>\n";
    $output .= "<ExecuteItem URI=\"$XML_SERVER.?action=display\"/>\n";
    $output .= "<ExecuteItem URI=\"Command:FastReboot\"/>\n";
    $output .= "</AastraIPPhoneExecute>\n";
}
break;
}

# Display XML Object
header("Content-Type: text/xml");
header("Content-Length: ".strlen($output));
echo $output;
exit;
?>

```

17 APPENDIX F: CSV BASED DIRECTORY

17.1 INTRODUCTION

The application described in this chapter is a generic directory application using a CSV file as data source as well as a server-side speed dial application which can be linked from the directory application.

The directory application allows the user to perform a lookup based on

- The first letters of the first name
- The first letters of the last name
- The first letters of the Company name
- (at least 3) Letters anywhere in the complete name or company name

Also, it allows the user to configure:

- The results display format: 'first name last name' or 'last name first name'
- Sorting index: 'last name' or 'first name'

The directory application can also be password protected (configured in config/directory.conf), the password is requested only for the first use, once authenticated by its MAC address, the phone no longer requires the password check.

The source code is provided in the XML SDK as a zip file called csv_directory_4.1.0.zip



Note: the source code is not supported by Mitel, it is provided only as an example.

17.2 PHONE COMPATIBILITY

The directory and speed dial applications are available for

- Mitel 6751i, 6753i, 6755i, 6757i, 6757iCT, 6735i, 6737i
- Mitel 9143i, 9480i, 9480iCT
- Mitel 6730i/6731i
- Mitel 6863i/6865i/6867i/6869i

But some limitations apply in the directory application when the phone is a non softkey phone a user cannot:

- set a speed dial from the directory application
- change sorting index and display format
- access to record details
- perform a search using first name or last name

17.3 INSTALLATION

The provided scripts must be extracted under the ROOT directory of the HTTP server in a 'xml'directory, a cache directory (default /var/cache/aastra) must also be created with read/write access for the HTTP server user.

The cache directory can be configured in config/server.conf, see chapter 17.6.1 for more details.

17.4 XML KEY CONFIGURATION

Directory

The uri to use is

<http://myserver.com/xml/directory/directory.php?user=USER&source=SOURCE>

Where

- myserver.com is the name or IP address of your HTTP server
- USER is the userID, if not provided the script uses the phone MAC address as the userID.
- SOURCE is the name of the csv file located in the 'directory' directory, if not provided, the script uses the file configured as default in config/directory.conf

Speed dial

The uri to use is

<http://myserver.com/xml/directory/speed.php?user=USER>

Where

- myserver.com is the name or IP address of your HTTP server
- USER is the userID, if not provided the script uses the phone MAC address as the userID.



Note: USER must be the same for both applications in order to have the speed dial integrated in the directory application.

17.5 CSV FILE FORMAT

The CSV file must respect the following format:

First name, Last name, Company, Title, Work, Home, Mobile

The application is provided with a sample database 'directory/directory.txt' where all the fields have been randomly generated.

17.6 CONFIGURATION FILES

17.6.1 SERVER.CONF

This file includes configuration parameters for the XML server.

```
[General]
# Public IP address (optional), if not provided $_SERVER['HTTP_HOST'] is used
public=
# Path for the Mitel cache directory (optional), if not provided
/var/cache/aastra is used
cache=
# Path for the TFTP root directory (optional) if not provided /tftpboot is used
tftp=
# Path for the XML directory behind the HTTP Server (optional), default is xml
xmldirectory=
# Mode DEBUG (0 or 1), default is 0
debug=
# Mode TRACE (0 or 1), default is 0
trace=
# Forced language (optional), can be en, de, fr...
language=
```

When activated, the traces are stored in a log file located in the 'cache' directory (by default /var/cache/aastra) indexed by the date, a file is generated per day.

17.6.2 DIRECTORY.CONF

This file includes configuration parameters for the Directory application.

```
#####
# directory.conf
#
# Configuration file for the directory application
#####

#####
# Global configuration
#
# [general]
# password      To protect the application with a password
# speeddial     Configure is speeddial is enabled (0 or 1) (optional)
# default        Name of the default csv file located in the directory
#####
[General]
password=
speeddial=
default=directory
#####
# Dialing profile
#
# [Dialplan]
# country        country code
# long distance   long distance prefix
# international    international prefix
# outgoing        outgoing prefix
# local           list of local phone numbers prefixes separated by a comma
#####
[Dialplan]
country=1
long distance=1
international=011
outgoing=9
local=
```

17.7 APPLICATION FILES

/	Root Directory
language.ini	Language configuration file
license.txt	License file
/directory/	Directory for the applications
directory.php	Directory application
directory.txt	Sample CSV file
speed.php	Speed dial application
/config/	Directory for configuration files

server.conf	Server configuration
directory.conf	Directory configuration
/include/	Directory for common includes
AastraCommon.php	Common Mitel functions
AastralIPPhone.php	
AastralIPPhone.class.php	
AastralIPPhoneConfiguration.class.php	
AastralIPPhoneConfigurationEntry.class.php	
AastralIPPhoneExecute.class.php	
AastralIPPhoneExecuteEntry.class.php	
AastralIPPhoneInputScreen.class.php	
AastralIPPhoneInputScreenEntry.class.php	Mitel XML objects php classes
AastralIPPhoneSoftkeyEntry.class.php	
AastralIPPhoneStatus.class.php	
AastralIPPhoneStatusEntry.class.php	
AastralIPPhoneTextMenu.class.php	
AastralIPPhoneTextMenuEntry.class.php	
AastralIPPhoneTextScreen.class.php	

18 APPENDIX G: LDAP DIRECTORY

18.1 INTRODUCTION

This appendix describes how to provide access to the Corporate Directory (Active Directory) from the Mitel SIP phones. As LDAP protocol is used to access Active Directory, this document is also valid for any other LDAP enabled directory server. This document is solely about user initiated directory lookup, it does not cover Corporate Directory based caller ID lookup for incoming or outgoing calls.

There is no native LDAP client in the Mitel SIP phone, but the phone's inbuilt XML browser can be used to access a XML Proxy Server which then communicates with the LDAP server. This architecture offers more flexibility than a native LDAP client in the phone since the logic of the LDAP directory application lies in the XML LDAP application (e.g. a PHP script) running on the XML Proxy Server rather than in the LDAP client embedded in the phone's firmware. The following features can be easily controlled by changing the XML LDAP application on the XML Proxy Server:

- Customized search fields on the phone (e.g. first name / last name / any name / department / ...)
- Customized LDAP-attributes to be included in the search result (such as title, department, address)
- Number translation (digits to be removed from / added to the numbers found in the LDAP before dialling – e.g. external prefix)

The message flow is given by the diagram below:

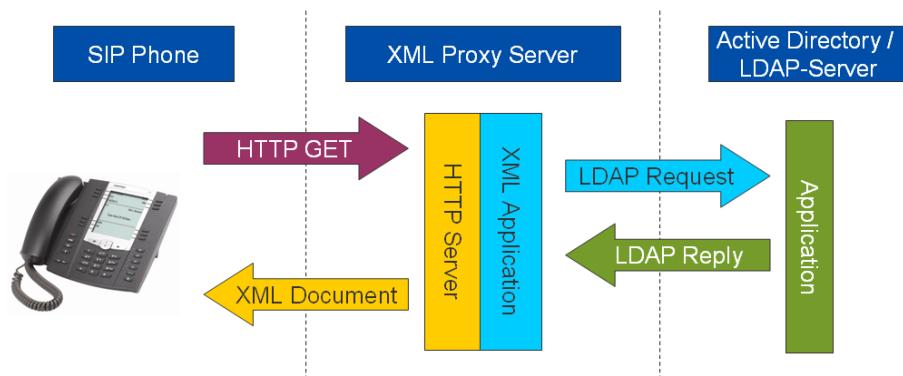


Figure 105: LDAP directory message flow

The directory application allows the user to perform a lookup based on

- The first letters of the first name AND last name
- (at least 3) Letters anywhere in the complete name

The source code is provided in the XML SDK as a zip file called `ldap_directory_4.1.0.zip`



Note: the source code is not supported by Mitel, it is provided only as an example.

18.2 INSTALLATION

The provided scripts must be extracted under the ROOT directory of the HTTP server in a 'xml'directory, a cache directory (default /var/cache/aastra) must also be created with read/write access for the HTTP server user.

The cache directory can be configured in config/server.conf, see chapter 18.5.1 for more details.

The Web server must support PHP 5.x or higher and the PHP LDAP extension must be available in PHP. Typically, Apache Web server is used. Apache runs on most operating systems.

Windows platforms

To enable the PHP LDAP extension, this line must be inserted into php.ini:

```
extension=php_ldap.dll
```

Linux platforms

Just install the php-ldap package (via yum or via rpm)

To check whether PHP 5.x (or higher) and the PHP LDAP extensions are properly installed, create a PHP script with the following content and save it under the Web server's root directory:

```
<?php phpinfo(); ?>
```

Then point your Web browser to this script. Check the PHP version and make sure there is a section "ldap" with a table containing the key "LDAP Support" and corresponding value "enabled"

18.3 NETWORK REQUIREMENTS

18.3.1 PHONE -> XML PROXY SERVER

The phone must be able to reach the XML Proxy Server. Typically, the XML Proxy Server will run on port 80/tcp, but any other port can be used as well. The phone can be behind NAT as the TCP requests will always be phone initiated.

In case there is a firewall between the phone and the XML Proxy Server, the firewall must allow phone initiated TCP sessions towards the Web server port on the XML Proxy Server.

18.3.2 XML PROXY SERVER -> LDAP-SERVER

The XML Proxy Server must be able to reach the LDAP-Server on port 389/tcp (default LDAP port) or 3268/tcp (default LDAP port on Active Directory Server) or any other port that is used for LDAP access.

Requests will always be XML Proxy Server initiated.

18.4 ACTIVE DIRECTORY / LDAP-SERVER REQUIREMENTS

The LDAP / Active Directory Server must allow LDAP search requests. Depending on the server's configuration, anonymous access (anonymous bind) is allowed. If not, a username (User DN) and password must be provided. Active Directory typically does not allow anonymous access.

Also the Search Base / Root DN needs to be known. This information should be requested from the LDAP / Active Server administrator.

To test the LDAP server access, use a tool like "Softerra LDAP Browser" (free). If anonymous access is supported, setup a new profile with "Anonymous Bind" selected. Otherwise provide User DN and password. Configure the server's IP address and port plus the "Base DN" and you should be able to browse the LDAP tree.

18.5 CONFIGURATION FILES

18.5.1 SERVER.CONF

This file includes configuration parameters for the XML server.

```
[General]
# Public IP address (optional), if not provided ${_SERVER['HTTP_HOST']} is used
public=
# Path for the Mitel cache directory (optional), if not provided
/var/cache/astra is used
cache=
# Path for the TFTP root directory (optional) if not provided /tftpboot is used
tftp=
# Path for the XML directory behind the HTTP Server (optional), default is xml
xmldirectory=
# Mode DEBUG (0 or 1), default is 0
debug=
# Mode TRACE (0 or 1), default is 0
trace=
# Forced language (optional), can be en, de, fr...
language=
```

When activated, the traces are stored in a log file located in the 'cache' directory (by default /var/cache/astra) indexed by the date, a file is generated per day.

18.5.2 LDAP_DIRECTORY.CONF

This file includes configuration parameters for the LDAP Directory application.

```
#####
# ldap_directory.conf
#
# Configuration file for the LDAP directory application
#####
#####

#####
# Global configuration
#
# [LDAP Server]
# hostname      Hostname or IP address of LDAP server
# port          TCP server port of LDAP server. Typically this is 389 or 3268
# baseDN        Base / Root Search DN. Example: dc=company, dc=com
# userdomain   User domain to connect to the LDAP server (optional)
# username      User DN to connect to the LDAP server. Leave blank if anonymous bind is used.
# password      Password for the User DN. Leave blank if anonymous bind is used.

#####
#[LDAP_Server]
hostname=
port=3268
basedn=
userdomain=
username=
password=

#####
# Dialing profile
#
# [Dialplan]
# countrycode  Country code
#                 If phone number starts with "+<countrycode>", this will be removed
#
# longdistance Long distance prefix
#                 This prefix will be added to the number in case +<countrycode> has been stripped.
#                 Leave blank if not needed.
#
# international International prefix
#                 The "+" sign will be replaced with this prefix
#
# outgoing      Outgoing prefix
#                 Prefix that needs to be appended for outgoing calls (all call but local calls), e.g. 0 or 9
#
# local         List of local PBX number prefixes separated by a comma (in national format).
#                 Prefix will be removed, no outgoing prefix will be added.
#                 Examples: local=905760,978262
#                 --> 9057602222 will be replaced by 2222 and 9782623333 will be replaced by 3333.
#
# localextlen  Numbers with this number of digits or less will be treated as local PBX extensions
#                 No prefix added (useful in case numbers are stored in local format in LDAP)
```

```
#####
#[Dialplan]
countrycode=1
longdistance=1
international=011
outgoing=
local=
localextlen=4
```

19 APPENDIX H: PICTURECALLERID (6867I, 6869I, 6739I)

19.1 INTRODUCTION

This feature, unique to the Mitel 6739i, allows the display of a picture referenced by the Caller ID number for an incoming and an outgoing call.

When the user makes or receives a call, the Mitel 6739i (by configuration) fetches an image stored on a TFTP/FTP/HTTP/HTTPS server and displays it.

For instance, if the incoming or outgoing number is “9725551234” the phone makes a request for a file named “9725551234.png” which must be

6739i

- 150x200 pixels
- png format
- 24 bits depth colors

6867i/6869i

- Up to 150x200 pixels (image is rescaled)
- png format
- 24 or 32 bits depth colors

in order to be displayed. The image is cached in the phone until the next reboot.

If no image matching the request is found on the server or in its cache, the phone displays a default image (below).



This implementation means that the server must host all the pictures in the right format which can be pretty tedious.

19.2 APPLICATION IMPLEMENTATION

To simplify the deployment of the picture Caller ID, Mitel has developed an application which answers to the phone requests but also:

- converts any size picture (png, jpeg, gif) to the right format and cache the converted picture,

- allows number/picture matching (cell phone number, home number...),
- allows phone number pattern matching,
- allows to customize the matching picture by adding a custom label.

With this application, an administrator does not have to convert the pictures to the right format, he just has to put the pictures in any format (jpeg, gif or png) in the "pictures" directory for instance using XXXX.yyy where XXXX is the user extension number.

The administrator can also create number or pattern matching to display all kind of pictures using the configuration file "pictureID.conf" as described in chapter 19.5.2.3.

Here is how the algorithm works (NUMBER is the incoming or outgoing number)

- Checks if NUMBER.png is in the cache directory (if yes sends the image back)
- Remove local prefixes and check the transformed number (if yes sends the image back)
- Check basic mapping and check the transformed number (if yes sends the image back)
- Check advanced pattern matching and check the transformed number (if yes sends the image back)
- Remove external prefix and check the transformed number (if yes sends the image back)
- Remove international prefix and check the transformed number (if yes sends the image back)
- Sends a HTTP 404 (Image Not found) or the configured image

19.3 REQUIREMENTS/COMPATIBILITY

19.3.1 HTTP SERVER

Operating System:

- Microsoft Windows Server 2003/2008
- Microsoft XP/Vista/7
- Most flavors of Linux

HTTP Server:

- Microsoft IIS
- Apache
- Lighttpd
- PHP
 - Release 5.0 or better,
 - Configured to be called by the HTTP server for '.php' files
 - php-gd extension

19.3.2 MITEL 6739I

The Picture Caller ID application is available only for the following phones:

Mitel 6739i using **firmware release 3.0.1** or better

19.4 INSTALLATION

19.4.1 INTRODUCTION

The Picture Caller ID application is provided to allow generic implementation and also for testing purpose as a zip file which includes only the source code to be installed on an existing HTTP Server "pictureCallerID_4.1.0.zip".

19.4.2 HTTP SERVER

The Picture Caller ID application is a single php script which can be installed anywhere behind the root directory of any HTTP Server supporting php scripts.

19.4.3 PACKAGE INSTALLATION

Just untar the provided tarball wherever you want behind the HTTP Server root directory (typically /var/www/html with Apache on Linux).

Just make sure that

- The “cache” directory is accessible in read/write for the HTTP Server user
- The “pictures” directory is accessible in read for the HTTP Server user
- The Picture Caller ID can be relocated under any directory.

19.4.4 TEST YOUR INSTALLATION

To test the HTTP server direct your Web browser (Internet Explorer, Firefox...) to


<http://MYSERVERIP/imageServer.php?0000.png> if the application has been installed at the HTTP Server root directory

or

<http://MYSERVERIP/PATH/imageServer.php?0000.png> if the application has been installed at a different directory

Where MYSERVERIP is the IP address/name of your server and PATH the directory behind the HTTP Server root directory.

You should see the following page:

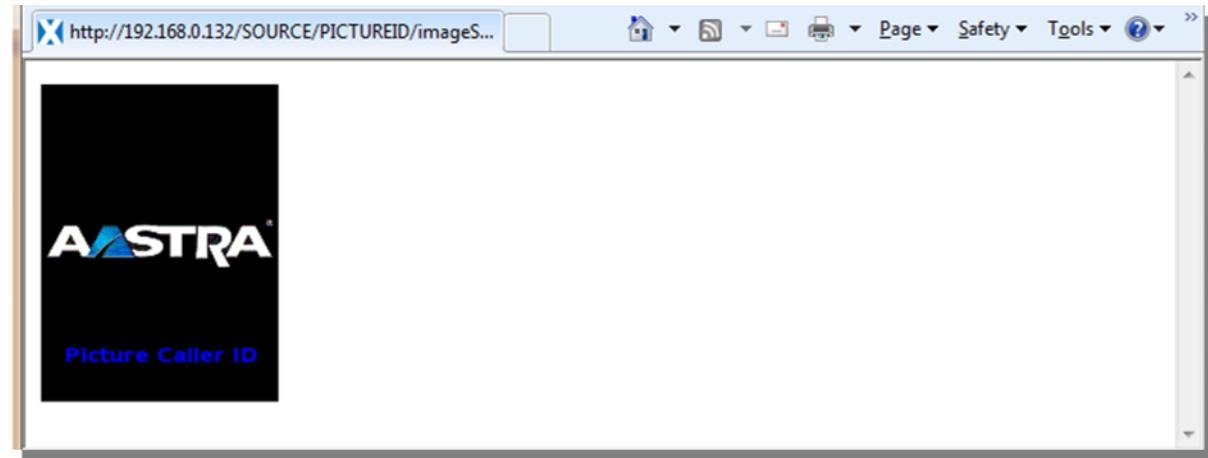

19.4.5 TROUBLESHOOTING

- If the previous test did not work here are a couple of things you may want to check:
- Is the HTTP Server running?
- Is php supported?
- Is php-gd extension installed?
- Are the user rights OK for “pictures” and “cache” directories?

19.4.6 WINDOWS PC USING XAMPP LITE

Please refer to chapter 11.2 on how to use XAMPP as an http server for this application.

19.5 CONFIGURATION

19.5.1 PHONE CONFIGURATION

The Picture Caller ID feature is configured using a parameter called “image server uri” in the phone config files (aastra.cfg or MAC.cfg)

image server uri: URL to access the Picture Caller ID application

HTTP Server implementation

image server uri: http://MYSERVERIP/PATH/imageServer.php?

- where MYSERVERIP is the IP address/name of your HTTP server and PATH the directory behind the HTTP Server root directory.

XAMPP Implementation

image server uri: http://MYPC/imageServer.php?

- where MYPC is the IP address/name of the PC where the XAMPP package has been installed.



Note: the “?” at the end of the uri is mandatory, it is not a typo.

19.5.2 APPLICATION CONFIGURATION

The application can be configured by modifying ‘pictureID.conf’ in the main directory; this configuration file contains 3 sections.



Note: Changes in this file are dynamic.

19.5.2.1 General parameters

This section includes the global configuration parameters:

- Location of the ‘pictures’ directory
- Location of the ‘cache’ directory
- Enable or disable upscaling pictures
- Name and customization of the default picture (optional)

```
#####
# Global parameters
#
# [General]
# pictures          Directory for the raw pictures
#                   Default is ./pictures
#                   Must be r for HTTP Server user
#
# cache             Directory for the cached pictures
#                   Default is ./cache
#                   Must be r/w for HTTP Server user
#
# blowup            Enable (1) or disable (0) image scaling smaller than
150x200 pixels.
#                   This may/will lead to grainy/pixelized images.
#                   Default is disable
# default           Provides a default image when the number does not match
any picture. A 404 is sent if no number is provided though.
#                   default=mapped_number
#                   See the [Numbers] section for the format of the line
#####[General]
pictures=
cache=
blowup=
default=
```

19.5.2.2 Dialing plan

This section contains the PBX dialing plan which will be used to transform the numbers:

- Country code
- Long distance prefix
- International prefix
- Outgoing prefix
- Local prefix(es)

```

#####
# Dialing profile
#
# [Dialplan]
# country      Country code
#               If phone number starts with "+<country>", this will be
#               removed
#
# long distance   Long distance prefix
#                   This prefix will be added to the number in case +<country>
#                   has been stripped.
#                   Leave blank if not needed.
#
# international    International prefix
#                   The "+" sign will be replaced with this prefix
#
# outgoing        Outgoing prefix
#                   Prefix that needs to be appended for outgoing calls
#                   (all call but local calls), e.g. 0 or 9
#
# local           List of local PBX number prefixes separated by a comma
#                   (in national format). Prefix will be removed, no outgoing
#                   prefix will be added.
#                   Examples: local=905760,978262
#                   --> 9057602222 will be replaced by 2222 and 9782623333 will
#                   be replaced by 3333.
#####
[Dialplan]
country=1
long distance=1
international=011
outgoing=
local=

```

19.5.2.3 Number transformations

This section describes the number transformations you want the application to use to display a given picture as well as the optional customization of the picture.

Each line is formatted like this

- Number and/or patterns=picture number or name,[Optional customization]
- Pattern format is P followed by:
- any digit including * or #
- X digit between 0 and 9
- Z digit between 1 and 9
- N digit between 2 and 9

The optional customization allows you to add a label on the displayed picture by defining:

- the label itself
- its vertical position in pixels (1 to 200)
- its alignment (left, center, right)
- its color
- its font size

```
#####
# Number mapping
#
# Line Format
# [Numbers]
#           number and/or patterns comma separated=mapped_number or
mappedname,LABEL|YPOSITION|ALIGNMENT|COLOR|FONTSIZE
#   Simple number matching
#       it can be used to map multiple phone numbers (cell, home , other) to a
user
#   Pattern matching
#       it can be used to map open numbers
#       Pattern format is P followed by
#           any digit including * or #
#           X digit between 0 and 9
#           Z digit between 1 and 9
#           N digit between 2 and 9
#           . indicates an open length number, must be positioned at the end
of the pattern
#       The entries in the [Numbers] section are processed based on the order in
#       the file, so it is recommended to put the open patterns at the end.
#
# Where
#   LABEL is the label to be displayed on the picture
#   YPOSITION is the vertical position of the label (between 1 and 200),
default is 100
#   ALIGNMENT is the horizontal alignment left|center|right, default is center
#           COLOR is the label color
yellow|orange|pink|purple|black|grey|red|brown|tan|magenta|blue|green|white
(default is white)
#   FONTSIZE is the font size in pixels (between 8 and 24) default is 10
#
# Example
# [Numbers]
# 0795551234=2299
#   Will display the picture "2299" when 0795551234 is dialed or incoming
# P972XXXXXXX,P469XXXXXXX,P214XXXXXX=default,"DALLAS, TX"|187|center|blue|10
#   Will display the picture "default" with a centered blue label "Dallas, TX"
font size 10 at vertical position 187 when 10 digits numbers starting with 972
or 469 or 214 are dialed or incoming
# P44.=UK
#   Will display the picture "UK" when any number starting with 44 is dialed or
is incoming
#####
[Numbers]
*97,*98=voicemail
*76,*78,*79,*21,*65=phone
```

19.5.3 NUMBER MATCHING EXAMPLES

The number matching can be used to map external phone numbers (cell phone, home...) to a local extension.

John Doe is extension 2000 on the local PBX, '2000.jpg' is available in the "pictures" directory.

The following line in the configuration file

4085551234,3105551234=2000

Will display the '2000.jpeg' picture when '4085551234' or '3105551234' are calling or being called.

19.5.4 PATTERN MATCHING EXAMPLES

The pattern matching allows you to define hierarchical rules to match a number with a picture; the order in the configuration file is significant.

Example 1

P972XXXXXXX,P469XXXXXXX,P214XXXXXXX =default,"DALLAS, TX"|187|center|red|10

Will display the following picture on the phone

 DALLAS, TX	When a 10 digit number starting with 972, 469 or 214 is calling or being called. .
--	---

Example 2

This example demonstrates the relevance of the lines order in the configuration files.

P972555XXXX=default,"ACME Dallas"|187|center|blue|10

P972XXXXXXX,P469XXXXXXX,P214XXXXXXX=default,"DALLAS, TX"|187|center|red|10

Will display:


 ACME Dallas	When a 10 digit number starting with 972555 is calling or being called.
 DALLAS, TX	When a 10 digit number starting with 972 (except if it is starting with 972555), 469 or 214 is calling or being called.

Example 3

This example demonstrates how to use undefined length patterns.

P44.= default,"United Kingdom"|187|center|red|10

Will display the following picture

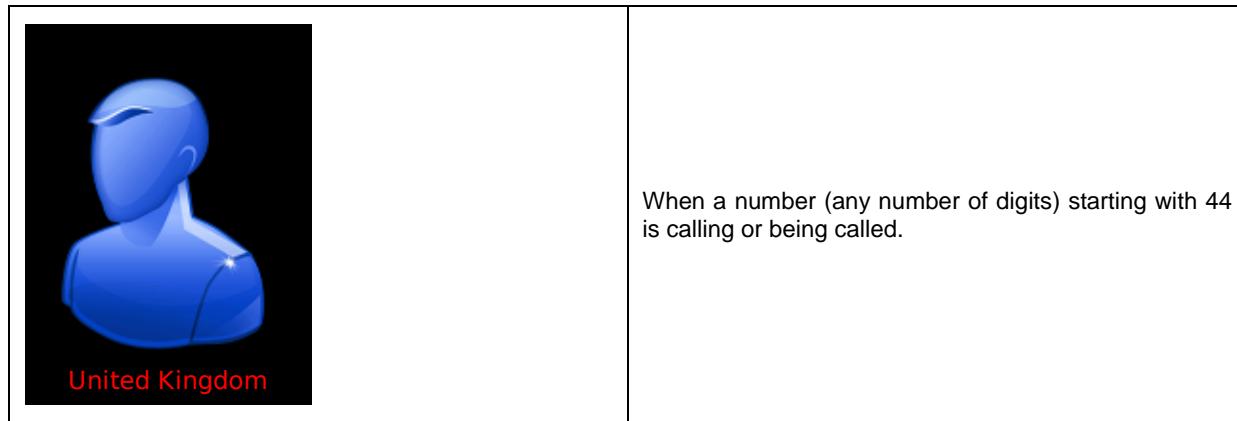

When a number (any number of digits) starting with 44 is calling or being called.

19.6 FILES

This chapter describes the files provided in the package

File	Comment
./	Root directory
imageServer.php	PHP script for the Picture Caller ID application
License.txt	License file
pictureID.conf	Configuration file
./cache	Cache directory
./fonts	Font directory
DejaVuSans-Bold.ttf	True Type font used to customize the labels
./pictures	Picture directory
Aastra.gif	Sample graphic files
conference.png	
default.png	
phone.png	
time.png	
voicemail.png	
Various country flags (US, UK, DE...)	

20 LAST PAGE OF THE DOCUMENT

PA-001011-05-00

This page is intentionally left blank